



McKechnie®
Transforming Aluminium

Mill Run Standards

Catalogue and Technical Data

9th Edition

February 2025



Edition 9.0

Contents

Technical Information & Data



McKechnie®
Transforming Aluminium

INTRODUCTION		Page 3
EXTRUSION DATA		Page 5
IMPORTANT INFORMATION ON ORDER & PRICING REQUIREMENTS		Page 18
TOLERANCES		Page 19
Group 1 - GEOMETRIC SHAPES		
Angles	Group 1.1	Page 29
Channels	Group 1.2	Page 34
Flats and Half Rounds	Group 1.3	Page 38
Hollow Squares and Rectangles	Group 1.4	Page 43
I Beams	Group 1.5	Page 49
Rounds, Squares and Hexagons	Group 1.6	Page 50
Tees	Group 1.7	Page 53
Extruded Tubes	Group 1.8	Page 54
Zeds	Group 1.9	Page 57
Top Hats	Group 1.10	Page 58
Miscellaneous Angles	Group 1.11	Page 62
Miscellaneous Channels	Group 1.12	Page 64
Miscellaneous Tees	Group 1.13	Page 70
Miscellaneous Tubes	Group 1.14	Page 71
Group 2 - BUILDING EXTERIOR		
Balustrades	Group 2.1	Page 75
Coolstore and Annexes	Group 2.2	Page 78
Glazing Bars	Group 2.3	Page 86
Louvre Blades	Group 2.4	Page 90
Pacific Shopfront 75 Series (NZ only)	Group 2.5	Page 97
Pacific Shopfront 100 Series (NZ only)	Group 2.6	Page 103
Pacific Commercial Doors (NZ only)	Group 2.7	Page 107
Commercial Shopfront (Australia only)	Group 2.8	Page 112
Thresholds	Group 2.10	Page 113
Head Flashings and Sill Pans	Group 2.11	Page 114
Group 3 - BUILDING INTERIOR		
Sliding Doors and Wardrobe Sections	Group 3.3	Page 119
Stair Treads and Nosings	Group 3.4	Page 120
Trims and Mouldings	Group 3.5	Page 121
Wallboard Jointers	Group 3.6	Page 122
Internal Glazing	Group 3.7	Page 125
Partition Posts	Group 3.8	Page 127



McKechnie®
Transforming Aluminium

Contents

Technical Information & Data

Group 4 - SECURITY

Security Doors and Windows	Group 4.1	Page 129
Security Mesh	Group 4.2	Page 133
Staking Angles	Group 4.3	Page 134
Insect Screens	Group 4.4	Page 139

Group 5 - TRANSPORT

Bull Bars	Group 5.1	Page 143
Drip moulds and Awnings	Group 5.2	Page 148
Marine	Group 5.3	Page 149
Light Duty 1 Tonne Truck Deck	Group 5.4	Page 152
Medium Duty 1-2 Tonne Truck Deck	Group 5.5	Page 153
General 1-2 Tonne Truck Deck	Group 5.6	Page 154
Titan 1-2 Tonne Truck Deck	Group 5.7	Page 155
4-6 Tonne Truck Deck	Group 5.8	Page 157
16 Tonne Truck Deck	Group 5.9	Page 159
Miscellaneous Flooring	Group 5.10	Page 160
Sideboard Options	Group 5.11	Page 161
Rope Rail Brackets	Group 5.12	Page 163
Curtain Side Top Tracks	Group 2.13	Page 164
Headboard and Rub Rails	Group 5.14	Page 165
Cargo Van Sections	Group 5.15	Page 166
Air Flow Flooring	Group 5.16	Page 169
Miscellaneous Transport	Group 5.17	Page 170

MISCELLANEOUS

Cable Ladders	Misc 1.1	Page 173
Picture Frames	Misc 2.1	Page 174
Signs	Misc 3.1	Page 175
Yacht Masts	Misc 4.1	Page 178
Miscellaneous	Misc 5.1	Page 179

INDEX

Page 183



McKechnie®
Transforming Aluminium

Extrusion Data And Tolerances

February 2025



Edition 9.0

Introduction



McKechnie®
Transforming Aluminium

McKechnie® Aluminium is one of Australasia's leading aluminium specialists, manufacturing an extensive range of standard extrusions, customer exclusive extrusion and providing world class aluminium fabrication services.

McKechnie® Aluminium is the only Australasian manufacturer who provides a full "foundry to fabrication" offer with service levels you can only get from a local supplier. We are proud of our 60 years in business and the unmatched level of technical expertise and market experience this has given us.

The range of standard shapes in this catalogue will meet most customers' requirements, however if you have an application or design that is unique to you, we can easily provide a custom product or solution specifically for you.

To make it easy for you to find the section you are looking for, this catalogue has been organised into product groups and has a full index of sections and page numbers on page 209.

Design:

All sections shown in this catalogue are McKechnie® Aluminium standard designs and available to all customers. These designs are owned by McKechnie® Aluminium and protected by copyright.

Availability:

Products in this catalogue are subject to minimum production runs and normal production lead times at time of order. Smaller quantities of these extrusions can be supplied ex-stock via our McKechnie® Direct channel with next day delivery nationwide.

Additional Sections will continue to be added to our range so visit our website www.mckechnie.co.nz for the latest version of this catalogue or call us to ask about any sections not listed.

Surface Finishing, Fabrication and Pricing:

Please contact your nearest McKechnie® Aluminium sales outlet (details on next page). We can also offer surface-finishing options, powder-coating and anodising, and such services as precision cutting, punching, drilling via our Fabrication operation.

Technical Data:

The alloys available and extrusion tolerances are listed in the front of this catalogue. This information is a guide only. Please contact us if you have any questions on alloys or tolerances not covered in this catalogue.

- Drawings individually listed are full-scale unless endorsed otherwise.
- All sharp corners are slightly radiussed.

This catalogue is available both wholly and in part through Electronic Communication. Access information available on request.



McKechnie
Transforming Aluminium

Introduction

NEW ZEALAND

Mill & Fabrication
Stocked Product & Standard Geometric Shapes

0800 625 000
0800 625 111
or email distribution@mckechnie.co.nz

New Plymouth:
(Head Office & Factory)

36 Paraiti Road, Bell Block 4373
Private Bag 2007, New Plymouth 4243

AUSTRALIA

PHONE:
NSW, ACT, SA
QLD, VIC, Northern Rivers NSW, TAS

1 800 004 911
+61 408 624 868
+61 412 129 482

VISIT OUR WEBSITE

www.mckechnie.co.nz

Copyright © Terms of Use

McKechnie® Aluminium Solutions Limited makes this Catalogue available for the general use and reference of customers. In doing so, all use of the Catalogue is governed by these terms of use.

Copyright in this Catalogue and, where applicable intellectual property rights in any proprietary products and systems contained, are reserved in all respects to McKechnie® Aluminium Solutions Ltd. No copying, appropriation or modification of this Catalogue, or use of any proprietary products and systems, is permitted without express written consent of McKechnie® Aluminium Solutions Ltd.

All registered trademark rights in the name "McKechnie" and logo are reserved to McKechnie® Aluminium Solutions Ltd.


All information contained in this Catalogue should be considered for general information only. While great care has been taken to ensure the information contained is complete and accurate this Catalogue does not constitute an offer by McKechnie® Aluminium Solutions Ltd to sell or supply any item nor that an item will at all times be available for supply.

McKechnie® Aluminium Solutions Ltd reserves the right at any time to cease supply of items (whether permanently or temporarily) and/or to alter the specifications or nature of any item contained in the Catalogue. A customer must always specifically enquire at McKechnie® to determine whether any item required is available and in the form required by the customer.

Any order by a customer will always be subject to the Terms of Trade in use from time to time by McKechnie® Aluminium Solutions Ltd.

McKechnie® Aluminium Solutions Ltd accepts no liability or responsibility for any loss, damage, cost or expense in any form suffered by any person and which results from any error or omission in this Catalogue or as a result of any inability to supply an item from this Catalogue for any reason (whether temporary or permanent). McKechnie® further excludes any representation or warranty that the items in the Catalogue are fit or suitable for any particular purpose and on each occasion a customer must order items solely in reliance on their own judgment.

© McKechnie® Aluminium Solutions Ltd (2009-2025).



McKechnie®
Transforming Aluminium

ALUMINIUM IN ARCHITECTURE

The growth of aluminium in architecture in New Zealand has been quite dramatic in recent years. When McKechnie® Aluminium first commenced extruding aluminium in 1958 in this country, domestic windows, patio doors, and generally domestic components of aluminium were virtually unknown. Commercial window applications were in their early stages while the interiors of commercial buildings contained virtually no aluminium. Partitions, for example, were almost entirely of solid-wall construction.

Since then we have reached the stage where aluminium is virtually standard in many of these areas and its proportional penetration continues to grow. Aluminium is still the 'modern' metal. It lends itself well to the slender, open appearance which is evident in many buildings. Commercial building construction has passed through a number of phases in which the trend in the sixties was towards curtain-wall construction, whilst now there is greater emphasis on the use of individual windows and various building panels.

Internally, demountable partitioning is now almost universal, using hollow framing members, often aluminium extrusions designed to take electrical and other services. These partitions can be easily moved according to demand from time to time, thus facilitating the most effective use of ever increasingly expensive office accommodation.

One of the major areas of aluminium penetration has been in windows and doors, both domestic and commercial, and in shop fronts. Aluminium gives the architect almost unlimited freedom in setting out his window requirements and allows him to specify profiles which satisfy his needs and offer him a completely draft-proof window, permanent in its proof against infiltration. Good provision of weather stripping is no problem with extruded sections and is generally used.

Aluminium in window and door frames in the various finishes available provides an excellent blend, often with striking effect, with timber paneling, bricks, stone, and most of the decorative building materials available. Aluminium has proved itself eminently suitable as a metal for the manufacture of windows, doors, shop fronts and similar installations since it can be formed and fabricated in ways hitherto commercially impossible for both wood and steel. As a result, various new forms of fenestration have been made economically possible.

High-purity aluminium is soft and ductile, and strength and hardness are acquired by the addition of various alloying elements such as magnesium, silicon, manganese and copper. Aluminium products are either wrought or cast, depending on whether their shape results from mechanically working the metal or from casting molten metal. Wrought alloys are used to produce extruded shapes, forgings and sheet products while cast alloys are used for the production of ornamental components and the mass-production of standard parts.

Aluminium is light in weight, being, for example, three times lighter than steel. It has excellent strength and durability. Properly installed, aluminium can provide years of dependable service, with its high, inherent resistance to atmospheric corrosion. Unlike many other metals, aluminium does not cause unsightly weathering stains on other materials. It responds well to various forming operations, cutting, welding and forging, and thus offers considerable flexibility in its use. It can be joined by all commonly-used methods such as welding, and use of adhesives and mechanical fasteners. It is non-sparking and non-magnetic. Aluminium has certain properties which require the architect's attention in using it most effectively.

The selection of an alloy for a particular application should be based on a careful evaluation of design requirements by way of mechanical properties and finishing characteristics. McKechnie® Aluminium alloy 6060 has proved highly successful for extruded sections for the manufacture of windows, doors and architectural joinery in various finishes. Other alloys can be used for certain specific extruded applications.

Aluminium extrusions have a comparatively high coefficient of expansion which is 0.000023mm per mm length of extrusion per 30° C. A length of aluminium extrusion 6 metres long will expand over 4mm when the temperature rises 30° C. When designing, especially building design, provision should be made for expansion and contraction caused by temperature changes. Thermal expansion is particularly important where aluminium extrusions are used with other materials which have different expansion rates.

Practically all aluminium alloys can be welded. For fusion welding the inert gas-shielded arc methods are now used almost exclusively and offer the advantages of high welding speed and freedom from flux problems.



McKechnie[®]
Transforming Aluminium

THE NATURE AND BENEFITS OF ANODISED ALUMINIUM

The capacity of aluminium to respond to anodising, the most familiar of finishes, makes aluminium a most important metal in a quite fundamental way. The fact that aluminium can take on this attractive, durable and tough-wearing finish makes it possible to exploit its strength and lightness in a large number of applications, particularly in building construction. Anodising essentially is an induced thickening of the natural protective oxide film on the metal's surface. It is a conversion of the parent metal and thus is not a 'coating' in the usual sense.

Unless severely deformed or stressed by excessive thermal movement, the anodic film will not chip, peel, or crack. With conventional sulphuric acid anodising, the alloys usually anodised produce a clear, hard, and extremely corrosion-resistant film capable of being coloured. The functional and decorative potential this confers on the metal is widely exploited in applications ranging from building components to domestic cookware.

Variations of the conventional electrolyte composition and process variables produce anodic coatings of distinctive functional properties. Thus, very hard anodic films are developed to provide abrasion resistant surfaces on gears, pistons, bearings, and similar components.

Anodic films are coloured by a variety of methods. Conventional sulphuric acid films are microscopically porous, and organic or inorganic dyes and pigments may be incorporated and sealed in the film. The more durable coloured films necessary in exposed environments are more usually produced integrally with the evolution of the anodic layer and are quite permanent.

Whether clear or coloured, it is important that designers understand the essential nature of anodising. Inevitably, the anodic film reproduces the physical nature of the original metal surface. Not only does this mean that any mechanical finish applied previously to the surface will be clearly evident, but even the characteristics of different metal forms will persist. Thus, an extruded element and a sheet element, if colour anodised to the same specification and placed together, will show an apparent colour difference due solely to minor but characteristic differences in surface profile peculiar to the mill process which produced them.

The basic anodising process consists of a suitable chemical pre-cleaning dip, followed by etching in a caustic soda or acid base solution, anodising electrolytically in a sulphuric acid or other solution, and finally sealing to preserve the anodised surface. The anodised surface is in fact an inert, and therefore a protective film of aluminium oxide. The thickness of the aluminium oxide "anodised" coating can be varied by processing time. The depth of anodised coating may be varied according to application.

- 25 Micron is recommended for heavy duty external permanent architectural applications where little deterioration can be tolerated.
- 15 Micron is recommended for the majority of ordinary architectural requirements.
- 10 Micron is suitable for internal applications, and outdoor applications where cleaning is very frequent, for example, caravan trim.

The above figures when specified are minimum figures, and film thickness is checked on a batch basis by electronic means.

Colour finishes are checked for colour match against standards.

Cleaning is desirable if the fine finish of anodized aluminium is to be preserved. Deterioration of the anodic film occurs mainly as a result of grime deposition and attack by contaminated moisture, which in a coastal environment contains chlorides and in an industrial or urban environment contains sulphur compounds. Deposited grime absorbs contaminated moisture like a sponge and holds it against the anodized surface; this permits the attack to proceed thereby damaging the film, which cannot be restored without removal. Regular cleaning is desirable, the frequency depending on accessibility and the severity of the environment. In a rural atmosphere where grime deposition and pollution of the atmosphere are at a minimum, cleaning may not be needed more frequently than every six months in order to remove deposits and restore the appearance.

In industrial and marine environments more frequent cleaning, e.g. monthly, is necessary and the maximum period between cleanings should never be more than three months. Under the worst conditions involving heavy grime deposition and atmospheric pollution by both sulphur compounds and chlorides, even more frequent



McKechnie®
Transforming Aluminium

cleaning is advisable if deterioration of the anodic film is to be prevented.

As a general rule, it could be assumed that with outdoor applications anodized components should be cleaned with the same frequency as windows, using the same materials and techniques.

Where an anodized surface has been neglected, it is sometimes possible to effect restoration by the use of solvents such as kerosene or mineral turpentine in conjunction with a mild household abrasive using a soft cloth. The use of harsh abrasives will damage the film beyond repair.

HANDLING AND STORAGE OF ALUMINIUM

All fabricators and other manufacturers who use aluminium as a raw material face the need to handle and store it. Aluminium can, with very little care, be kept in good condition. It has a high natural resistance to the corrosive conditions normally encountered during transport and storage. The principal conditions against which it is necessary to guard are those likely to cause surface abrasion and water stains.

Every effort is made at McKechnie® Aluminium to pack aluminium extrusions in a way which avoids surface deterioration during transport. The method of packing minimises damage due to flexing and twisting, while paper and spiral plastic wrapping protects ultimately visible surfaces. The method used has proved highly successful in New Zealand for many years.

Nevertheless, it is advisable to inspect all loads as soon as possible after arrival to ensure that damage has not in fact been caused by excessively severe conditions during transport.

When transport marks are present they take the form of scratches or general abrasion, or a condition resembling black cinders embedded in the metal. The latter results from mechanical abrasion followed by oxidation of the abraded areas. The main disadvantage of such a damaged surface is its unsightliness and its effects on finishing operations. It is not important if the damaged face is ultimately not visible. Surface damage does not affect mechanical properties.

Water stains are non-metallic in appearance and while usually whitish, may appear iridescent, depending on the alloy or degree of oxidation. They are caused by entrapped water between adjacent surfaces of closely stacked metal. The purer aluminium alloys are more resistant to water stain, while the condition seems most pronounced on those alloys having a high magnesium content. Water stain is superficial and mechanical properties of the metal are not affected.

Should a shipment of aluminium arrive in a wet condition, it should be immediately thoroughly dried before storing. Drying may be by evaporation in air or by means of dry air currents. Very wet metal should first be wiped down.

When a metal is dried as above within a short period of its becoming wet, no stain will result. If there is a slight stain and the metal is dried, the stain will not develop further.

Aluminium, once dry, should not be stored near such obvious water sources as steam and water pipes and should be kept a reasonable distance from open doors and windows.

Probably the most troublesome cause of water stains is condensation. It may be prevented by avoiding conditions where the temperature of the metal drops below the dew point of the surrounding air, or, conversely, where the moisture content of the air increases enough to take the dew point above the metal temperature. It is thus important that there should not be a sudden fall in temperature or increase in humidity in the place of storage.

Architectural extrusions, as packed by McKechnie® Aluminium, will keep well in their packs for a reasonable time so long as atmospheric conditions do not vary too greatly as described above. However, the packs should not be stored outside since they are not designed to withstand exposure to weather and the variations which occur outside.

When cold metal is brought into a warm shop area it should be left undisturbed, in its pack until the aluminium has been brought up to room temperature. This may take 36 to 48 hours. Opening the pack before the metal



McKechnie®
Transforming Aluminium

has reached room temperature may result in water stain from the condensation which forms on the cold metal.

When the surface of a stain is reasonably smooth and it is quite superficial, appearance can be improved by mechanical or chemical treatments. Scratch brushing with "Scotchbrite" is effective in removing water stains. A suitable chemical dip which does not produce undue etching is an aqueous solution containing 10% sulphuric acid and 3% chromic acid at 82° C.

In storing aluminium it is desirable to avoid contact with other metals which sometimes cause scratches or other marks. The use of shelving or racks faced with dried wood is recommended. Aluminium should also be kept away from caustics, nitrates, phosphates and some acids.

When large quantities of metal are used continuously the oldest stock should be used first. Stock on hand should be checked from time to time and this will help to prevent any serious corrosion.

SOME CORROSION ASPECTS OF ALUMINIUM

All materials of construction have individual characteristics which call for special consideration in design, fabrication and installation. Aluminium is no exception and needs to be installed in proper fashion if best use is to be made of it and maximum service is to be obtained.

Most of the standard aluminium alloys supplied for architectural and structural applications (e.g. McKechnie® Aluminium 6063 and 6060, 6061 etc.) perform very satisfactorily in normal exposed positions. The immunity of aluminium to the atmosphere arises from the protective nature of the oxide film which acts as a barrier to corrosion. For many purposes, decorative as well as protective, the naturally formed oxide film is thickened by anodising and the protective value of the oxide film is thus considerably increased. The comments which follow apply mostly to unanodised aluminium.

In every climate where the atmosphere is at all humid, building and engineering materials undergo some chemical change with the passage of time and are subject to some form of corrosion.

Specific Modes of Attack

Several characteristic modes of attack on aluminium may be distinguished. In the presence of specific substances simple chemical attack may occur. Attack of aluminium by very weak corrosive solutions, such as contaminated rain water, is often insignificant if not prolonged, but it becomes important if circumstances cause the solution to be retained in contact with the metal. Sodden timber lying flat on aluminium, or moist insulation in contact with it are examples of absorbent material acting with a poultice effect. The corrosive solution is held continually in contact with the metal and rapid attack may result.

Crevice effect describes the acceleration of attack when moisture is lodged, for example, in the crevices of riveted or bolted joints in a structure, or when moisture is held by surface tension between the aluminium surface and some object lying against it.

It is possible for a building material when wet to liberate some specific chemical which can corrode aluminium used in the structure. This is corrosion by moisture exudation. Those which may attack aluminium are chiefly from alkaline building materials such as freshly-set plaster, mortars and cements and also acids from certain timbers when wet or unseasoned.

Corrosion of aluminium may be accelerated through contact with another metal in moist or wet conditions and this is known as galvanic corrosion. The two metals, together with water present, constitute a cell, causing a small electric current to flow and leading to corrosion of the less noble metal.

For example, when copper or steel is in contact with aluminium under above conditions aluminium will corrode but when zinc (galvanised surface) is in contact with aluminium then zinc will corrode.

Stainless steel and aluminium form an exception because the combined resistance of the two protective films impedes the current flow, thus reducing galvanic action.



McKechnie®
Transforming Aluminium

General Means of Preventing Corrosion

The methods of preventing the corrosive effects just described really amount to the avoidance of the conditions which lead to them. Often it is impossible to avoid all the conditions but at least one form of preventive action can be taken and this will be adequate.

As moisture or liquid is essential to corrosion, the exclusion of moisture prevents its occurrence, but the choice of method depends on the nature of the problem. Poultice effect may be tackled by a moisture-proof barrier applied to the aluminium surface. Crevice effect is eliminated if the crevices are filled or stopped. Sometimes the trouble can be countered by designing a component to eliminate moisture traps, or making all contacting components of aluminium and eliminating particular contaminating constituents in, say, water which enters the crevice.

Mastics and putties (linseed oil) are satisfactory in contact with aluminium. Putties give good adhesion to aluminium where sound installation practice is followed, for example, by allowing the metal surface to weather, thus forming a key or, alternatively, by applying an etch primer. The choice of thermal insulating materials for use with aluminium must allow for condensation when the system cools below the dew point. This is because some insulation's contain chloride or alkali which can be leached out and may give rise to corrosion.

For detailed information dealing with the effects of specific materials and chemicals on aluminium the McKechnie® Aluminium Technical Services Department will be pleased to offer advice. There are many forms of assembly where water may be trapped in pockets because of exposure to the weather or condensation. There are several ways in which an accumulation of water may be prevented. For example, drainage holes may be drilled or complete drainage may be assisted by avoiding completely horizontal surfaces. When designing it is important to bear in mind, however, that surface tension tends to keep small holes filled with water until it evaporates. The size of the holes is therefore important.

When joining aluminium by bolts or studs to other metals it may be possible to use non-absorbent inserts of plastic, rubber or neoprene.

Corrosion may be prevented sometimes by adding inhibitors to oppose the reaction of the active corroding agent. Zinc chromate contained in priming paints for aluminium acts as an inhibitor.

Aluminium in Contact With Other Materials

A number of specific materials commonly encountered in building construction are now considered for their corrosion influence on aluminium. These fall into three main categories, iron and steel, non-ferrous metals and non-metals.

(a) Iron and Steel

In contact with structural steel, aluminium suffers attack when a good electrolyte is present, such as sea water or condensed moisture in industrial areas. Several treatments can be applied to the steel such as metal spraying, galvanising, zinc or cadmium plating, painting with zinc-rich paints and so forth.

(b) Non-Ferrous Metals

Reference has already been made to the main non-ferrous metals likely to be encountered in building construction where contact can exist with aluminium.

Contact with copper and its alloys must be avoided and chromium or cadmium plating, for example, is a satisfactory means to prevent this.

Frequently corrosion between aluminium and other metals can be avoided by lacquering, painting or sealing joints so that moisture is excluded.

(c) Non-Metals

Aluminium alloys used for building purposes have good corrosion resistance to concretes, mortars, plasters or fibre cement products. However, when freshly mixed some of these materials release traces of alkaline ducts which may be sufficient to stain aluminium. Splashing of these products onto aluminium, while not sufficiently corrosive to affect strength, does produce an unsightly, stained appearance. Contact with stone or brickwork, particularly when more open-grained and wet, can have a similar effect. Some separation by spacers at the joints should be effected.

In very many applications, particularly indoor, contact between aluminium and timber has been successfully used. However, some more strongly acid timbers in damp environment can cause corrosion. Plastics are virtually without action on aluminium in most conditions of service. Rubber is also without action on aluminium. Adhesives are available for bonding aluminium. Suitable adhesives should not contain in excess of 0.1% chlorides (e.g. NaCl).



McKechnie®
Transforming Aluminium

ALUMINIUM SURFACES – CLEANING IS IMPORTANT

Aluminium has a natural beauty and lustre. Its surface can be treated in various ways to produce different effects, while in the hands of the skilled architect it lends itself to some excellent effects and variations, and contrasts with other materials.

For this reason and because aluminium is so well-proven in service, it is now by far the most common material for exterior work such as windows, doors, curtain walls and shop fronts.

The surface finish of aluminium can be spoiled by improper care and the purpose of this note is to summarize the methods of maintaining aluminium after proper erection on site. Usually this care is no more than periodic cleaning, on a similar basis to which the glass in the windows is cleaned, and it is often merely lack of appreciation of this fact or .which can spoil the effects so proudly established in the first place.

Anodising substantially enhances appearance and renders the surface more resistant to various forms of attack and facilitates cleaning and maintenance.

The Architectural Aluminium Fabricators' Association of New Zealand has published a good guide to Design and Specification and this deals with all aspects of design and use, care and maintenance.

Our aim here, rather briefly, is to highlight the cleaning aspect since it applies to so many users of architectural aluminium products.

Grime which causes deterioration cannot be pre-vented from settling on exposed surfaces. If cleaned reasonably frequently then the mildest methods of washing will produce satisfactory results.

There are many ways to clean aluminium, from using plain water to harsh abrasives. The type of cleaning that should be used is governed by the finish, degree of soiling, and the size, shape and location of the surface to be cleaned.

The mildest method possible should be used, particularly for aluminium which has been anodised. The following cleaning materials and procedures are listed in ascending order of harshness. The mildest treatment should be tried on a small area and if not satisfactory only then should the next be examined.

- Plain water.
- Mild soap or detergent.
- Solvent cleaning, e.g. kerosene, turpentine, white spirit.
- Non-etching chemical cleaner.
- Wax base polish cleaner.
- Abrasive wax.
- Abrasive cleaner.

After applying the cleaner, aluminium should be washed down thoroughly and dried with a clean cloth to prevent streakiness.

There should be no concentration of the cleaner at the bottom edges of the aluminium.

If using proprietary cleaners the maker's recommendation should be obtained and followed carefully.

If abrasives are used then the appearance of the aluminium finish may be altered. If there is a grain in the finish then cleaning should always be with the grain.

Once the condition of the surface requires the use of abrasive or etching materials it is advisable to consult either cleaning specialists, or the McKechnie® Aluminium Technical Service Department will be pleased to offer advice.

When all other methods fail it may be necessary to resort to heavy duty cleaning. This involves the use of cleaners containing strong etching chemicals or coarse abrasives.

Regular cleaning of the surface with the correct materials will ensure an everlasting product.



McKechnie®
Transforming Aluminium

COMPATIBILITY WITH COMMON BUILDING MATERIALS

The use of aluminium in building construction involves its close association with many other materials. Aluminium is compatible with most, but there are a few which require some special attention. The table below summarises the more common building materials with which aluminium may be associated and the treatment required to ensure lasting success.

MATERIAL	COMPATIBILITY	TREATMENT
Iron and Steel	In exposed applications there will be attack	Coat steel surface with a resin-based aluminium or zinc pigmented paint.
Galvanised Steel	Satisfactory provided the atmospheric conditions are not likely to break down the zinc coating	No protection required. Preferable to use soft aluminium for flashing.
Lead	Very little action	Must be plated with nickel and/or chromium.
Copper & Brass	Severe corrosive action	Run-off water should always drain from aluminium - never from copper to aluminium.
Cadmium Plate	Satisfactory provided the plating is of high quality.	
Nickel/Chrome Plate	Satisfactory provided the plating is unbroken.	
Stainless Steel	Satisfactory	
Damp or Unseasoned timber	Not satisfactory	Timber must be primed with zinc chromate undercoat and sealed with a suitable protective paint
Plaster, Terrazzo, Cement	Until set severe corrosive action occurs	Exposed faces of aluminium must be protected.

TEMPER DESIGNATIONS

DESIGNATION	DESCRIPTION
F	As extruded only.
T1	Solution treated and quenched from an elevated temperature as part of the extrusion process and naturally aged.
T4	Solution treated and quenched from an elevated temperature as part of the extrusion process and naturally aged. Applies to products that are not cold worked, or where the effect of cold work is not recognised in applicable standards.
T5	Solution treated, cooled from an elevated temperature as part of the extrusion process and then artificially aged to substantially improve mechanical properties.
T52	A temper satisfying T5 requirements with improved formability
T6	Solution treated, cooled from an elevated temperature as part of the extrusion process and then artificially aged to give maximum mechanical properties.

Note: A second or third digit may be added to designated tempers. This indicates a variation in the production process has been applied to alter the final characteristic of the product, i.e. to achieve improved ductility etc.



McKechnie®
Transforming Aluminium

Extrusion Data

SURFACE FINISH DESIGNATIONS

FINISH	DEFINITIONS
Structural	This is not controlled for uniformity of appearance. Rod, bar and solid shapes are supplied in this finish unless otherwise specified.
Architectural	A controlled finish of substantially uniform appearance, buffing will not produce a finish free of die-lines unless a preliminary grinding or sanding operation is employed. This finish is normally satisfactory for exposed surfaces of any architectural application, other than feature components and is applied to visible surfaces of each shape nominated by the purchaser.

MAINTENANCE & CARE OF POWDERCOATED PRODUCTS

Powder coating is probably one of the most durable colour coatings available for a wide range of products and uses. However, to obtain the very best results in overall finish and in longevity, correct product handling and maintenance is essential.

In many cases, powder coated extrusions require the use of sealants as part of the fabrication process. Many sealant manufacturers recommend the cleaning of powder coated surfaces prior to the application of sealants. Sometimes a primer may be required. The selection of the solvent used is critical. Some can cause irreparable harm to the Powder coated surface. Advanced colour and gloss loss can appear in a short space of time if a harsh solvent is used. Suitable cleaning products include: White Spirits, Methylated Spirits, Turpentine, Ethyl Alcohol, Isopropanol. These solvents are mild and readily available.

Do not use Acetates, Dulon Thinners, Methyl Ethyl Ketone (MEK) or Petrol products. Highly acidic, alkali or alcohol based cleaners are not recommended either.

Ensure regular maintenance

As with many coated surfaces, regular maintenance will extend the life of the surface and retain its appearance. Cleaning should be conducted routinely at three monthly intervals and six months should be considered the longest interval. In industrial or marine locations particular attention should be paid to regular maintenance due to the harsher atmosphere.

- Clean with a dilute solution of mild liquid detergent. Avoid excessively hot solutions.
- Use a soft bristle brush. Do not use abrasive tools on the coating. After cleaning, rinse thoroughly with fresh water. Ensure that areas that are not normally exposed to rain are washed and rinsed also.
- Do not use strong solvent type cleaners. Where the use of solvent is required, such as cleaning paint spills, use nothing other than Methylated Spirits. Ensure that the contact time is as short as possible, and rinse the solvent cleaner thoroughly from the surface with copious amounts of drinking quality water.
- It is strongly recommended that a small test area be checked first, to ensure that no damage will occur to the whole area.

REFURBISHING POWDER COATED PRODUCTS

All surfaces eventually degrade on prolonged exposure to the elements. Change of colour, loss of gloss and some chalking may eventuate after time. A number of restoration techniques are possible.

These will depend on the circumstances, the life expectancy of the refurbishment and the approach may vary between domestic and commercial applications.

Domestic Refurbishment:

Polish with a high quality automotive cream polish in accordance with the manufacturers instructions. This will both clean and protect the surface. Avoid polishes which also contain cutting compounds, unless the surface is extremely weathered.

For badly scratched surfaces use a dab stick or aerosol can with colour matched paint. These are available from your local aluminium window and door fabricator.

Alloy 6060



McKechnie®
Transforming Aluminium

PROPERTIES AND SPECIFICATIONS:

CHEMICAL COMPOSITION % (1)											
Alloy	Al	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Others	
										Each	Total
6060	Rem.	0.3 -0.6	0.10 -0.30	0.10	0.10	0.35 -0.6	0.05	0.15	0.10	0.05	0.15

Temper	Size or Thickness (3)		Mechanical Property Compliance or Rating (2)			Typical Mechanical Properties, Characteristics and Applications				
			Tensile Strength (Mpa)		Elong .% (min) (5)	Tensile Strength (MPa)		Elong .%	Shear (MPa)	Hardness (Hv)
	Over mm	Up to mm	UTS (Min)	Yield (Min) (4)		UTS	Yield			
T1		12	115	60	12	125	65	20	...	50
	12	25	110	55	10	120	60	20	...	50
T4		150	130	70	12	140	75	20	...	50
T5		12	150	110	8	165	120	12	110	65
	12	25	145	105	6	155	115	10	110	60
T52		12	150	110	8	160	120	12	110	60
T526		12	190	150	8	200	165	10	130	68

Modulus of Elasticity (Gpa):

[All Tempers]

- Tension ~ 69
- Compression ~ 69
- Shear ~ 26

Resistance to Corrosion: (6)

- General A Can be used in industrial and seacoast atmospheres without protection.
- Stress Corrosion Cracking A

Workability (Cold) C Average

Machinability C Average

Weld ability

- Gas A Generally weldable by all commercial procedures and methods.
- Arc A
- Resistance, Spot & Seam A

Braze ability A Generally weldable by all commercial procedures and methods.

Typical Applications Light structural & architectural extrusions such as glazing bars and window frames, general purpose extrusions. Good surface finish, anodises well.

Notes:

- 1) Chemical compositions are referenced in AS/NZS 1866. Single figures are maximums.
- 2) Mechanical properties and ratings for T1, T5 & T52 tempers are specified in AS/NZS 1866. T4, T526 & T6 (T6 is based on BS N 755) tempers are not listed in AS/NZS 1866.
- 3) Thickness is defined as the diameter of solid rod or the wall thickness or the equivalent major solid cross section.
- 4) Yield is based on 0.2% Proof Stress.
- 5) Elongation is based on 50mm test parameter.
- 6) Ratings A through E are relative ratings in order of merit for the hardest temper (A = Excellent E = Poor).

Consult McKechnie® Aluminium Technical Services Department if further information is required.



McKechnie®
Transforming Aluminium

Alloy 6063

PROPERTIES AND SPECIFICATIONS:

CHEMICAL COMPOSITION % (1)											
Alloy	Al	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Others	
										Each	Total
6063	Rem.	0.2 -0.6	0.35	0.10	0.10	0.45 -0.9	0.10	0.10	0.10	0.05	0.15

Temper	Size or Thickness (3)		Mechanical Property Compliance or Rating (2)			Typical Mechanical Properties, Characteristics and Applications				
			Tensile Strength (Mpa)		(5) Elong .% (min)	Tensile Strength (MPa)		Elong .%	Shear (MPa)	Hardness (Hv)
	Over mm	Up to mm	UTS (Min)	Yield (Min) (4)		UTS	Yield			
F		200	100	...	20	...	45
T1		12	115	60	12	125	65	20	...	50
		12	25	110	55	10	120	60	20	50
T4		150	130	70	12	140	75	20	...	50
		12	150	110	8	165	120	12	117	65
T5		12	145	105	6	155	115	10	117	65
		12	205	110	8	160	120	12	110	62
T52		12	150-205	110	8	160	120	12	110	62
		25	205	170	8	220	185	10	152	75
T6		25	185	160	10	200	175	12	152	75
		150	185	160	10	200	175	12	152	75

Modulus of Elasticity (Gpa): [All Tempers]		
• Tension	68.3	
• Compression	69.7	
• Shear	25.8	
Resistance to Corrosion: (6)		
• General	A	Can be used in industrial and seacoast atmospheres without protection.
• Stress Corrosion Cracking	A	
Workability (Cold) C Average		
Machinability C Average		
Weldability		
• Gas	A	Generally weldable by all commercial procedures and methods.
• Arc	A	
• Resistance, Spot & Seam	A	
Brazeability A Generally weldable by all commercial procedures and methods.		
Typical Applications Light structural & architectural extrusions such as glazing bars and window frames, general purpose extrusions. Good surface finish, anodises well.		

Notes:

- 1) Chemical compositions are referenced in AS/NZS 1866. Single figures are maximums.
- 2) Mechanical properties and ratings for T1, T4, T5 & T6 tempers are specified in AS/NZS 1866. T52 temper is not listed in AS/NZS 1866. Temper F is included for information only.
- 3) Thickness is defined as the diameter of solid rod or the wall thickness or the equivalent major solid cross section.
- 4) Yield is based on 0.2% Proof Stress.
- 5) Elongation is based on 50mm test parameter.
- 6) Ratings A through E are relative ratings in order of merit for the hardest temper (A = Excellent E = Poor).

Consult McKechnie® Aluminium Technical Services Department if further information is required.

Alloy 6061



McKechnie®
Transforming Aluminium

PROPERTIES AND SPECIFICATIONS:

CHEMICAL COMPOSITION % (1)											
Alloy	Al	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Others	
										Each	Total
6061	Rem.	0.4 -0.8	0.7	0.15 -0.4	0.15	0.8 -1.2	0.04 -0.35	0.25	0.15	0.05	0.15

Temper	Size or Thickness (3)		Mechanical Property Compliance or Rating (2)			Typical Mechanical Properties, Characteristics and Applications				
			Tensile Strength (Mpa)		(5) Elong .% (min)	Tensile Strength (MPa)		Elong .%	Shear (MPa)	Hardness (Hv)
	Over mm	Up to mm	UTS (Min)	Yield (Min) (4)		UTS	Yield			
T1		12.5	180	95	16	195	105	20	...	60
T4	All		180	110	14	195	120	20	165	60
T6	All		260	240	8	300	280	12	207	100
T6511	All		260	240	10	300	280	12	207	100

Modulus of Elasticity (Gpa): [All Tempers]	
• Tension	68.9
• Compression	69.7
• Shear	~ 26
Resistance to Corrosion: (6)	
• General	B Good corrosion resistance for high strength applications.
• Stress Corrosion Cracking	A
Workability (Cold)	C Average
Machinability	C Average
Weldability	
• Gas	A Generally weldable by all commercial procedures and methods.
• Arc	A
• Resistance, Spot & Seam	A
Brazeability	A Generally weldable by all commercial procedures and methods.
Typical Applications	Structural applications where corrosion resistance is needed, i.e. marine and transport use.

Notes:

- 1) Chemical compositions are referenced in AS/NZS 1866. Single figures are maximums.
- 2) Mechanical properties and ratings for T1, T4 & T6 tempers are specified in AS/NZS 1866.
- 3) T6511 is a controlled stretch in-house temper, also meeting T6 properties.
- 4) Thickness is defined as the diameter of solid rod or the wall thickness or the equivalent major solid cross section.
- 4) Yield is based on 0.2% Proof Stress.
- 5) Elongation is based on 50mm test parameter.
- 6) Ratings A through E are relative ratings in order of merit for the hardest temper (A = Excellent E = Poor).

Consult McKechnie® Aluminium Technical Services Department if further information is required.



McKechnie®
Transforming Aluminium

Alloy 6106

PROPERTIES AND SPECIFICATIONS:

CHEMICAL COMPOSITION % (1)											
Alloy	Al	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Others	
										Each	Total
6106	Rem.	0.3 -0.6	0.35	0.25	0.05 -0.20	0.40 -0.8	0.20	0.10	-	0.05	0.15

Temper	Size or Thickness (3)		Mechanical Property Compliance or Rating (2)			Typical Mechanical Properties, Characteristics and Applications				
			Tensile Strength (Mpa)		(5) Elong .% (min)	Tensile Strength (MPa)		Elong .%	Shear (MPa)	Hardness (Hv)
	Over mm	Up to mm	UTS (Min)	Yield (Min) (4)		UTS	Yield			
T4		150	130	70	12	140	75	20	...	55
T6		10	235	210	8	255	255	10	180	90
	10	25	205	170	8	225	185	10	180	85
	25	150	185	160	10	200	175	12	180	85

Modulus of Elasticity (Gpa): [All Tempers]		
• Tension	68.5	
• Compression	69.7	
• Shear	~ 26	
Resistance to Corrosion: (6)		
• General	A	Can be used in industrial and seacoast atmospheres without protection.
• Stress Corrosion Cracking	A	
Workability (Cold)	C	Average
Machinability	C	Average
Weldability		
• Gas	A	Generally weldable by all commercial procedures and methods.
• Arc	A	
• Resistance, Spot & Seam	A	
Brazeability	A	Generally weldable by all commercial procedures and methods.
Typical Applications		General purpose extrusions, light structural applications.

Notes:

- 1) Chemical compositions are referenced in AS/NZS 1866. Single figures are maximums.
- 2) Mechanical properties and ratings:
T4 & T6 tempers specified in AS/NZS 1866: Aluminium Alloys - Extruded rod, bar, solid & hollow shapes.
- 3) Thickness is defined as the diameter of solid rod or the wall thickness or the equivalent major solid cross section.
- 4) Yield is based on 0.2% Proof Stress.
- 5) Elongation is based on 50mm test parameter.
- 6) Ratings A through E are relative ratings in order of merit for the hardest temper (A = Excellent E = Poor).

Consult McKechnie® Aluminium Technical Services Department if further information is required.

Alloy 6005A



McKechnie®
Transforming Aluminium

PROPERTIES AND SPECIFICATIONS:

CHEMICAL COMPOSITION % (1)												
Alloy	Al	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Others Each	Total	Other Specific Elements
6005A	Rem.	0.50 -0.90	0.35	0.30	0.50	0.40 -0.70	0.30	0.20	0.10	0.05	0.15	Mn + Cr 0.12 - 0.50

Temper	Size or Thickness (3)		Mechanical Property Compliance or Rating (2)			Typical Mechanical Properties, Characteristics and Applications				
			Tensile Strength (Mpa)		(5) Elong .% (min)	Tensile Strength (MPa)		Elong .%	Shear (MPa)	Hardness (Hv)
	Over mm	Up to mm	UTS (Min)	Yield (Min) (4)		UTS	Yield			
T4	All		180	110	14	200	150	18	...	60
T5	All		260	240	8	280	260	12	205	100

Modulus of Elasticity (Gpa): [All Tempers]		
• Tension		~ 69
• Compression		~ 69
• Shear		~ 26
Resistance to Corrosion:		(6)
• General	A	Can be used in industrial and seacoast atmospheres without protection.
• Stress Corrosion Cracking	A	
Workability (Cold)		C Average
Machinability		C Average
Weldability		
• Gas	A	Generally weldable by all commercial procedures and methods.
• Arc	A	
• Resistance, Spot & Seam	A	
Brazeability		A Generally weldable by all commercial procedures and methods.
Typical Applications		Structural applications, transport and marine, extrusions for portable ladders. Used for applications requiring greater strength than 6063 and 6106 alloys.

Notes:

- 1) Chemical compositions are referenced in AS/NZS 1866. Single figures are maximums.
- 2) Mechanical properties and ratings for T5 tempers are specified in AS/NZS 1866. (Note McKechnie® internal designation T6 temper).
- 3) Thickness is defined as the diameter of solid rod or the wall thickness or the equivalent major solid cross section.
- 4) Yield is based on 0.2% Proof Stress.
- 5) Elongation is based on 50mm test parameter.
- 6) Ratings A through E are relative ratings in order of merit for the hardest temper (A = Excellent E = Poor).

Consult McKechnie® Aluminium Technical Services Department if further information is required.



McKechnie®
Transforming Aluminium

Important Information on Order & Pricing Requirements

ORDER REQUIREMENTS

- # - A hash symbol alongside a section number indicates sections that are subject to specific MOQ's (minimum order quantities) are POA (price on application) and require different supply tolerances. For these sections, please contact your key account manager.
- * - A star symbol alongside a section number indicates that some close or special tolerances apply.
- + - A plus symbol along side a section number indicates that the section is available to order in 6.0m length only.

PRICE EXTRAS (Added to base metal rate)

- Alloy extras may be applicable for alloys other than 6060.
- Quantity extras may be applicable for orders of less than 250kg.
- Length extras may be applicable for lengths less than 3m or over 6.5m.
- Packaging cost extras may be applicable where packs smaller than our minimum pack size of 150kgs are requested.
- Size and shape extras may be applicable for shapes that are large and / or complex.

Note: This catalogue is revised regularly. The list of sections it contains do change and availability of any given section can only be confirmed at the time of order placement and order confirmation.




MANUFACTURING TOLERANCES AS/NZS 1866:1997 CLASSIFICATION OF HOLLOW EXTRUDED SHAPES

Hollow extruded shapes are classified as follows:

- (a) Class A
A hollow extruded shape having a single void with no internal or external protrusions, and which is greater than 15 mm in diameter or 177 mm^2 in area. The void may be round, square or rectangular, provided that the width/depth ratio is less than 5:1. It has uniform wall thickness except that a non-uniform wall is allowed at corners having internal or external radii up to 7.5 mm.
- (b) Class B
A single void hollow extruded shape other than a Class A shape, or a solid shape incorporating a single semi-hollow area classified as a hollow.
- (c) Class C
A hollow extruded shape having two or more fully enclosed voids.
- (d) Class D
Any hollow shape that incorporates a semi-hollow area, or any solid shape that incorporates multiple semi-hollow areas that are classified as hollows
- (e) Yacht mast extrusion
A hollow or solid extruded shape, which is basically round or elliptical in section and which incorporates a sail track or has provision for a sail track, used in the manufacture of masts and booms for yachts.

DIAMETER, WIDTH AND DEPTH TOLERANCES FOR CLASS A HOLLOW SHAPES



Specified dimension		TOLERANCE, PLUS OR MINUS	
		Round tube	Square and rectangular hollows
		Allowable deviation of diameter from specified diameter	Allowable deviation of width or depth from specified width or depth. (see Note)
Column 1		Column 2	Column 3
	≤ 25	0.5	0.5
>25	≤ 50	0.7	0.7
>50	≤ 100	0.8	0.9
>100	≤ 125	1.3	1.2
>125	≤ 150	1.3	1.4
>150	≤ 180	1.9	1.7
>180	≤ 200	1.9	1.9
>200	≤ 220	2.6	2.2
>220	≤ 250	2.6	2.4
>250	≤ 280	3.2	2.7
>280	≤ 330	3.8	2.9

Table 1

Note: For a rectangular hollow as shown in the diagram, the tolerances are determined as follows:

- (a) The tolerance for the width, A, is the value in Column 3 for a dimension equal to the depth B.
- (b) The tolerance for the depth, B, is the value in Column 3 for a dimension equal to the width A.



Tolerances

WALL THICKNESS TOLERANCES FOR CLASS A HOLLOW SHAPES

Specified wall thickness (see note)		Allowable deviation from specified dimension for round tube, square and rectangular hollows, plus or minus	
		Circumscribing circle diameter (CCD) ≤125	Circumscribing circle diameter (CCD) >125
>1.0	≤1.5	0.2	0.25
>1.5	≤2.5	0.25	0.25
>2.5	≤3	0.30	0.30
>3.0	≤4	0.35	0.35
>4.0	≤5	0.40	0.45
>5.0	≤6	0.50	0.55
>6.0	≤7	0.60	0.65
>7.0	≤8	0.65	0.75
>8.0	≤9	0.70	0.85
>9.0	≤10	0.70	0.95
>10.0	≤11	0.75	1.05
>11.0	≤12	0.80	1.15
>12.0	≤13	0.85	1.25
>13.0	≤14	0.90	1.35
>14.0	≤15	0.95	1.45
>15.0	≤20	1.00	1.55
>20.0	≤25	1.25	1.65
>25.0	≤40	1.50	1.75

Table 2

Note: When the dimensions specified are outside and inside, rather than wall thickness itself, the allowable deviation of the wall thickness applies to the mean wall thickness. The mean wall thickness is the average of the maximum and minimum measured wall thickness, when measured at the ends of the cut length.




LENGTH TOLERANCES FOR EXTRUDED PRODUCTS

Circumscribing circle diameter (CCD) mm		Allowable deviation from specified length mm				Allowable deviation from specified length percent			
		Straight length m				Coiled length m			
		≤4	>4 ≤10	>10 ≤15	>15	≤30	>30 ≤75	>75 ≤150	>150
≤30		3	6	10	25	5	±10	±15	±20
>30	≤75	3	6	10	25	-	-	-	-
>75	≤200	5	8	11	25	-	-	-	-
>200		6	10	13	25	-	-	-	-

Table 3

TWIST TOLERANCES FOR EXTRUDED PRODUCTS

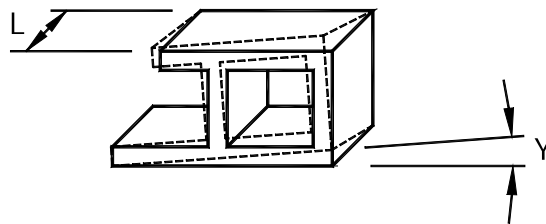

Circumscribing circle diameter (CCD) mm	TOLERANCE			
	Alloy and Temper 6063-T5 & T52 6060-T5 & T52		All other alloys and tempers	
	Maximum allowable angular deviation, Y, degrees (see diagram)			
	In any 300 mm length	In total length of L metres	In any 300 mm length	In total length of L metres
≤40	0.50	0.8 L (3° max.)	0.50	3.3 L (3° max.)
>40 ≤75	0.50	0.8 L (3° max.)	0.50	1.7 L (3° max.)
>75 ≤175	0.25	0.8 L (3° max.)	0.25	0.8 L (3° max.)
>175 ≤250	0.50	1.7 L (5° max.)	0.50	1.7 L (5° max.)
>250	1.00	1.7 L (5° max.)	1.00	3.3 L (7° max.)


Table 4



McKechnie®
Transforming Aluminium

Tolerances

CROSS SECTIONAL TOLERANCES FOR METAL DIMENSIONS OF ROD, BAR, SOLID SHAPES, AND CLASS B, C AND D HOLLOW SHAPES

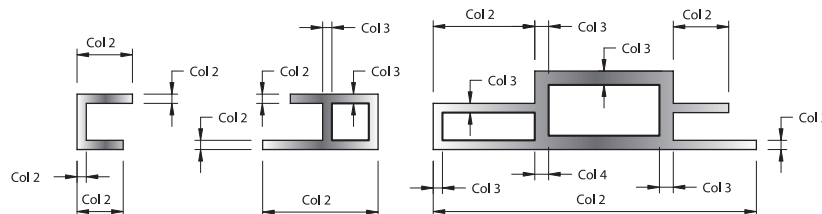


millimetres

Specified dimension		ALLOWABLE DEVIATION FROM SPECIFIED DIMENSION, PLUS OR MINUS					
		All metal dimensions except those covered by Column 3 and Column 4		All wall thicknesses completely enclosing space 70mm ² and over, except those covered by Column 4		Wall thickness between adjacent voids enclosing space 70mm ² and over	
Column 1		Column 2		Column 3		Column 4	
		Circumscribing circle diameter (CCD)		Circumscribing circle diameter (CCD)		Circumscribing circle diameter (CCD)	
		≤250	>250	≤250	>250	≤250	>250
>1.0	≤1.5	0.15	0.35	0.15	-	0.30	-
>1.5	≤3.0	0.15	0.35	0.25	0.40	0.30	0.50
>3.0	≤4.0	0.20	0.40	0.40	0.50	0.50	0.70
>4.0	≤5.0	0.20	0.40	0.50	0.70	0.60	0.80
>5.0	≤6.0	0.20	0.40	0.60	0.80	0.70	1.00
>6.0	≤7.0	0.20	0.40	0.70	1.00	0.80	1.20
>7.0	≤8.0	0.20	0.40	0.80	1.20	1.00	1.40
>8.0	≤9.0	0.20	0.40	0.90	1.30	1.10	1.60
>9.0	≤10	0.20	0.40	1.00	1.50	1.20	1.70
>10	≤11	0.20	0.40	1.10	1.60	1.30	1.90
>11	≤12	0.20	0.40	1.20	1.70	1.50	2.10
>12	≤13	0.25	0.45	1.30	1.80	1.60	2.30
>13	≤14	0.25	0.45	1.40	2.00	1.70	2.50
>14	≤15	0.25	0.45	1.50	2.20	1.80	2.60
>15	≤16	0.25	0.45	1.60	2.30	2.00	2.80
>16	≤20	0.25	0.45	1.60	2.30	2.00	2.80
>20	≤25	0.25	0.45	1.60	2.30	2.00	2.80
>25	≤40	0.30	0.50	1.60	2.30	2.00	2.80
>40	≤50	0.40	0.60	BY NEGOTIATION ONLY			
>50	≤100	0.60	0.90				
>100	≤150	0.90	1.10				
>150	≤200	1.10	1.40				
>200	≤250	1.40	1.70				
>250	≤300	*	1.90				
>300	≤350	*	2.20				
>350	≤400	*	2.40				

Table 5

* Tolerances subject to negotiation.

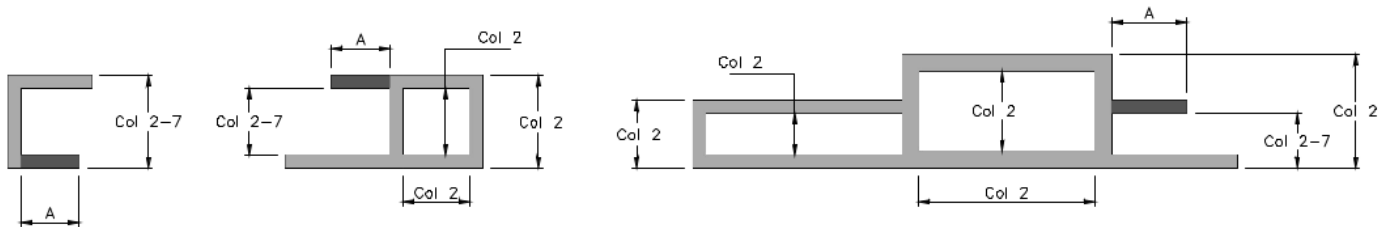
CROSS SECTIONAL TOLERANCES FOR SPACE DIMENSIONS OF SOLID SHAPES, AND CLASS B, C AND D HOLLOW SHAPES


millimetres

Specified Dimension		ALLOWABLE DEVIATION FROM SPECIFIED DIMENSION, PLUS OR MINUS					
		Dimension, A , measured from base of leg (see Note)					
Column 1 CCD ≤250		Column 2 >5 ≤15	Column 3 >15 ≤30	Column 4 >30 ≤60	Column 5 >60 ≤100	Column 6 >100 ≤150	Column 7 >150 ≤200
	≤3	0.25	0.30	-	-	-	-
>3	≤6	0.30	0.35	0.40	-	-	-
>6	≤12	0.35	0.40	0.45	0.50	-	-
>12	≤20	0.40	0.45	0.50	0.55	-	-
>20	≤25	0.45	0.50	0.55	0.70	0.80	-
>25	≤40	0.55	0.60	0.70	0.80	0.90	-
>40	≤50	0.60	0.70	0.80	0.90	1.10	1.30
>50	≤100	0.90	1.00	1.20	1.50	1.80	2.00
>100	≤150	1.10	1.30	1.70	2.00	2.40	2.80
>150	≤200	1.40	1.60	2.10	2.50	3.00	3.50
>200	≤250	1.70	1.90	2.60	3.00	3.70	4.30

Table 6

Note: When checking the tolerance for space across a void, the tolerances are determined as follows:

(A) The tolerance for the width, is the value in Column 2 for a dimension equal to the depth


(B) The tolerance for the depth, is the value in Column 2 for a dimension equal to the width



McKechnie®
Transforming Aluminium

Tolerances


STRAIGHTNESS TOLERANCES FOR ALL EXTRUDED PRODUCTS

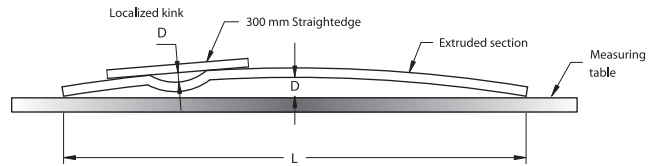

Alloy and Temper	ALLOWABLE DEVIATION FROM STRAIGHTNESS, D, MM	
	In any length ≤ 300 mm	In total length of L, m
6106-T5 & T6	0.2	0.7 L
6063-T5 & T52	0.2	0.7 L
6060-T5 & T52	0.2	0.7 L
All other alloys and tempers	0.6	2.0 L

Table 7

FLATNESS (FLAT SURFACE) TOLERANCES FOR ALL EXTRUDED PRODUCTS



millimetres

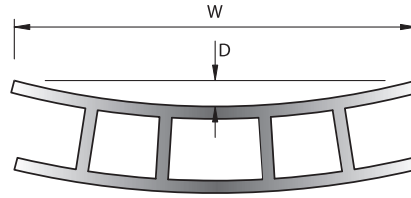
Surface width, W	ALLOWABLE DEVIATION FROM FLAT, D,	
	Solid shapes	Hollow shapes L, m
≤ 25	0.1	0.15
> 25	0.004W	0.006W
In any 25 mm width	0.1	0.15

Table 8


ANGULARITY TOLERANCES FOR ALL EXTRUDED PRODUCTS

Allowable deviation from specified angle
± 2 degrees

Table 9


TOTAL TRANSVERSE FLATNESS TOLERANCES FOR CLASS C HOLLOW SHAPES



Total width, W	Allowable deviation from flat, D
≤ 100	$0.004 W$
> 100 ≤ 150	$0.005 W$
> 250	$0.006 W$

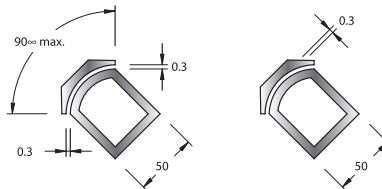Table 10
CONTOUR (CURVED SURFACE) TOLERANCES FOR SOLID SHAPES AND CLASS B, C AND D HOLLOW SHAPES


ALLOWABLE DEVIATION FROM SPECIFIED CONTOUR
0.15 mm per 25 mm of chord length (Minimum tolerance = 0.15 mm)

Table 15

CORNER AND FILLET RADII TOLERANCES FOR ALL EXTRUDED PRODUCTS



Specified radius mm	Allowable deviation from specified radius
≤5	± 0.4 mm
>5	± 10%


Table 16

TOLERANCE FOR SQUARENESS OF CUT ENDS FOR ALL EXTRUDED PRODUCTS

Allowable deviation from square
1 degree

Table 17

YACHT MASTS

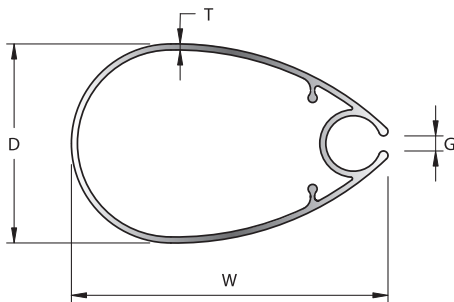

LEGEND:

T = Wall thickness

D = Depth

W = Width

G = Gap dimension

Refer to McKechnie® Aluminium for tolerances

CROSS SECTION OF A YACHT MAST EXTRUSION



Geometric Shapes



McKechnie®
Transforming Aluminium





McKechnie®
Transforming Aluminium

Equal Angles Group 1.1.1





SECTION NO	A	T	R	MASS kg/m	OUTSIDE PERM
36795	10.00	1.60		0.080	39.57
9322	12.00	1.50		0.091	48.00
6421	12.00	1.65		0.100	48.00
5968	12.00	3.00		0.170	48.00
33389	12.00	1.60		0.097	48.00
0278	12.70	1.57		0.101	50.80
5003	12.70	3.00		0.182	50.80
5766	15.00	1.50		0.115	60.00
G466	16.00	1.60		0.132	64.00
5969	16.00	3.00		0.235	64.00
9324	20.00	1.50		0.156	80.00
5512	20.00	1.60		0.167	80.00
5972	20.00	3.00		0.300	80.00
9327	25.00	1.50		0.196	100.00
5510	25.00	1.60		0.210	100.00
5973	25.00	3.00		0.381	100.00
5005	25.40	3.00		0.389	101.60
5011	25.40	4.50		0.565	100.60
5014	25.40	6.00		0.703	101.60
5006	31.75	3.00		0.492	127.00
0572	31.75	4.75		0.753	127.00
K014	32.00	1.50		0.254	128.00

SECTION NO	A	T	R	MASS kg/m	OUTSIDE PERM
33388	32.00	3.00		0.496	128.00
33401	38.00	2.30		0.459	152.00
0657	38.10	3.18		0.627	152.40
5012	38.10	4.50		0.871	152.40
9331	40.00	1.50		0.318	160.00
5975	40.00	1.60		0.333	160.00
5976	40.00	3.00		0.624	160.00
K129	40.00	4.00		0.824	160.00
9530	40.00	6.00		1.199	160.00
9333	50.00	1.50		0.399	200.00
6484	50.00	1.60		0.425	200.00
5977	50.00	3.00		0.786	200.00
J792	50.00	4.00		1.040	200.00
8518	50.00	6.00		1.523	200.00
33041	50.00	4.50		1.165	199.57
33318	50.00	5.80		1.481	200.00
38585	50.80	3.18	6.35	0.861	196.80
5013	50.80	4.50		1.180	203.20
1338	50.80	4.75		1.242	203.20
2303	50.80	6.35		1.633	203.20
0285	50.80	6.35	6.10	1.661	200.58
9743	60.00	3.00		0.948	240.00



McKechnie®
Transforming Aluminium

Equal Angles Group 1.1.2




SECTION NO	A	T	R	MASS kg/m	OUTSIDE PERM
9780	60.00	6.00		1.847	239.50
0692	63.50	6.35	6.86	2.098	251.20
30543	75.00	6.00		2.341	300.00
33387	75.00	3.00		1.195	300.00
5009	76.20	3.00		1.210	304.80
5645	76.20	4.50		1.797	304.80
5018	76.20	6.00		2.372	304.80
5424	76.20	9.00		3.485	304.80
9744	80.00	6.00		2.495	320.00
38601	80.00	3.00		1.276	319.23
N736	80.00	10.00	6.00	4.086	317.42
30982	80.00	10.00	6.00	4.086	317.42
1026	88.90	9.53	8.38	4.371	352.00
38602	100.00	3.00		1.601	399.23
31708	100.00	6.00		3.154	400.00
34044	100.00	6.00		3.154	400.00
1025	101.60	6.35	9.14	3.423	402.50
1908#	101.60	9.53	9.14	5.055	402.48
X788#	110.00	10.00	6.00	5.694	432.27
35378	150.00	10.00	6.00	7.877	595.28

These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Unequal Angles Group 1.1.3


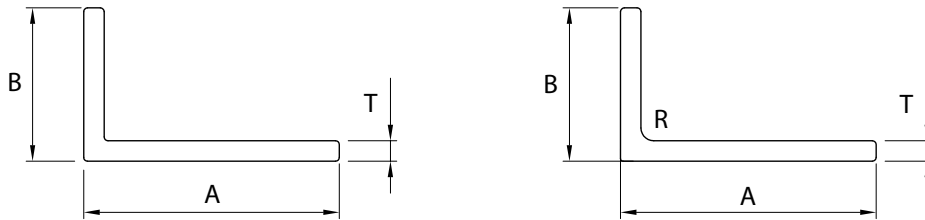


SECTION NO	A	B	T	R	MASS kg/m	OUTSIDE PERM
9323	20.00	12.00	1.50		0.124	64.00
5514	20.00	12.00	1.60		0.132	64.00
5970	20.00	12.00	3.00		0.235	64.00
9325	25.00	12.00	1.50		0.144	74.00
5513	25.00	12.00	1.60		0.154	73.00
5971	25.00	12.00	3.00		0.275	74.00
9326	25.00	20.00	1.50		0.176	90.00
5511	25.00	20.00	1.60		0.188	90.00
J074	25.00	20.00	3.00		0.341	90.00
1181	25.40	19.05	6.35		0.653	88.90
30999	30.00	15.00	3.00		0.341	90.00
5931	30.00	25.00	2.00	1.00	0.286	109.57
0460	32.00	19.00	3.00		0.388	102.00
9328	32.00	20.00	1.50		0.205	104.00
5727	32.00	20.00	1.60		0.218	104.00
35591	32.00	25.00	2.50		0.369	114.00
5974	32.00	25.00	3.00		0.437	114.00
6670	38.00	19.00	1.60		0.239	114.00
K617	38.00	25.00	2.30		0.378	126.00



McKechnie®
Transforming Aluminium

Unequal Angles Group 1.1.4

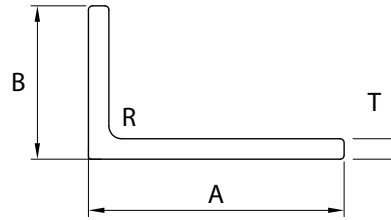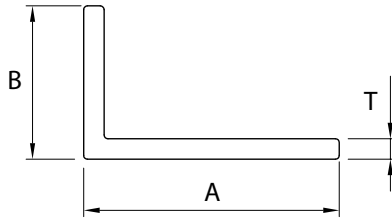


SECTION NO	A	B	T	R	MASS kg/m	OUTSIDE PERM
7084	40.00	12.00	1.50		0.205	104.00
9745	40.00	12.00	3.00		0.397	104.00
9329	40.00	20.00	1.50		0.237	120.00
8459	40.00	20.00	1.60		0.252	120.00
6076	40.00	20.00	3.00		0.462	120.00
9330	40.00	25.00	1.50		0.257	130.00
5509	40.00	25.00	1.60		0.275	130.00
8517	40.00	25.00	3.00		0.502	130.00
6854	44.00	25.00	1.60		0.291	138.00
J426	50.00	12.00	3.00		0.480	124.00
J456	50.00	20.00	1.50		0.278	140.00
31043	50.00	20.00	3.00		0.545	140.00
9332	50.00	25.00	1.50		0.298	150.00
5903	50.00	25.00	1.60		0.317	150.00
5323	50.00	25.00	3.00		0.585	150.00
N732	50.00	40.00	3.00		0.707	180.00
0734	50.80	38.10	4.78		1.086	177.80
9753	60.00	25.00	3.00		0.664	170.00
5845	60.00	40.00	1.50		0.399	200.00
35846	60.00	41.00	4.00	0.30	1.051	201.36
J043	63.50	38.10	4.00		1.061	203.20
9334	70.00	25.00	1.50		0.379	190.00
6428	70.00	25.00	1.60		0.403	190.00
Z489	70.00	40.00	1.50		0.441	220.00
Z965	70.00	40.00	1.60		0.470	220.00
J105	70.00	40.00	2.00		0.585	220.00

Unequal Angles Group 1.1.4



McKechnie®
Transforming Aluminium

Unequal Angles Group 1.1.5

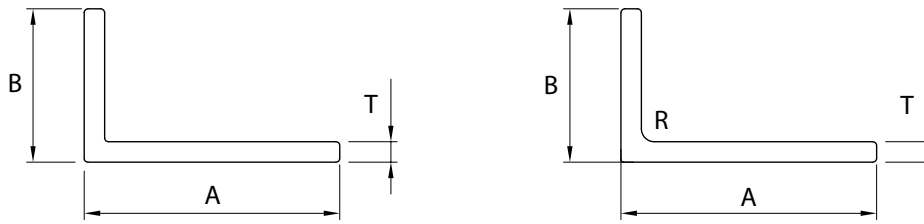


SECTION NO	A	B	T	R	MASS kg/m	OUTSIDE PERM
9586	75.00	25.00	2.50		0.658	200.00
30193	75.00	25.00	3.00		0.789	200.00
6788	75.00	50.00	3.00		0.988	250.00
35999	75.00	50.00	6.00		1.935	249.48
2313	76.20	25.40	3.18		0.845	203.20
1658	76.20	50.80	4.75	6.86	1.601	251.06
2386	76.20	50.80	6.35		2.085	254.00
9781	80.00	20.00	3.00		0.786	199.50
E918	80.00	40.00	5.00		1.558	240.00
34033	80.00	40.00	3.00		0.951	240.00
32252	85.00	60.00	4.00		1.528	290.00
6820	88.00	25.00	3.00		0.894	226.00
30524	90.00	40.00	1.50		0.522	260.00
34414	90.00	60.00	6.00		2.341	300.00
8266	100.00	25.00	3.00		0.992	250.00
37161	100.00	50.00	4.00		1.583	300.00
E927	100.00	50.00	6.00		2.341	300.00
34458	100.00	50.00	6.00	4.00	2.348	296.14
30252	100.00	75.00	8.00		3.621	350.00
33066	100.00	50.00	3.00		1.195	300.00
1122	101.60	50.80	9.53	6.62	3.710	301.50
Z966	110.00	40.00	1.60		0.643	300.00
9782	125.00	50.00	3.00		1.393	349.50
32716	125.00	55.00	5.00		2.371	360.00
8713#	150.00	120.00	10.00	10.00	7.077	535.00
33919	150.00	75.00	6.00		3.561	450.00
39126	150.00	75.00	8.00		4.704	449.23
35378#	150.00	150.00	10.00	6.00	7.877	595.28
36519	100.00	75.00	4.00		1.853	349.36
2601	152.40	76.20	6.35		3.810	457.20
33378#	200.00	100.00	10.00	6.00	7.880	597.42

These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Channels Group 1.2.1

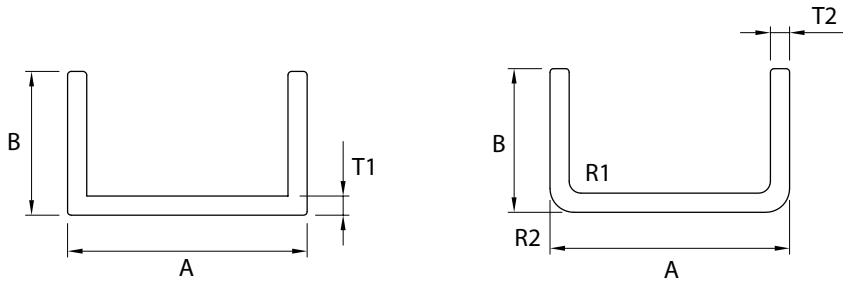


SECTION NO	A	B	T1	T2	R1	R2	MASS kg/m	OUTSIDE PERM
J168	10.00	10.00	1.60	1.60			0.116	56.80
0976	10.50	10.50	1.40	1.40			0.108	60.00
5978	12.00	12.00	1.60	1.60			0.142	68.80
5726	12.50	18.00	1.50	1.50			0.197	93.00
0371	12.70	12.70	2.54	2.54			0.226	71.10
E539	13.80	15.80	1.60	1.60			0.183	87.60
0765	14.15	11.89	1.52	1.52			0.143	72.80
5590	14.35	15.00	1.50	1.50			0.167	85.70
5979	16.00	16.00	1.60	1.60			0.194	92.80
0377	17.50	12.00	3.00	3.00			0.288	77.00
38158	18.00	25.00	2.00				0.347	130.97
6489	20.00	16.00	1.60	1.60			0.211	100.00
9482	20.00	20.00	1.60	1.60			0.245	116.00
5980	20.00	20.00	3.00	3.00			0.437	114.00
6209	20.00	25.00	2.50	2.50			0.439	135.00
Z566	20.00	45.00	2.50	2.50			0.711	215.00
0382	20.65	19.84	1.98	1.98	1.59		0.305	115.00
35472	21.60	20.00	1.60	1.60	0.25		0.253	119.79
9069	22.00	22.00	3.00	3.00			0.486	126.00
3470	22.23	12.70	1.57	1.57			0.190	92.10
6276	25.00	20.00	2.50	2.50			0.405	125.00
5723	25.00	25.00	1.50	1.50			0.291	147.00



McKechnie®
Transforming Aluminium

Channels Group 1.2.2

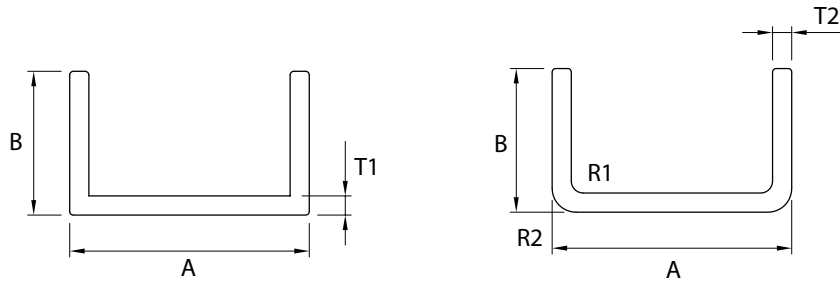


SECTION NO	A	B	T1	T2	R1	R2	MASS kg/m	OUTSIDE PERM
9335	25.00	25.00	1.60	1.60			0.310	146.80
4575	25.00	25.00	3.00	3.00			0.559	144.00
6476	25.00	40.00	3.00	3.00			0.801	204.00
4087	25.00	50.00	3.00	3.00			0.967	244.00
1770	28.58	6.35	1.57	1.57			0.161	79.40
32099	30.00	12.00	1.50	1.50			0.207	105.00
J088	32.00	25.00	3.00	3.00			0.618	158.00
8953	32.00	32.00	3.00	3.00			0.729	186.00
G210	36.00	36.00	2.50	2.50			0.698	211.00
33465	40.00	12.00	3.00	3.00			0.472	122.00
9677	40.00	20.00	1.60	1.60			0.332	156.80
9752	40.00	20.00	2.00	2.00			0.410	156.00
5982	40.00	20.00	3.00	3.00			0.599	154.00
6452	40.00	25.00	3.00	3.00			0.680	174.00
J242	40.00	40.00	3.00	3.00			0.927	234.00
31576	42.00	60.00	3.00	3.00			1.268	318.00
36089	43.00	43.00	3.00	3.00	2.00		1.010	252.82
2114	44.50	25.00	3.00	3.00			0.717	183.00
8521	50.00	16.00	3.00	3.00			0.616	158.00
5983	50.00	25.00	3.00	3.00			0.761	194.00
5984	50.00	50.00	3.00	3.00			1.166	294.00



McKechnie®
Transforming Aluminium

Channels Group 1.2.3

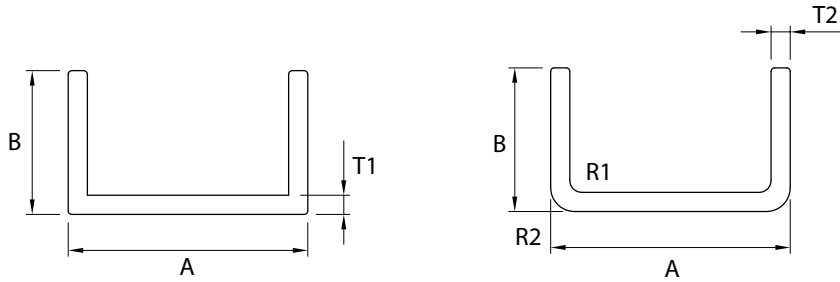


SECTION NO	A	B	T1	T2	R1	R2	MASS kg/m	OUTSIDE PERM
0500	50.80	34.93	3.18	3.18	1.57		0.984	233.60
6330	54.00	20.00	1.50	1.50			0.370	185.00
0504	57.15	31.75	3.96	3.96	5.08		1.235	229.00
G743	60.00	12.00	3.00	3.00			0.634	161.48
6128	60.00	25.00	3.00	3.00			0.842	214.00
35320	60.00	32.00	2.00	2.00			0.65	244.00
34080	60.00	32.00	2.00	2.00	5.00	1.50	0.629	235.85
J243	60.00	32.00	3.00	3.00			0.960	242.00
6945	60.00	32.00	4.00	4.00	4.00		1.257	238.28
35270	65.50	25.00	1.50	1.50	0.40		0.456	226.37
30487	75.00	25.00	3.00	3.00			0.967	244.00
39165	75.00	40.00	3.00	3.00			1.211	302.97
0288	76.20	38.10	4.75	4.75	7.62		1.900	288.80
0289	76.20	38.10	6.35	7.92	7.62		2.738	285.60
6983	80.00	25.00	3.00	3.00			1.008	254.00
J458	80.00	40.00	3.00	3.00			1.252	314.00
Z608	80.00	40.00	4.00	4.00			1.648	312.00
X685*	84.20	20.00	1.60	1.60			0.525	245.20
37078#	92.00	93.00	10.25	10.00	10.00	20.00	6.641	508.87
8716	100.00	25.00	3.00	3.00			1.166	294.00
6374	100.00	40.00	3.00	3.00			1.409	354.00
6944	100.00	45.00	4.80	4.80	3.00	0.75	2.347	352.40
J089	100.00	50.00	3.00	3.00			1.577	394.00

These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Channels Group 1.2.4

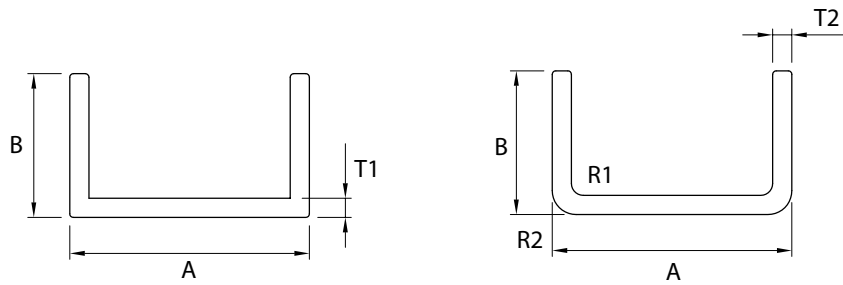


SECTION NO	A	B	T1	T2	R1	R2	MASS kg/m	OUTSIDE PERM
6982	100.00	50.00	6.00	6.00	0.80		3.046	387.00
33279	100.00	50.00	8.00	4.00	4.00		4.008	380.57
38503	100.00	70.00	10.00	10.00	1.00	5.00	5.934	453.99
1605	101.60	25.40	3.18	3.18			1.253	298.40
0291	101.60	50.80	6.35	7.92	9.14		3.740	385.90
36568	108.00	45.00	4.80	4.80	3.00		2.460	382.54
1442	114.30	44.45	3.18	3.18			1.690	400.00
7059	125.00	60.00	6.00	6.00	6.00		3.816	454.00
K430#	127.00	63.50	6.35	9.52	10.66		5.267	486.10
4760	150.00	75.00	5.00	5.00			3.915	590.00
39164#	150.00	75.00	8.00	8.00			5.431	586.97
1652#	152.40	63.50	6.35	7.92	10.67		5.193	536.90
33270#	160.00	60.00	10.00	10.00	10.00		7.162	531.42
35327	168.27	25.00	1.50	1.50	1.25	2.50	1.314	426.49
7060#	177.80	76.20	6.35	11.10	12.20		7.408	637.22
2776	203.20	63.50	4.75	4.75			4.113	650.90

These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Flats Group 1.3.1




SECTION NO	A	B	MASS kg/m	OUTSIDE PERM
33034	10.00	3.00	0.081	26.00
J781	10.00	3.00	0.082	26.00
J791 ⁺	12.00	3.00	0.097	30.00
9741	12.00	6.00	0.194	36.00
0320	12.70	4.75	0.163	34.90
5991	16.00	3.00	0.130	38.00
0939	19.05	2.64	0.137	43.38
5989	20.00	1.60	0.087	43.20
5992	20.00	3.00	0.162	46.00
J679*	20.00	4.00	0.217	48.00
4954	20.00	6.00	0.325	52.00
J093	20.00	12.00	0.650	64.00
9336	25.00	1.60	0.108	53.20
5993	25.00	3.00	0.203	56.00
J918	25.00	4.00	0.271	58.00
5996	25.00	6.00	0.405	62.00
5112	25.00	8.00	0.540	66.00
32561	25.00	10.00	0.678	70.00
5999	25.00	12.00	0.810	74.00
J092	25.00	20.00	1.355	90.00

SECTION NO	A	B	MASS kg/m	OUTSIDE PERM
0340	25.40	4.75	0.326	60.30
0537	25.40	9.53	0.654	69.90
K032	30.00	1.63	0.133	63.30
34559	30.00	3.00	0.244	66.00
0322	31.75	4.75	0.407	73.00
5179	31.75	6.00	0.516	75.50
4999	31.75	12.00	1.029	87.50
0634	31.75	12.70	1.089	88.90
9337	32.00	3.00	0.259	70.00
7288*	32.00	4.00	0.367	76.00
J345	32.00	6.00	0.520	76.00
J241	32.00	10.00	0.867	84.00
4996	38.00	6.00	0.601	88.20
5743	38.00	12.00	1.231	100.00
4987	38.10	3.00	0.310	82.20
0630	38.10	4.78	0.494	85.80
1362	38.10	15.88	1.634	108.00
6852	38.10	19.05	1.960	114.00
6077	40.00	3.00	0.324	86.00
6357	40.00	4.00	0.432	88.00
6706	40.00	6.00	0.648	92.00
X519	40.00	8.00	0.867	96.00



McKechnie®
Transforming Aluminium

Flats Group 1.3.2



SECTION NO	A	B	MASS kg/m	OUTSIDE PERM
7426	40.00	10.00	1.080	100.00
K013	40.00	12.00	1.301	104.00
J425	40.00	16.00	1.734	112.00
9751	40.00	20.00	2.160	120.00
9776	40.00	25.00	2.700	129.70
1864	44.45	3.18	0.384	95.25
33567	45.00	25.00	3.049	140.00
K024*	47.65	1.42	0.184	98.10
37068	50.00	1.60	0.217	103.20
5994	50.00	3.00	0.405	106.00
E531	50.00	5.00	0.678	110.00
5997	50.00	6.00	0.810	112.00
7468	50.00	8.00	1.080	116.00
7425	50.00	10.00	1.350	120.00
6000	50.00	12.00	1.620	124.00
J003	50.00	20.00	2.710	140.00
0506	50.80	4.75	0.651	111.10
J403	60.00	3.00	0.488	126.00
8776	60.00	6.00	0.972	132.00
K650	60.00	10.00	1.626	140.00
9777	60.00	12.00	1.944	143.70
5000	63.50	12.00	2.057	151.00

SECTION NO	A	B	MASS kg/m	OUTSIDE PERM
5780	63.50	25.40	4.355	177.80
J904	64.00	16.60	2.879	161.20
J900#	64.00	32.10	5.567	192.20
30835	66.00	6.00	1.073	144.00
35993	75.00	3.00	0.610	155.48
8590*	75.00	14.00	2.835	178.00
8589*	75.00	18.00	3.645	186.00
7556#	75.00	40.00	8.129	229.14
36231	75.00	10.00	2.032	169.48
4989	76.20	3.00	0.620	158.40
5662	76.20	6.00	1.234	164.40
0529	76.20	9.53	1.961	171.50
5001	76.20	12.00	2.469	176.40
5781#	76.20	25.40	5.226	203.20
J723	80.00	1.60	0.347	163.20
6373	80.00	3.00	0.648	166.00
7040	80.00	6.00	1.296	172.00
34955	80.00	8.00	1.734	175.14
8515	80.00	10.00	2.160	180.00
9742	80.00	12.00	2.592	184.00
J091	80.00	16.00	3.469	192.00
9862	80.00	20.00	4.320	200.00

These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.


* Some close tolerances apply

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Flats Group 1.3.3



SECTION NO	A	B	MASS kg/m	OUTSIDE PERM
J001#	80.00	25.00	5.420	210.00
K033	90.00	2.00	0.488	184.00
E359	90.00	2.50	0.610	185.00
K034	90.00	3.00	0.732	186.00
X472	90.00	12.00	2.927	204.00
G566	95.00	6.30	1.620	202.60
G567	95.00	9.20	2.369	208.40
E795	100.00	1.50	0.407	203.00
J712	100.00	1.60	0.433	203.20
5995	100.00	3.00	0.810	206.00
7392	100.00	4.00	1.080	204.00
Z120	100.00	5.00	1.355	210.00
5998	100.00	6.00	1.620	212.00
37645	100.00	8.00	2.168	215.66
8333*	100.00	10.00	2.700	220.00
6001	100.00	12.00	3.240	224.00
5021#	100.00	25.00	6.775	250.00
Z716#	100.00	33.00	8.943	266.00
N719**	100.00	40.00	10.840	280.00
0531	101.60	12.70	3.484	228.60
E300	108.00	8.00	2.341	232.00
31299	110.00	4.50	1.341	229.00
E319	110.00	5.00	1.491	230.00
7015	114.00	10.00	3.078	248.00


SECTION NO	A	B	MASS kg/m	OUTSIDE PERM
36321	115.00	6.00	1.868	240.63
36227	125.00	3.00	1.016	255.48
E301	125.00	6.00	2.033	262.00
3301	127.00	12.70	4.355	279.40
30962	130.00	5.00	1.762	270.00
30080	135.00	6.00	2.195	282.00
Z448	150.00	1.80	0.732	303.60
K145*	150.00	3.00	1.220	306.00
33972	150.00	5.00	2.033	310.00
31476	150.00	10.00	4.065	320.00
3620#	152.40	12.70	5.245	330.20
5784#	152.40	25.40	10.452	355.60
N917	160.00	4.00	1.734	328.00
8516	160.00	6.00	2.592	332.00
32706	160.00	8.00	3.469	336.00
9608	160.00	10.00	4.320	340.00
9432#	160.00	12.00	5.184	344.00
32577	190.00	24.00	12.358	428.00
38468	200.00	3.00	1.626	405.48
E320#	200.00	10.00	5.420	420.00
E321#	200.00	12.00	6.504	424.00
34020	204.00	3.00	1.658	413.14
38159#	300.00	10.00	8.129	618.63

These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Flats - Radius Edge Group 1.3.4



SECTION NO	A	B	R	MASS kg/m	OUTSIDE PERM
33620	19.01	2.64	1.32	0.132	41.03
0632	19.05	3.96	1.98	0.195	42.60
0864	19.05	4.78	2.36	0.233	43.50
5113	25.00	10.00	1.00	0.675	70.00
N734	25.40	6.35	3.18	0.414	58.05
9368	32.00	4.00	1.30	0.342	69.77
34913	36.00	6.00	3.00	0.564	78.85
X273	50.00	8.00	4.00	1.047	109.13
4978	50.00	25.00	1.60	3.382	147.25

SECTION NO	A	B	R	MASS kg/m	OUTSIDE PERM
X190	75.00	5.00	1.00	1.014	158.23
7556**	75.00	40.00	0.50	8.129	229.14
34314	75.00	52.00	0.40	10.569	253.31
9754	80.00	6.00	3.00	1.275	166.80
4980#	100.00	20.00	1.60	5.420	240.00
35870	110.00	10.00	0.80	2.980	238.63
35379	150.00	10.00	1.00	4.063	318.28
34020	204.00	3.00	0.50	1.658	413.14
7524	220.00	6.00	1.00	3.562	450.28

These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.


* Some close tolerances apply

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Half Rounds Group 1.3.5




SECTION NO	A	B	C	MASS kg/m	OUTSIDE PERM
0336	15.88	4.75	3.96	0.121	35.40
0275	25.40	4.75	3.18	0.153	53.30
0273	38.10	6.35	4.75	0.351	79.10

Half Rounds Group 1.3.5



McKechnie®
Transforming Aluminium

Hollows - Squares Group 1.4.1

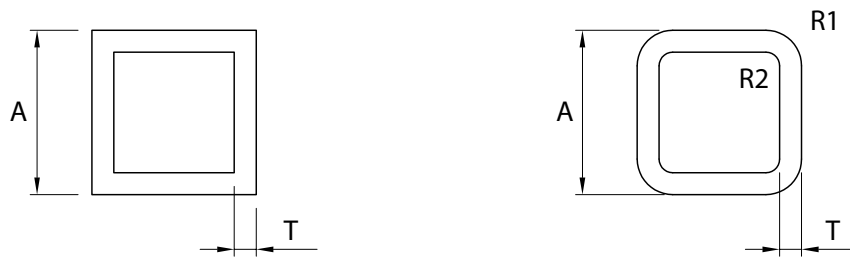

SECTION NO	A	T	R1	R2	MASS kg/m	OUTSIDE PERM	OUTSIDE FACTOR
34751	12.00	1.60			0.180	48.00	461
K721	12.60	1.50			0.180	50.40	493
9609	12.70	1.57			0.189	50.80	472
30211	16.00	1.20	1.60		0.187	61.25	620
5728	19.00	1.60	2.40	0.80	0.301	76.00	462
K025	19.05	1.20	1.50	0.30	0.227	73.60	615
8950	20.00	1.50			0.300	80.00	494
32961	20.00	2.00			0.390	80.00	369
8777	20.00	3.00	3.00		0.530	74.85	247
32957	20.00	3.00			0.553	80.00	246
9675	25.00	1.40	2.40	1.00	0.346	95.90	529
6614*	25.00	1.60			0.404	100.00	462
N285	25.00	1.80	3.00		0.432	94.85	418
K736	25.00	2.00			0.499	100.00	369
8778	25.00	3.00	3.00		0.695	94.85	246
9784	25.00	3.00			0.713	99.70	246
Z071	25.40	1.20	2.00	0.80	0.307	98.17	615
J114	25.40	1.22			0.320	101.60	605
0719	25.40	1.83	3.18	1.35	0.461	96.10	404
7841*	30.00	2.00	2.50	1.50	0.596	115.70	364
38479	30.00	2.00	0.30	0.30	0.607	119.48	367
38464	30.00	2.50	0.70	0.70	0.745	118.80	292
6947	30.00	3.00			0.875	120.00	247
K362	32.00	2.00			0.650	128.00	369


* Some close tolerances apply

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Hollows - Square Group 1.4.2

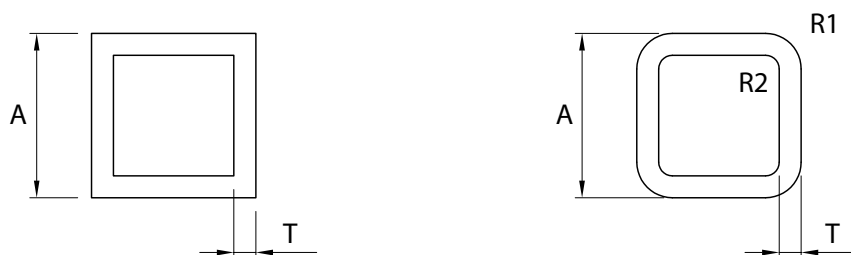

SECTION NO	A	T	R1	R2	MASS kg/m	OUTSIDE PERM	OUTSIDE FACTOR
K996	32.00	3.00	1.50		0.938	125.40	245
X547	32.00	3.00	3.00		0.922	122.85	246
J169	32.00	3.00			0.943	128.00	246
G677	33.90	1.45	2.50		0.498	131.31	509
K026	38.00	1.60	2.00	0.40	0.623	148.60	461
6059	38.00	2.00			0.778	152.00	370
N284	38.00	2.50			0.962	152.00	295
9193	40.00	1.60	3.00	1.40	0.647	154.85	463
K911	40.00	1.60			0.666	160.00	461
30196	40.00	2.00	2.40	0.40	0.811	155.88	369
G097	40.00	2.00			0.824	160.00	369
N737	40.00	3.00	3.00	1.00	1.185	154.85	245
X592	40.00	3.00			1.203	160.00	246
9192	40.00	4.00			1.555	160.00	185
32003	40.00	5.00	2.50		1.883	155.71	146
1468	44.45	2.03			0.933	177.80	364
E225	45.00	1.80			0.843	180.00	411
6114*	46.80	2.00			1.054	203.20	370
K132	50.00	1.60	6.00	4.00	0.801	189.90	461
J309	50.00	1.60			0.840	200.00	461
33479	50.00	2.00	3.00	1.00	1.022	194.85	369
31350	50.00	2.00	6.40	4.40	0.990	189.01	369
X591	50.00	2.00			1.041	200.00	369
9746	50.00	2.50			1.283	200.00	296
32565	50.00	3.00	3.00	1.00	1.510	194.85	244
32447	50.00	3.00	6.35	3.35	1.508	194.85	245
5917*	50.00	3.00			1.523	200.00	246
32734	50.00	5.00	4.00	2.00	2.411	193.13	145
32520	50.00	5.00	6.00	6.00	2.439	189.70	139
33268	50.00	6.00	6.35		2.768	189.10	123
1324	50.80	1.63	3.18	1.55	0.842	197.70	452


* Some close tolerances apply

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Hollows - Square Group 1.4.3

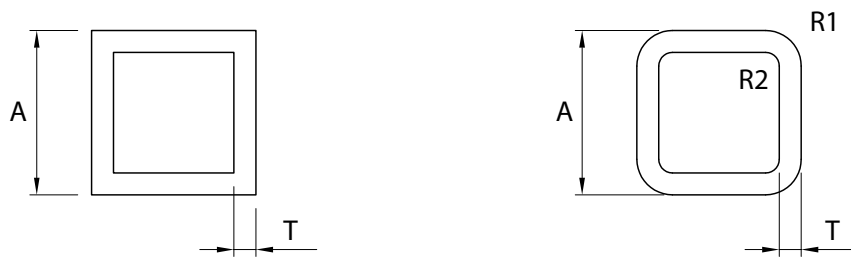

SECTION NO	A	T	R1	R2	MASS kg/m	OUTSIDE PERM	OUTSIDE FACTOR
X197	50.80	2.00	6.40	4.40	1.008	192.21	369
6114	50.80	2.00			1.054	203.20	370
X549	50.80	3.18	3.00		1.621	198.05	232
Z912	60.00	1.40	1.00	0.30	0.887	238.28	526
30210	60.00	1.60	0.80	1.50	1.017	238.63	456
38511	60.00	4.50	11.35	6.85	2.517	220.51	164
35589	65.00	2.40	0.40		1.628	259.31	307
K308	65.00	2.50			1.694	260.00	295
30209	65.50	1.60	1.60		1.102	259.25	461
31878	75.00	2.50			1.965	299.66	295
K323	75.00	3.00			2.341	300.00	246
38133	75.00	3.00	4.50	5.00	2.352	292.27	238
33133	75.00	4.00	6.00		3.004	289.70	185
33397	76.20	3.00	6.00	3.00	2.318	294.50	246
X550	76.20	6.35	15.90	9.60	4.434	277.50	117
X903*	80.00	2.20	4.00	4.00	1.855	313.13	328
33721	80.00	3.00			2.504	320.00	246
34415	90.00	1.90	3.00	1.00	1.796	354.85	389
38606	90.00	3.00	6.00	3.00	2.766	349.70	246
38607	100.00	3.00	11.00	8.00	3.022	381.12	246
Z320	100.00	3.00			3.154	400.00	246
E929#	100.00	6.00	12.00	6.00	5.863	379.40	123
36058#	100.00	5.00	3.00	0.50	5.129	394.85	147
17231	150.00	2.90	2.00		4.615	596.57	254

These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.


* Some close tolerances apply

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Hollows - Rectangular Group 1.4.4

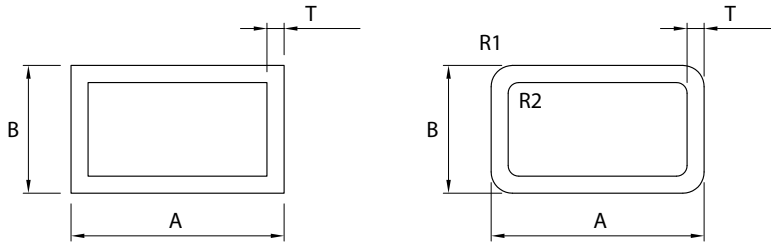

SECTION NO	A	B	T	R1	R2	MASS kg/m	OUTSIDE PERM	OUTSIDE FACTOR
30208	34.93	12.70	1.57	3.75	2.18	0.357	88.82	470
K496	37.40	14.40	1.20	3.00	2.00	0.308	98.20	613
9406*	38.00	25.00	1.50	3.00	1.50	0.470	120.80	494
X510	38.00	25.00	2.00	3.00	1.50	0.622	120.85	367
J782	38.10	17.45	3.18			0.848	111.10	232
X500	38.10	25.40	1.60	3.10	1.50	0.506	121.68	461
30624	40.00	15.00	3.00	3.00	0.50	0.776	104.85	245
30486	40.00	20.00	1.60			0.493	120.00	491
30485	40.00	20.00	3.00			0.878	120.00	246
35159	40.00	20.00	3.00			0.878	120.00	246
K582	40.00	25.00	2.00			0.661	130.00	369
35493	40.00	25.00	2.00	3.00	1.50	0.646	124.85	366
9785	40.00	25.00	2.50			0.810	129.70	296
35158	40.00	25.00	2.50	3.00	1.00	0.794	124.85	293
35309	40.00	25.00	3.00	3.00	3.00	0.959	124.85	235
E905	50.00	25.00	1.60			0.623	150.00	461
5916*	50.00	25.00	2.00			0.767	150.00	295
34406	50.00	25.00	2.00	3.00	1.00	0.751	144.85	369
6634	50.00	25.00	2.50			0.945	150.00	296
9433	50.00	25.00	3.00			1.118	150.00	247
X544	50.00	25.00	3.00	3.00		1.101	144.85	246
37044	50.00	30.00	2.00			0.824	160.00	369
30497	50.00	40.00	2.00			0.932	180.00	369
36992	50.00	40.00	2.00	1.00	3.00	0.914	174.85	369
G705	50.00	40.00	3.00			1.366	180.00	246
34765	50.80	25.40	3.18			1.204	152.40	232
0914	50.80	38.10	3.18			1.417	177.80	233
38431	58.50	38.50	1.85	2.00	1.00	0.926	191.90	399
Z913	60.00	30.00	1.40	1.00	0.30	0.659	178.28	526
6815	60.00	35.00	1.80	2.50		0.874	185.00	413
J090	60.00	40.00	3.00			1.528	200.00	246
1790	63.50	50.80	3.18			1.853	228.60	233

Special Tols.
Special Tols.


Hollows - Rectangular Group 1.4.4

* Some close tolerances apply



McKechnie®
Transforming Aluminium

Hollows - Rectangular Group 1.4.5

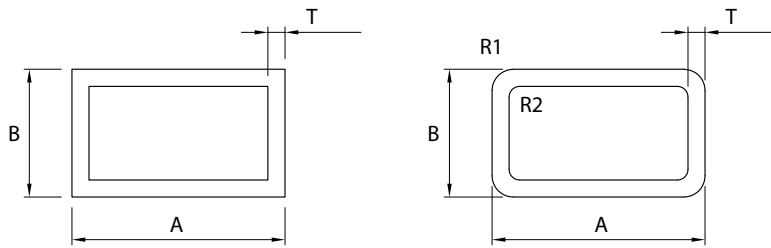


SECTION NO	A	B	T	R1	R2	MASS kg/m	OUTSIDE PERM	OUTSIDE FACTOR
31820	63.50	50.80	3.18	3.18		1.884	228.60	226
33669	65.00	16.00	1.20	1.50	1.00	0.508	159.42	610
Z357	65.00	16.00	1.20	3.00	2.00	0.500	156.85	611
7652	70.00	40.00	3.00			1.691	220.00	246
8042	75.00	25.00	1.60			0.836	200.00	462
30837	75.00	40.00	2.00			1.203	229.31	368
E709	75.00	50.00	2.50			1.626	250.00	295
37956	75.00	50.00	3.00			1.935	249.14	245
X861	75.00	50.00	4.75	7.00	4.00	2.897	237.98	153
K011	76.00	25.00	2.40			1.252	202.00	307
1023	76.20	38.10	6.35			3.484	228.60	116
G432	76.20	50.80	3.18			2.079	254.00	232
33386	80.00	25.00	2.40			1.303	210.00	308
K910	80.00	40.00	3.00			1.854	240.00	245
38177	80.00	40.00	3.00	3.00	0.50	1.833	234.85	245
37164	80.00	40.00	6.00			3.512	239.14	123
6490	80.00	50.00	3.00			2.008	260.00	247
30240	80.00	50.00	3.00	5.00	2.00	1.967	251.42	246
9822	100.00	16.00	2.00			1.210	232.00	370
31300	100.00	25.00	1.60			1.056	250.00	461
33022	100.00	25.00	2.00	2.00	0.50	1.305	246.57	367
6669	100.00	25.00	2.50			1.626	250.00	296
34296	100.00	40.00	3.00			2.179	280.00	246
7955	100.00	45.00	3.00			2.252	290.00	247
N297	100.00	50.00	1.60			1.273	300.00	461
J845	100.00	50.00	2.00			1.583	300.00	369
9985	100.00	50.00	3.00			2.341	300.00	246
30752	100.00	50.00	3.00	4.00	1.00	2.307	293.13	246
Z483	100.00	50.00	3.50	6.00	2.50	2.644	289.70	211
34048	100.00	50.00	4.00			3.079	300.00	185
K102	100.00	50.00	6.00	8.00	2.00	4.348	286.27	123
G435	100.00	50.00	6.50	0.20		4.827	300.00	113
33713	100.00	75.00	3.00			2.748	350.00	246



McKechnie®
Transforming Aluminium

Hollows - Rectangular Group 1.4.6

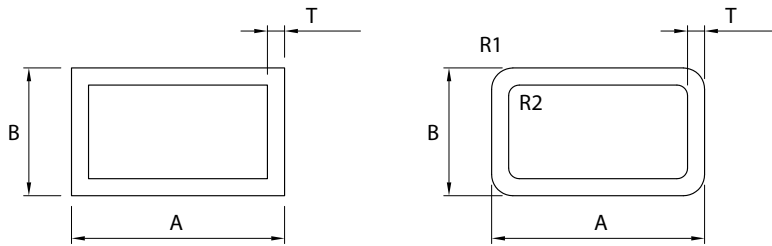


SECTION NO	A	B	T	R1	R2	MASS kg/m	OUTSIDE PERM	OUTSIDE FACTOR
G589	125.00	40.00	3.00			2.585	330.00	246
33272#	125.00	50.00	6.00	6.35	6.35	5.301	339.10	119
J863	150.00	50.00	3.00			3.154	400.00	246
Z422	150.00	50.00	4.00	7.50	3.50	4.060	387.12	185
30388#	150.00	75.00	5.00	5.00	2.50	5.783	441.42	146
37214	150.00	100.00	3.00			3.967	499.14	246
N064	152.40	38.10	3.18	1.00	1.00	3.174	379.28	231
Z335	200.00	50.00	3.00			3.960	500.00	246
35513	250.00	50.00	3.00	0.40		4.780	599.31	246
39274#	300.00	50.00	3.50			6.506	699.31	211

These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium


I Beams Group 1.5.1

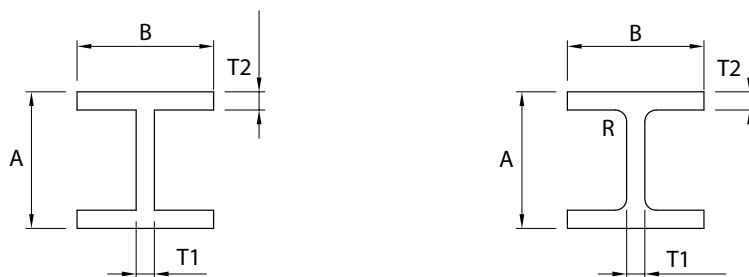

SECTION NO	A	B	T1	T2	R	MASS kg/m	OUTSIDE PERM
0433	50.80	44.45	2.54	2.54	0.80	0.928	271.92
8069	100.00	50.00	4.00	6.00	4.00	2.599	378.30
7603	100.00	75.00	4.75	6.00	3.50	3.575	471.00
30139	100.00	100.00	6.00	5.00	4.00	4.209	579.42
30959	125.00	70.00	7.00	6.00		4.319	465.70
9004#	140.00	90.00	7.50	7.50	4.00	6.148	605.00

These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.

Rounds Group 1.6.1



SECTION NO	DIA	MASS kg/m	OUTSIDE PERM
RD0060	6.00	0.077	18.85
RD0063	6.35	0.086	19.95
RD0077	7.75	0.128	24.35
RD0095	9.53	0.193	29.94
RD0096	9.60	0.196	30.16
RD0100	10.00	0.213	31.42
RD0111	11.10	0.263	34.87
RD0120	12.00	0.306	37.70
RD0127	12.70	0.342	39.90
RD0140	14.00	0.417	43.98
RD0159	15.88	0.537	49.89
RD0160	16.00	0.545	50.30
RD0175	17.50	0.649	54.98
RD0190	19.05	0.769	59.85
RD0200	20.00	0.851	62.80
RD0206	20.65	0.907	64.87
RD0222	22.23	1.052	69.84
RD0238	23.80	1.208	74.77
RD0250	25.00	1.325	78.54
RD0254	25.40	1.375	79.80
RD0270	27.00	1.555	84.80
RD0286	28.57	1.739	89.76

SECTION NO	DIA	MASS kg/m	OUTSIDE PERM
RD0301	30.15	1.939	94.72
RD0317	31.75	2.138	99.75
RD0320	32.00	2.180	100.53
RD0330	33.00	2.318	103.67
RD0349	34.93	2.587	109.74
RD0365	36.50	2.836	114.67
RD0390	39.00	3.237	122.50
RD0400	40.00	3.405	125.66
RD0413	41.30	3.630	129.75
30815	42.00	3.755	131.95
RD0445	44.45	4.190	139.64
RD0476	47.63	4.829	149.60
RD0500 [#]	50.00	5.321	157.08
RD0508 [#]	50.80	5.472	159.59
RD0520 [#]	52.00	5.755	163.36
RD0540 [#]	54.00	6.206	169.65
RD0571 [#]	57.15	6.926	179.54
RD0600 [#]	60.00	7.662	188.50
RD0603 [#]	60.32	7.715	189.50
RD0635 [#]	63.50	8.551	199.49
RD0650 [#]	65.00	8.993	204.20
RD0699* [#]	69.90	10.361	219.59

These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.

* Some close tolerances apply

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Squares Group 1.6.2




SECTION NO	A/F	MASS kg/m	OUTSIDE PERM
SQ0064	6.35	0.109	25.40
SQ0100	10.00	0.271	40.00
SQ0120	12.00	0.390	48.00
SQ0127	12.70	0.435	50.08
SQ0159	15.88	0.681	63.52
SQ0160	16.00	0.694	64.00
SQ0190	19.05	0.980	76.20
SQ0200	20.00	1.084	80.00
SQ0250	25.00	1.694	100.00
SQ0254	25.40	1.741	101.60
SQ0318	31.75	2.721	127.00
SQ0381	38.10	3.919	152.40
SQ0400	40.00	4.320	160.00
SQ0445#	44.45	5.335	177.80
SQ0500#	50.00	6.750	200.00
SQ0508#	50.80	6.968	203.20
SQ0635#	63.50	10.927	254.00

These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Hexagons Group 1.6.3




SECTION NO	A/F	MASS kg/m	OUTSIDE PERM
HX0100	10.00	0.234	86.40
HX0111	11.10	0.290	38.46
HX0120	12.00	0.337	41.05
HX0127	12.70	0.379	43.99
HX0143	14.28	0.479	49.47
HX0159	15.88	0.592	55.01
HX0170	17.00	0.678	58.63
HX0190	19.00	0.847	65.82
HX0222	22.22	1.159	76.99
HX0254	25.40	1.514	87.86
HX0286	28.58	1.917	99.00
HX0318	31.75	2.357	110.01
HX0330	33.00	2.556	114.32
HX0381	38.10	3.394	132.01



McKechnie®
Transforming Aluminium

Tees Group 1.7.1

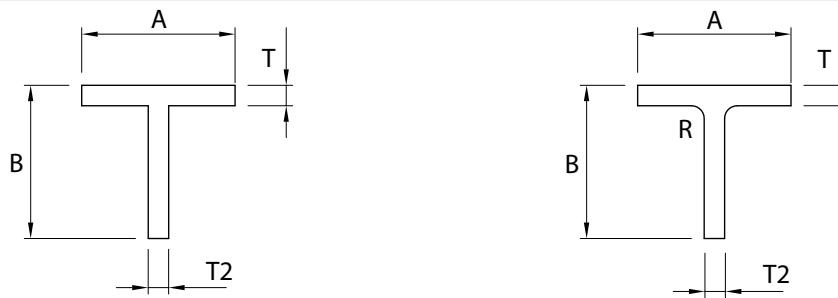

SECTION NO	A	B	T	T2	R	MASS kg/m	OUTSIDE PERM
5985	20.00	20.00	1.60			0.166	80.00
5986	20.00	20.00	3.00			0.300	80.00
0410	20.62	13.46	1.57	3.18	0.79	0.187	66.00
4870	25.00	25.00	3.00			0.382	100.00
5987	25.00	25.00	1.60			0.209	100.00
4478	25.40	25.40	3.18			0.410	101.60
K657	40.00	20.00	1.50			0.238	120.00
N771	40.00	25.00	2.50			0.423	130.00
7389	40.00	40.00	1.60			0.340	160.00
5988	40.00	40.00	3.00			0.624	160.00
0637	44.45	25.40	2.54		0.79	0.458	135.75
31117	50.00	100.00	6.00		4.00	2.357	293.99
X553	50.00	50.00	4.00			1.041	200.00
36229	50.00	50.00	6.00			1.528	199.23
37947	50.00	60.00	5.00	5.00		1.422	219.23
1184	50.80	50.80	4.75		6.10	1.284	198.00
1123	50.80	50.80	6.35		6.10	1.676	198.00
2207*	50.00	50.00	3.00			0.789	200.00
1478	63.50	63.50	6.35		6.86	2.123	248.10
36230	75.00	75.00	4.50			1.774	299.23
37805	75.00	125.00	10.00			5.147	397.94
31274	100.00	65.00	5.00			2.168	330.00


* Some close tolerances apply

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Extruded Tubes Group 1.8.1

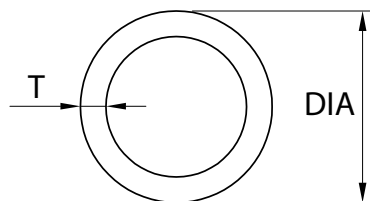


SECTION NO	DIA	T	MASS kg/m	OUTSIDE PERM	OUTSIDE FACTOR
TU8090	9.53	1.42	0.098	29.90	520.0
TU8000	10.00	1.20	0.090	31.40	614.0
TU8235	10.00	1.60	0.114	31.40	463.0
TU8222	12.00	1.60	0.142	37.70	460.0
TU8110	12.70	1.42	0.136	39.90	525.0
TU8020	15.88	1.22	0.152	49.90	606.0
TU8260	15.88	1.63	0.197	49.90	455.0
TU8530	15.88	2.64	0.297	49.90	280.0
TU8014	16.00	1.20	0.151	50.30	615.0
TU8120	16.00	1.42	0.174	49.90	522.0
TU8237	16.00	1.60	0.196	50.30	462.0
TU8219	19.00	1.50	0.224	59.70	491.0
TU8265	19.04	1.63	0.241	59.80	454.0
TU8030	19.05	1.22	0.185	59.80	606.0
TU8140	19.05	1.42	0.213	59.80	520.0
TU8433	19.05	2.00	0.289	59.80	370.0
TU8007	20.00	1.20	0.192	62.83	615.0
TU8240	20.00	1.60	0.251	62.80	461.0
35575	20.00	3.00	0.434	62.83	246
TU8035	22.23	1.22	0.217	69.80	608.0
TU8150	22.23	1.42	0.251	69.80	521.0
TU8290	22.23	1.63	0.284	39.80	456.0
TU8018	25.00	1.20	0.243	78.50	615.0
TU8218	25.00	1.50	0.300	78.50	492.0
TU8244	25.00	1.60	0.318	78.50	462.0
TU8440	25.00	2.00	0.390	78.50	370.0
TU8575	25.00	3.00	0.562	78.50	246.0
TU8040	25.40	1.22	0.251	79.80	608.0
TU8160	25.40	1.42	0.290	79.80	520.0
TU8245	25.40	1.60	0.323	79.80	461.0

SECTION NO	DIA	T	MASS kg/m	OUTSIDE PERM	OUTSIDE FACTOR
TU8460	25.40	2.03	0.403	79.80	364.0
TU8580	25.40	3.00	0.573	79.80	246.0
TU8840	25.40	6.35	1.026	79.80	117.0
TU8590	27.00	3.00	0.611	84.80	246.0
TU8050	28.58	1.22	0.284	89.80	605.0
TU8170	28.58	1.42	0.327	89.80	522.0
TU8055	31.75	1.22	0.315	99.70	608.0
TU8180	31.75	1.42	0.366	99.70	521.0
TU8600	31.75	3.00	0.713	99.70	247.0
TU8239	32.00	1.60	0.414	100.50	461.0
TU8432	32.00	1.85	0.473	100.50	401.0
TU8601	32.00	3.00	0.741	100.50	246.0
TU8185	34.93	1.42	0.405	109.70	520.0
TU8231	34.93	1.50	0.427	109.70	492.0
TU8247	35.70	1.60	0.465	112.15	442.0
TU8190	38.10	1.42	0.443	119.70	520
TU8523	38.10	2.40	0.724	119.70	310
TU8610	38.10	3.00	0.896	119.70	246
TU8790	38.10	4.88	1.377	119.70	152
TU8910	38.10	9.53	2.309	119.70	78
TU8249	40.00	1.60	0.523	125.70	461
TU8441	40.00	2.00	0.647	125.70	369
TU8615	40.00	3.00	0.942	125.70	253
TU8748	40.00	4.00	1.226	100.53	217
TU8805	40.00	5.00	1.490	125.70	148
TU8991	40.50	3.00	0.958	127.23	246
TU8200	41.28	1.42	0.482	129.70	520
TU8911	42.00	7.50	2.203	131.95	98
TU8775	43.00	4.50	1.470	135.10	165



McKechnie®
Transforming Aluminium

Extruded Tubes Group 1.8.2

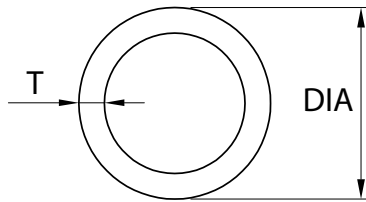

SECTION NO	DIA	T	MASS kg/m	OUTSIDE PERM	OUTSIDE FACTOR
TU8524	43.30	2.50	0.868	136.03	295
TU8210	44.45	1.42	0.519	139.60	521
TU8425	44.45	1.65	0.599	139.60	233
TU8442	44.45	2.00	0.723	139.60	369
TU8620	44.45	3.00	1.059	139.60	246
TU8765	44.45	3.25	1.140	139.64	259
TU8994	45.00	3.00	1.073	141.37	246
TU8526	46.00	2.50	0.922	144.50	296
TU8806	46.70	5.00	1.769	146.70	148
TU8215	47.63	1.42	0.558	149.60	520
TU8621	48.00	3.00	1.145	150.80	237
TU8555	48.40	2.60	1.014	152.10	288
TU8992	48.40	3.20	1.231	152.05	231
TU8780	48.41	4.47	1.666	152.10	166
TU8251	50.00	1.60	0.659	157.08	461
TU8443	50.00	2.00	0.817	157.08	369
TU8630	50.00	3.00	1.196	157.10	295
TU8752	50.00	4.00	1.567	157.08	184
TU8810	50.00	5.00	1.916	157.08	148
TU8815	50.00	6.00	2.248	157.00	123
TU8217	50.80	1.42	0.597	159.60	520
TU8248	50.80	1.60	0.668	159.60	463
TU8560	50.80	2.64	1.080	159.60	280
TU8640	50.80	3.00	1.216	159.60	247
TU8710	50.80	3.25	1.311	159.60	228
TU8650	57.00	3.00	1.374	179.10	247
TU8410	57.15	1.63	0.766	179.50	455
TU8510	57.15	2.03	0.950	179.50	365
TU8446	60.00	2.00	0.986	188.50	370
TU8649	60.00	3.00	1.456	188.50	246


SECTION NO	DIA	T	MASS kg/m	OUTSIDE PERM	OUTSIDE FACTOR
TU8800	60.00	4.90	2.290	188.50	151
TU8813	60.00	5.00	2.341	188.50	148
TU8812	60.20	5.54	2.578	189.12	133
TU8420	63.50	1.63	0.859	199.50	324
TU8447	63.50	2.00	1.047	199.49	369
TU8720	63.50	3.25	1.661	199.50	228
TU8725	63.50	3.81	1.936	199.49	375
TU8756	63.50	4.00	2.026	199.49	185
TU8809	63.50	5.00	2.490	199.50	148
TU8820	63.50	6.00	2.937	199.50	123
TU8451	70.00	2.00	1.158	219.91	369
TU8450	75.00	2.00	1.243	235.62	369
TU8993	75.00	3.00	1.839	235.62	246
TU8747	76.00	3.75	2.307	238.76	197
TU8520	76.20	2.03	1.282	239.39	364
TU8528	76.20	2.60	1.629	239.40	284
TU8730	76.20	3.25	2.011	239.40	228
TU8787	76.20	4.75	2.889	239.40	156
TU8448	80.00	2.00	1.301	251.30	377
TU8651	80.00	3.00	1.959	251.30	247
TU8558	88.90	2.30	1.696	279.29	321
TU8740	88.90	3.25	2.361	279.30	228
TU8808	88.90	5.49	3.899	279.30	134
TU8990#	92.00	17.00	10.860	289.03	43
TU8252	100.00	1.60	1.340	314.16	461
TU8449	100.00	2.00	1.669	314.20	369
TU8655	100.00	3.00	2.478	314.20	246
TU8760	100.00	4.00	3.269	314.16	185
TU8830	100.00	6.00	4.802	314.16	123

These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Extruded Tubes Group 1.8.3

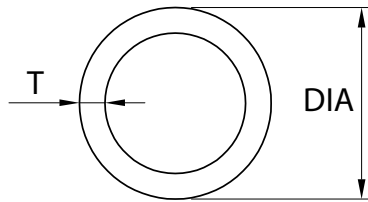


SECTION NO	DIA	T	MASS kg/m	OUTSIDE PERM	OUTSIDE FACTOR
TU8745	101.60	3.25	2.711	319.20	228
TU8522	111.10	2.20	2.040	349.03	335
TU8828	114.00	5.00	4.640	358.14	148
TU8559	127.00	2.60	2.754	398.98	284
30319	150.00	3.20	3.999	471.24	231



McKechnie®
Transforming Aluminium

Zeds Group 1.9.1

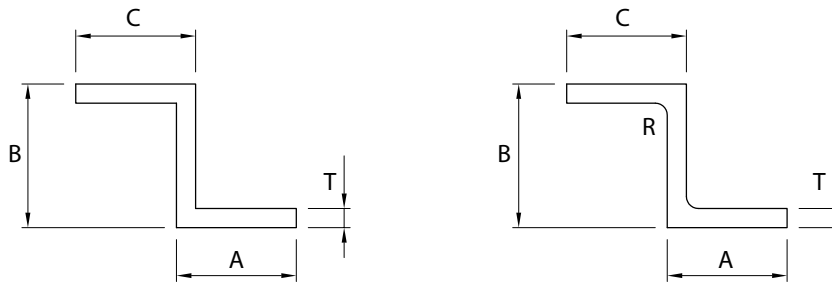


SECTION NO	A	B	C	T	R	MASS kg/m	OUTSIDE PERM
N974	18.50	17.00	18.50	1.40	0.50	0.193	103.90
Z980	20.00	25.00	20.00	1.50		0.252	127.00
36770	20.00	33.00	38.00	6.00		1.277	165.71
0580	25.40	44.45	25.40	3.18	3.30	0.776	181.30
1508	31.75	152.40	31.75	3.18	3.18	1.811	422.70
32662	50.00	125.00	50.00	3.00	3.00	1.790	440.14




McKechnie®
Transforming Aluminium

Top Hats Group 1.10.1

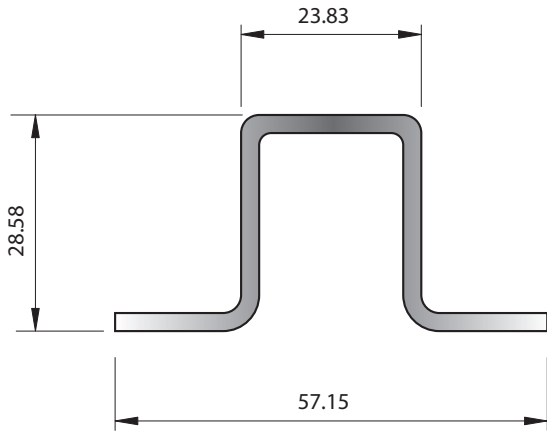

SECTION No. 0297*
0.727 kg/m
P = 212.69

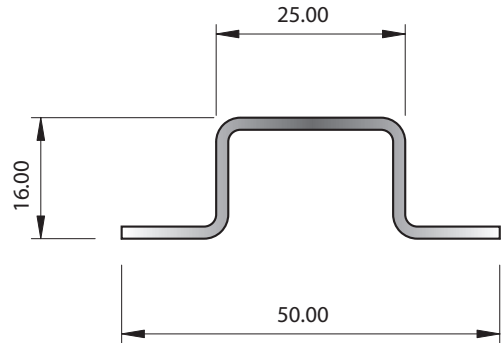

SECTION No. 0582
0.323 kg/m
P = 153


* SOME SPECIAL TOLERANCES APPLY

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.




McKechnie®
Transforming Aluminium

Top Hats Group 1.10.2

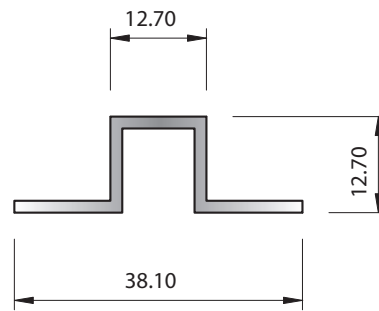


SECTION No. 4519
0.256 kg/m
P = 124

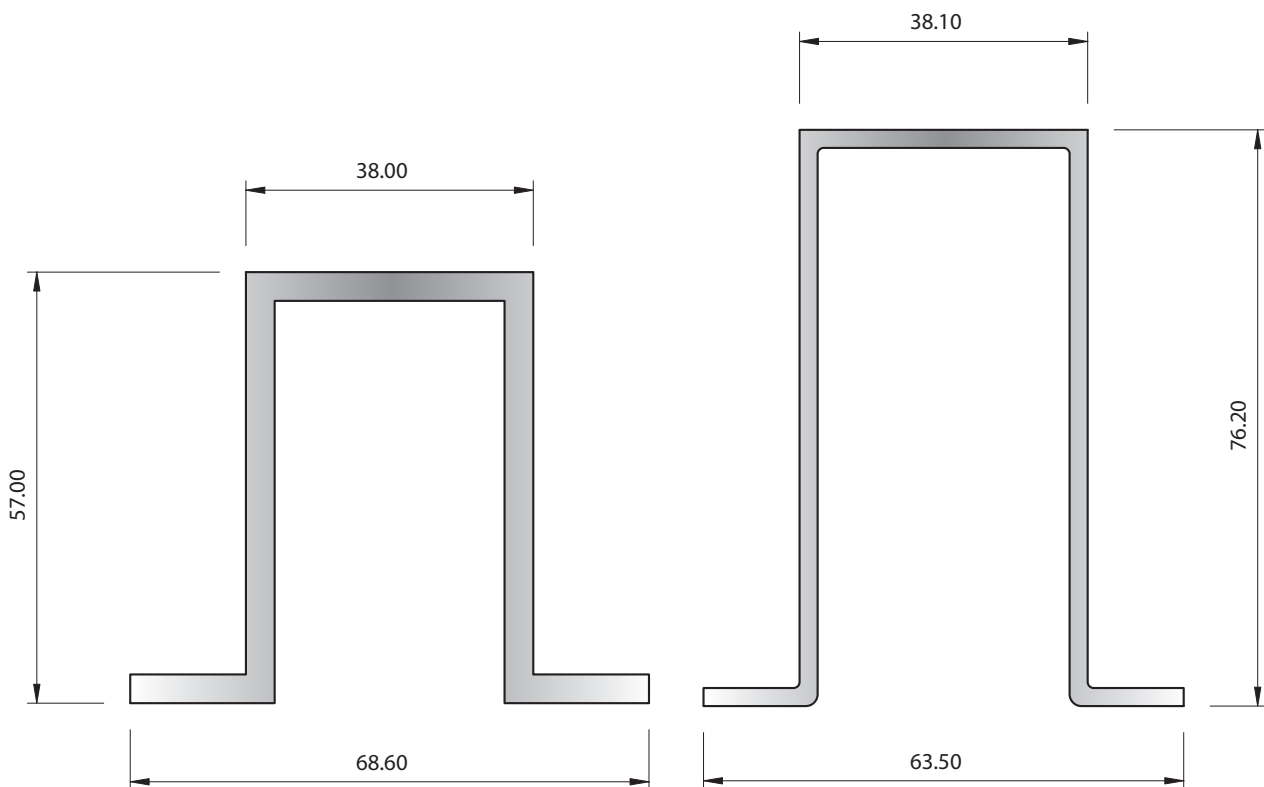


SECTION No. 5081
1.798 kg/m
P = 358

SECTION No. 2418
1.361 kg/m
P = 424


Top Hats Group 1.10.3

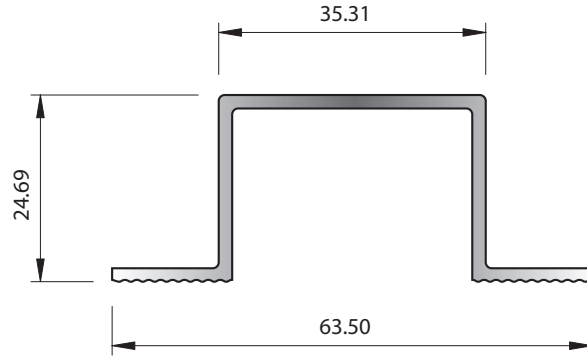

SECTION No. 2184*
0.517 kg/m
P = 221.21

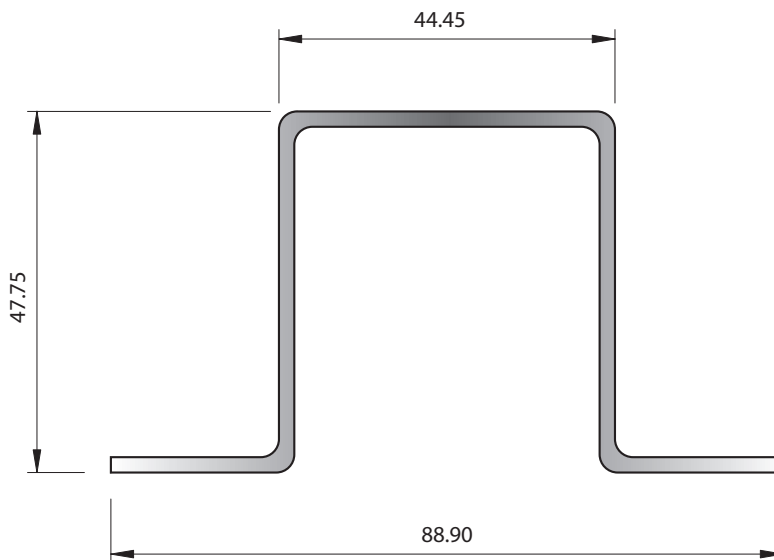

SECTION No. 0954
0.988 kg/m
P = 357

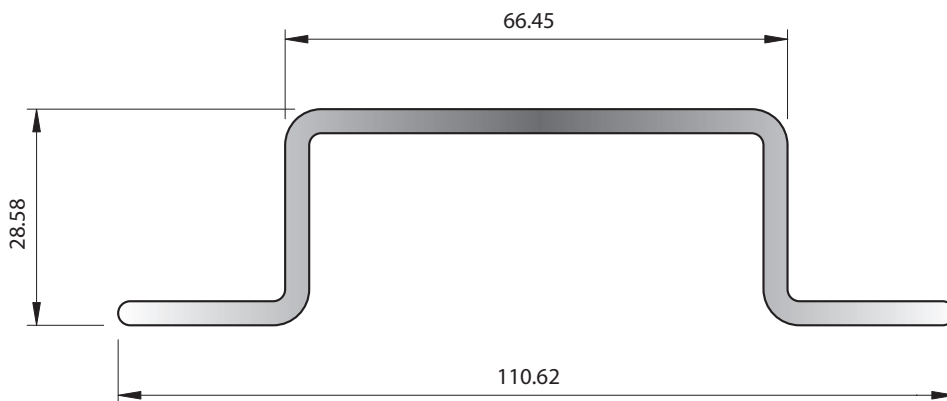

SECTION No. 0687
1.333 kg/m
P = 316


* SOME SPECIAL TOLERANCES APPLY

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.




McKechnie®
Transforming Aluminium

Top Hats Group 1.10.4

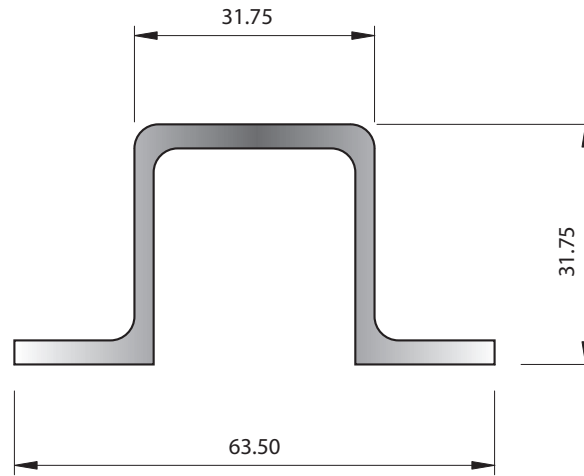


SECTION No. Z741
0.952 kg/m
P = 239.45

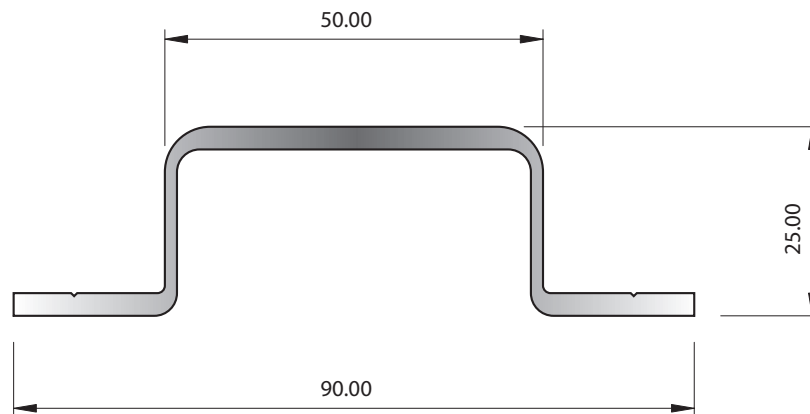


SECTION No. G481
0.881 kg/m
P = 263.50


Miscellaneous Angles Group 1.11.1

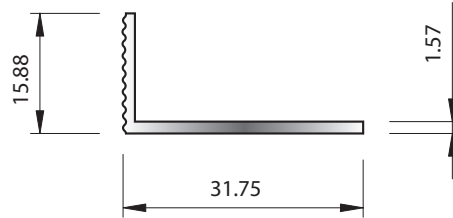

SECTION No. 2089
0.187 kg/m
P = 97



SECTION No. 38185
0.413 kg/m
P = 100




SECTION No. 38186
0.293 kg/m
P = 100




McKechnie®
Transforming Aluminium

Miscellaneous Channels Group 1.12.1

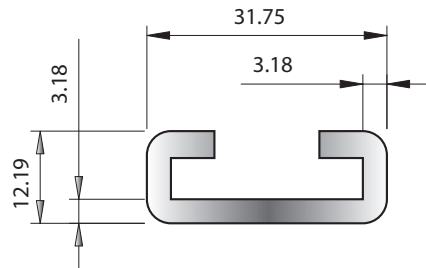


SECTION No. 0877
0.518 kg/m
P = 122.08

Miscellaneous Channels Group 1.12.2



SECTION No. 5590
0.167 kg/m
P = 85.70

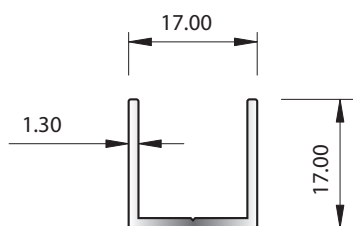


SECTION No. 31017
0.170 kg/m
P = 98.88




McKechnie®
Transforming Aluminium

Miscellaneous Channels Group 1.12.3

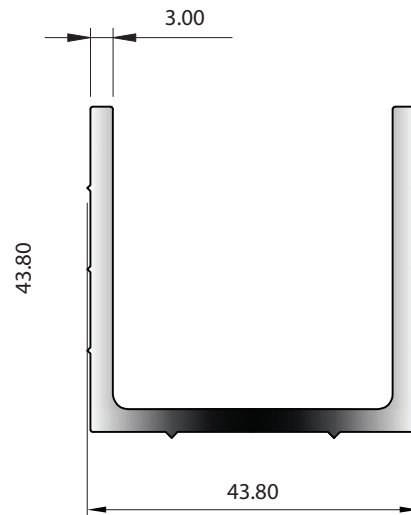

SECTION No. 36089
1.010 kg/m
P = 252.82

Miscellaneous Channels Group 1.12.4

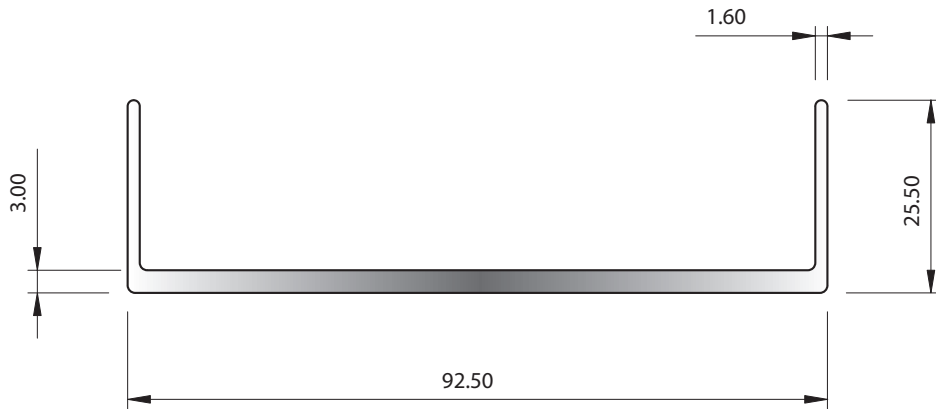


SECTION No. 5854
0.942 kg/m
P = 278




McKechnie®
Transforming Aluminium

Miscellaneous Channels Group 1.12.5

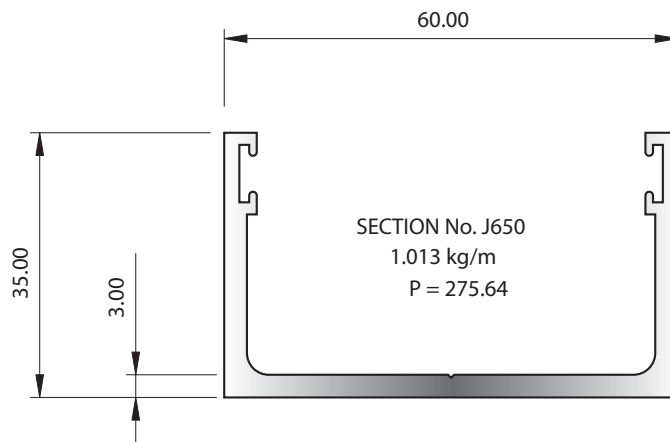

Miscellaneous Channels Group 1.12.6


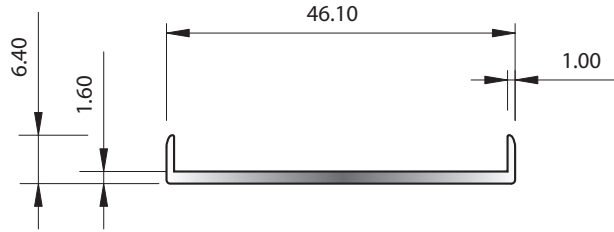


SECTION No. K768*
0.224 kg/m
P = 113.08




McKechnie®
Transforming Aluminium


Miscellaneous Channels Group 1.12.7

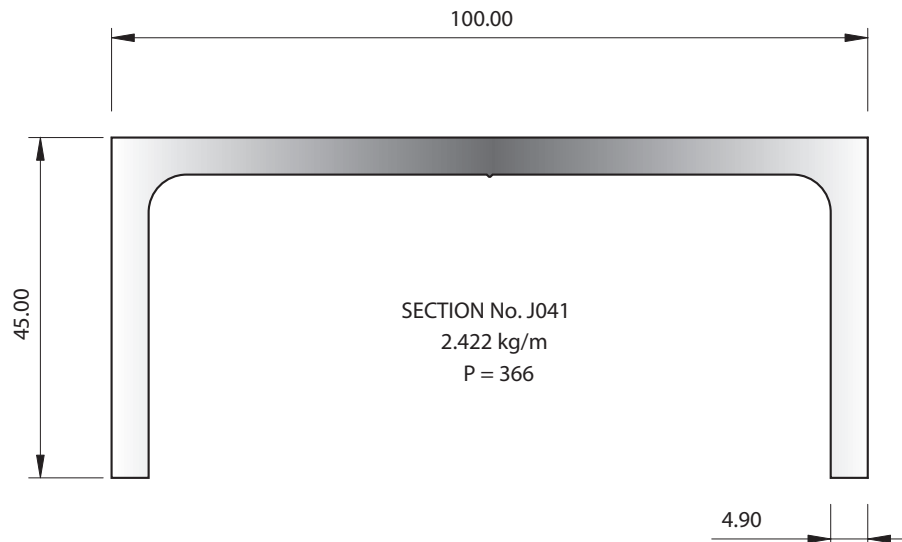

Miscellaneous Tees Group 1.13.1



SECTION No. 0410
0.187 kg/m
P = 66

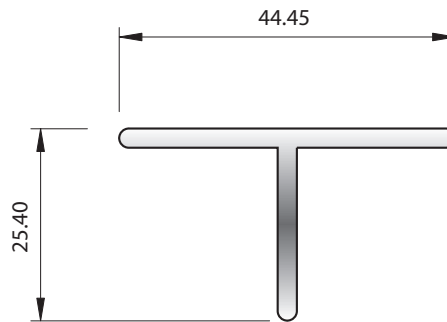


SECTION No. 0637
0.458 kg/m
P = 135.75



McKechnie®
Transforming Aluminium

Miscellaneous Tubes Group 1.14.1

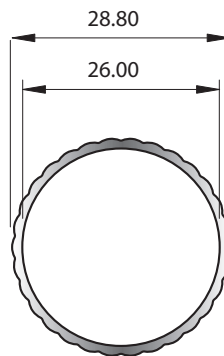

SECTION No. 7439*
0.298 kg/m
P = 92

* SOME SPECIAL TOLERANCES APPLY

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.



Building Exterior


McKechnie®
Transforming Aluminium






McKechnie®
Transforming Aluminium

Balustrades Group 2.1.1

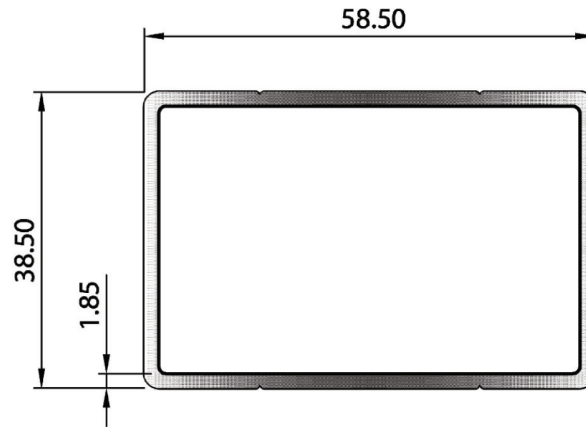


SECTION No. 38431
0.926 kg/m
Ext. P = 191.9 mm

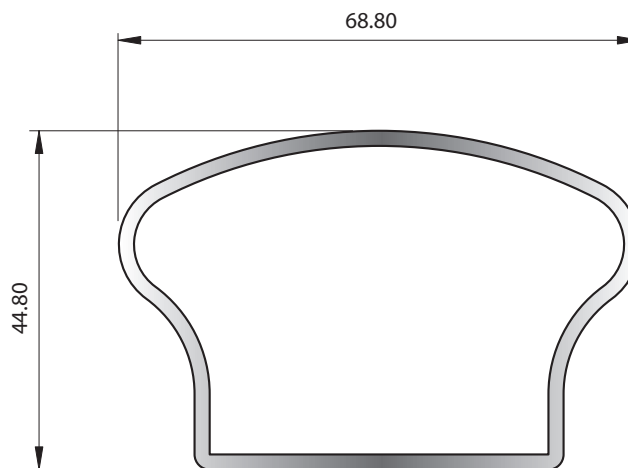

SECTION No. J589
1.017 kg/m
P = 193.90

Balustrades Group 2.1.2

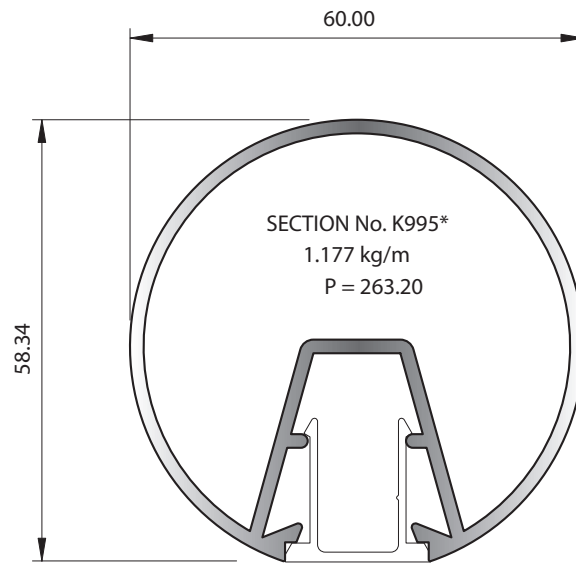


* SOME SPECIAL TOLERANCES APPLY

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.




McKechnie®
Transforming Aluminium


Balustrades Group 2.1.3

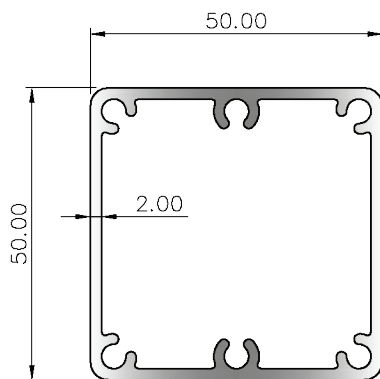


SECTION No. 34343
1.224 kg/m
P = 194.85




SECTION No. J410
0.640 kg/m
P = 157.40



SECTION No. X537
0.179 kg/m
P = 95.84



SECTION No. X534
0.430 kg/m
P = 90.55




SECTION No. J412
0.314 kg/m
P = 78.30




McKechnie®
Transforming Aluminium


Coolstore and Annexes Group 2.2.1

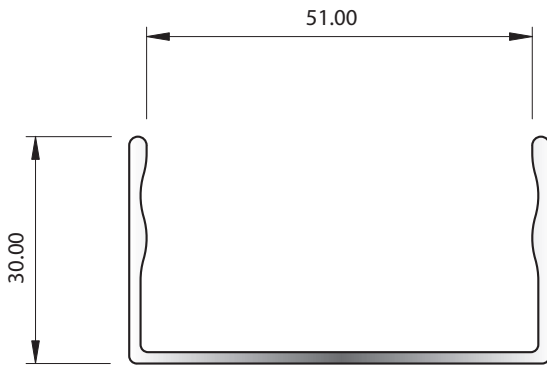

SECTION No. 8570
0.501 kg/m
P = 226.56

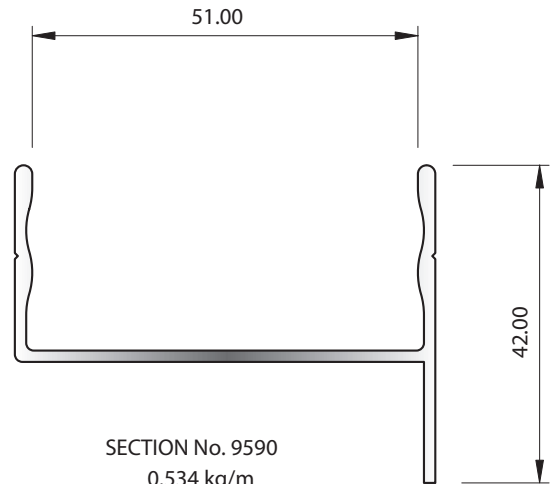

SECTION No. 9590
0.534 kg/m
P = 244



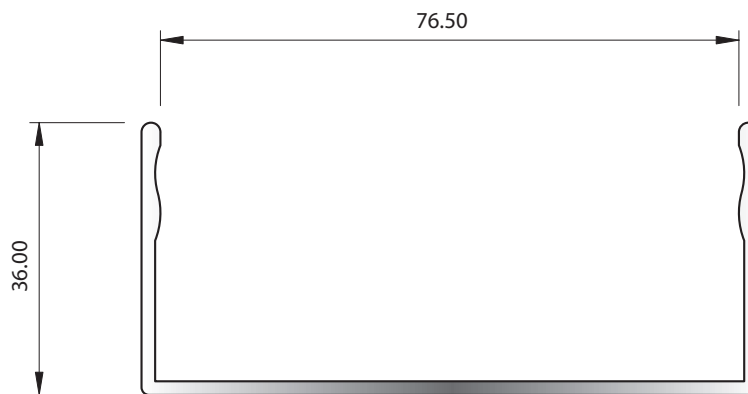


SECTION No. 7791
0.762 kg/m
P = 302.27





McKechnie®
Transforming Aluminium

Coolstore and Annexes Group 2.2.2

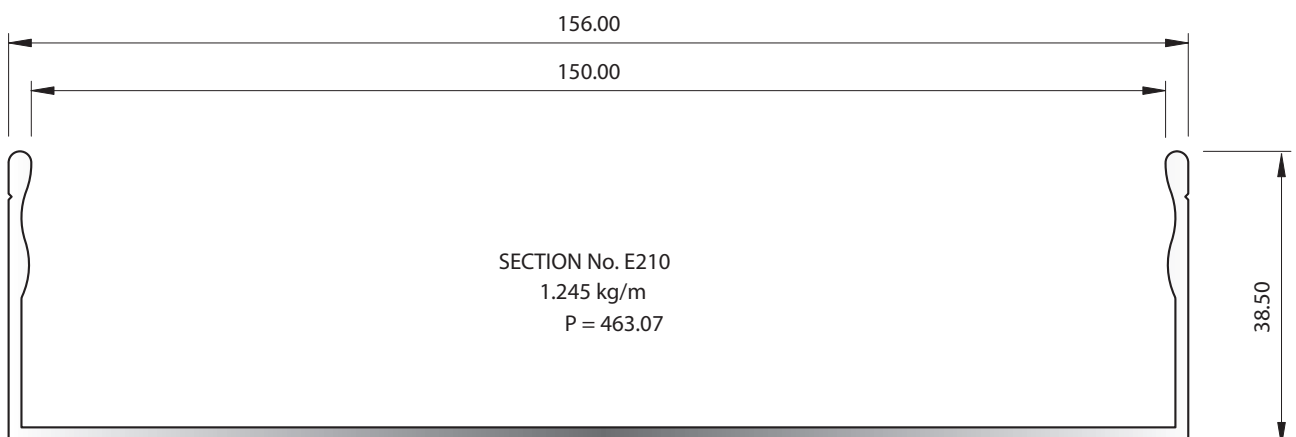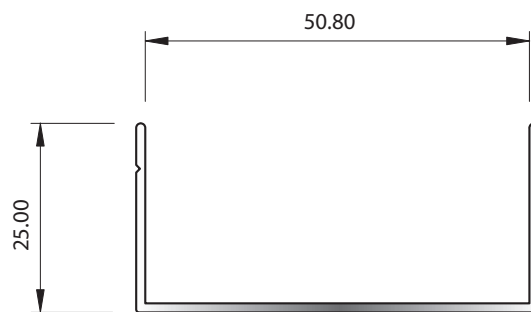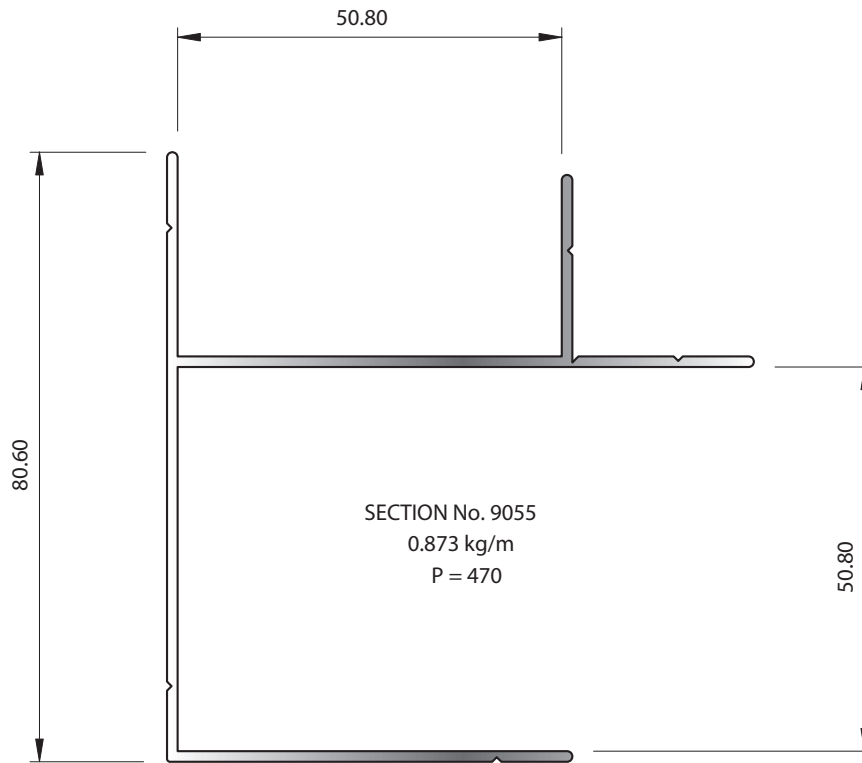

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.


Coolstore and Annexes Group 2.2.3

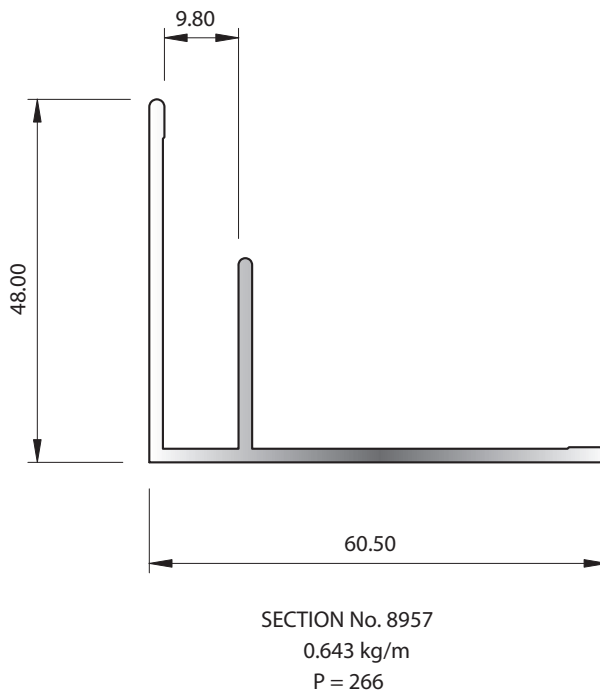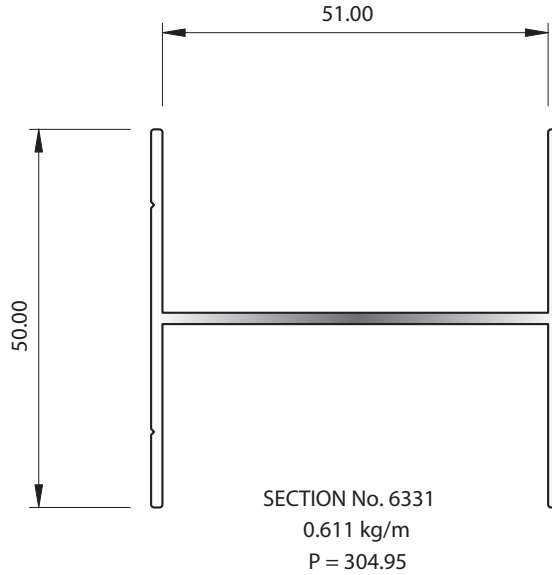




McKechnie®
Transforming Aluminium

Coolstore and Annexes Group 2.2.4



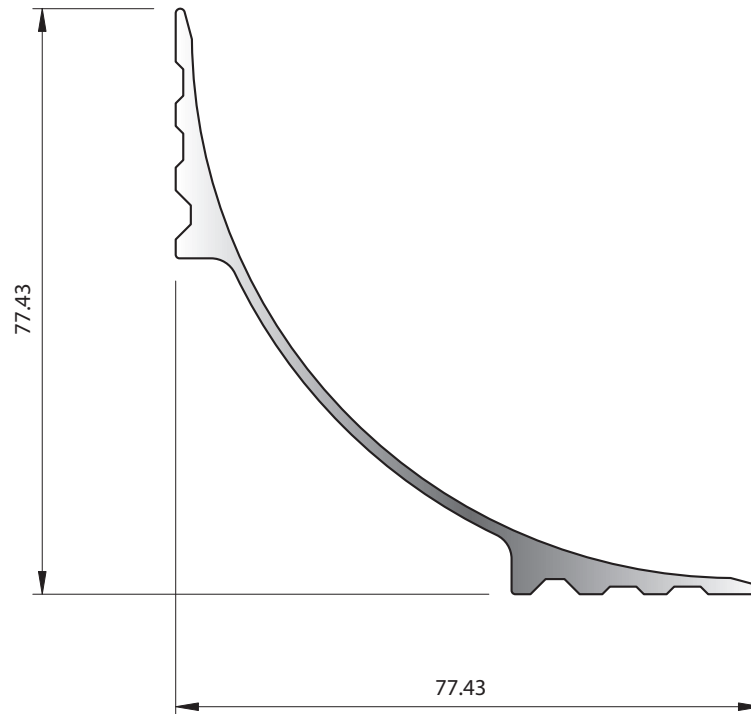


SECTION No. 8174
0.831 kg/m
P = 260.61

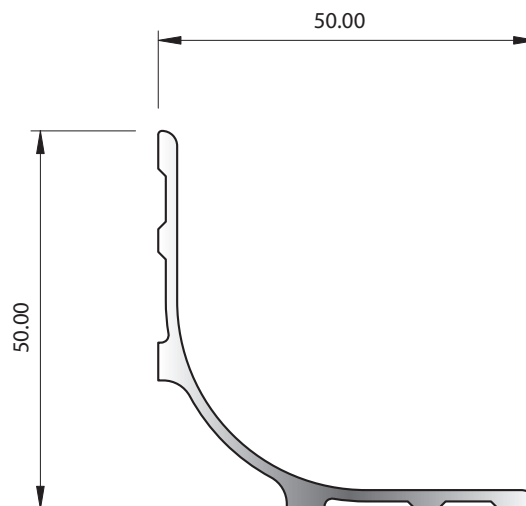

SECTION No. 7360
0.463 kg/m
P = 182.84



Coolstore and Annexes Group 2.2.5

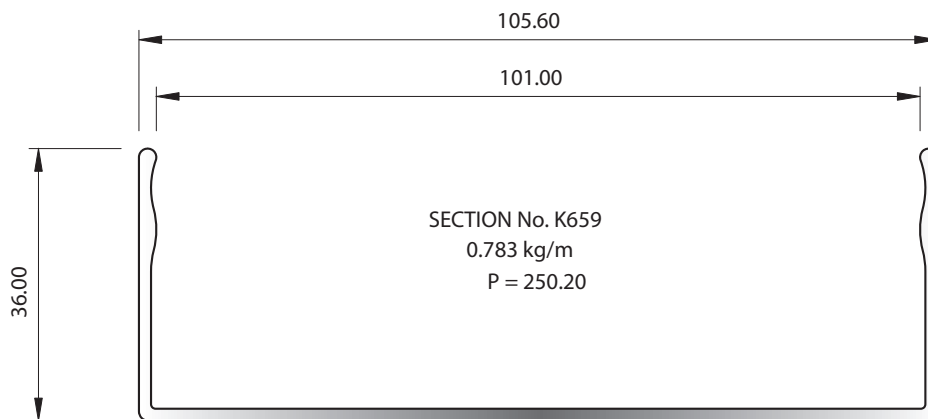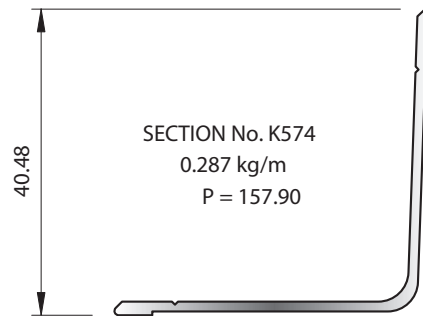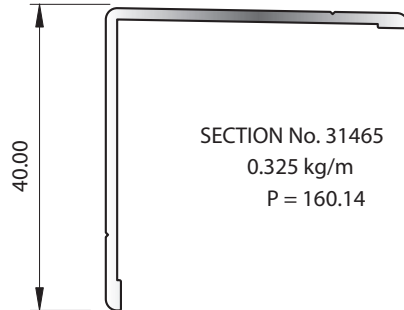




McKechnie®
Transforming Aluminium


Coolstore and Annexes Group 2.2.6

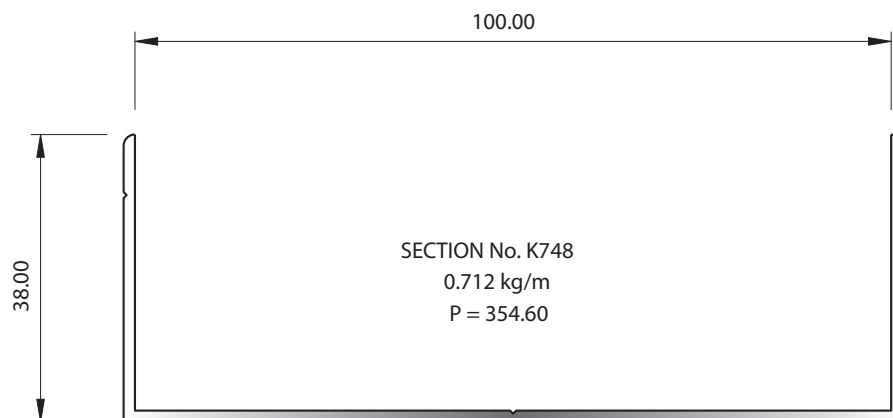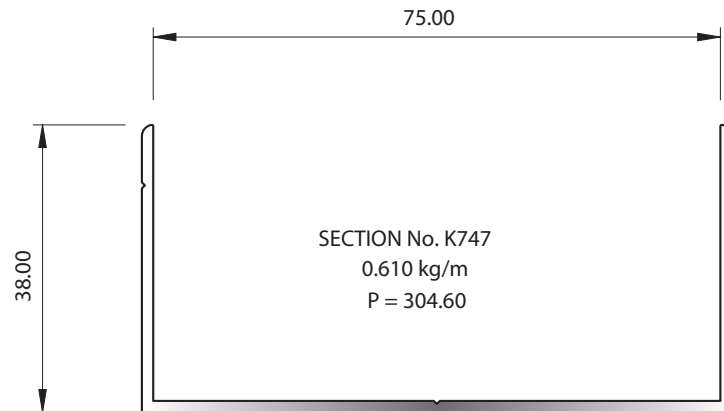

Coolstore and Annexes Group 2.2.7

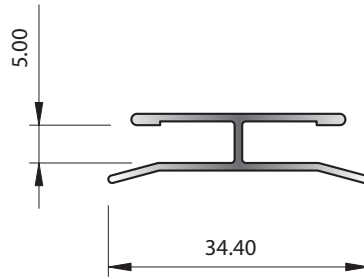

SECTION No. K809
0.195 kg/m
P = 138.30

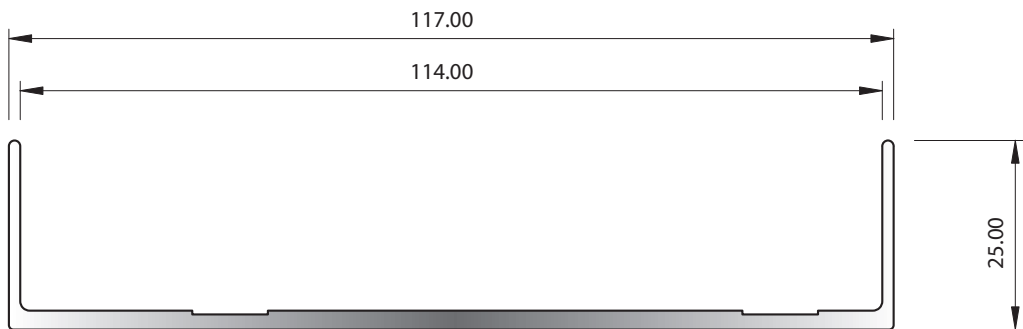


SECTION No. Z383
0.953 kg/m
P = 328.12




McKechnie®
Transforming Aluminium

Coolstore and Annexes Group 2.2.8

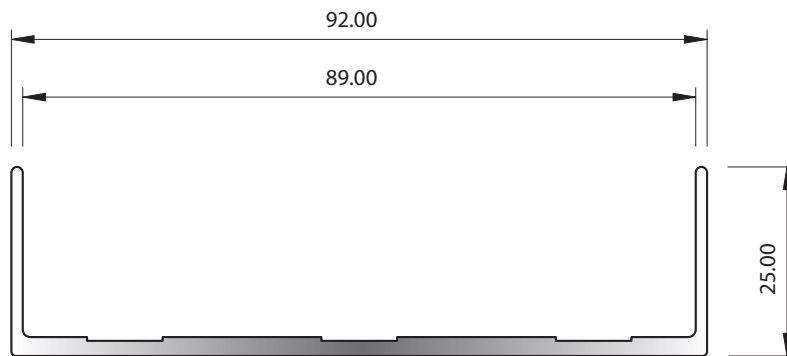

SECTION No. Z381*
0.769 kg/m
P = 279.34

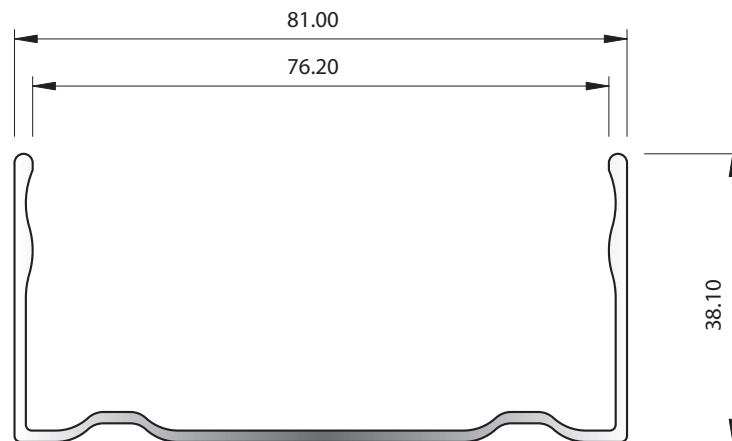


SECTION No. Z377
0.672 kg/m
P = 315.32

* SOME SPECIAL TOLERANCES APPLY

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.

Coolstore and Annexes Group 2.2.9



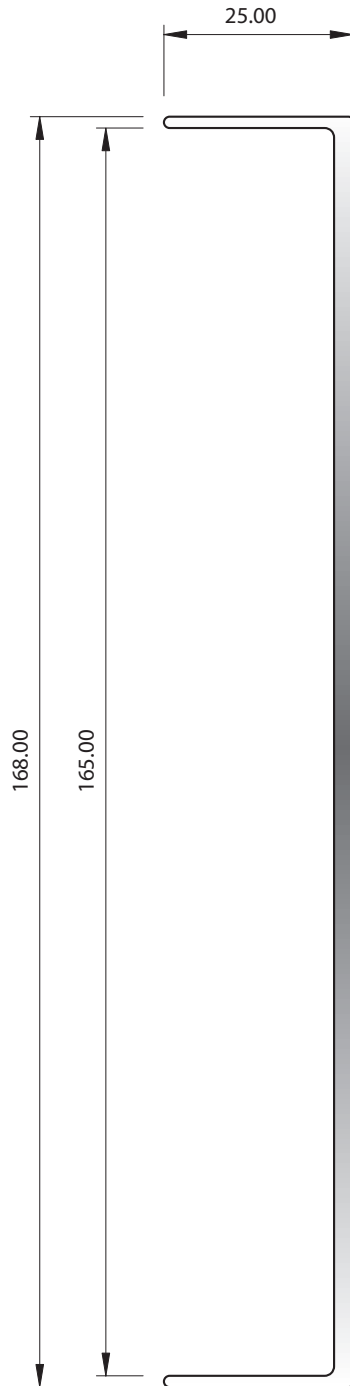


SECTION No. Z382
1.326 kg/m
P = 428.12




McKechnie®
Transforming Aluminium


Coolstore and Annexes Group 2.2.10

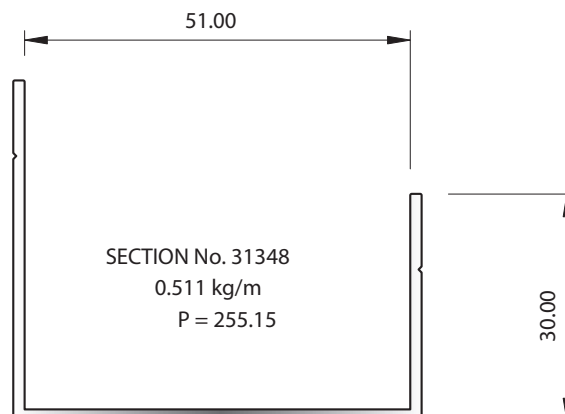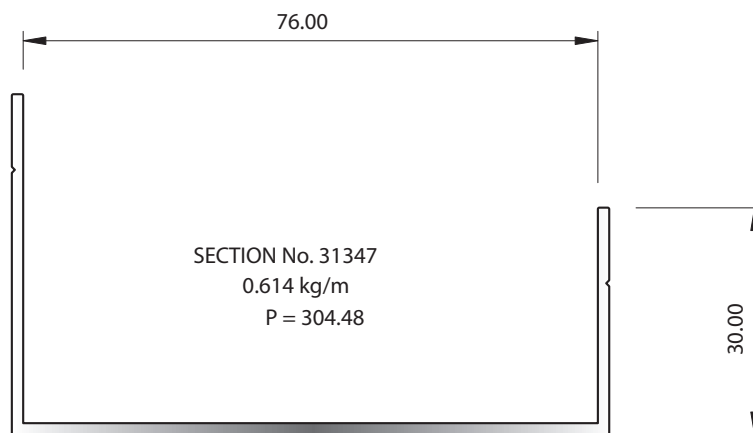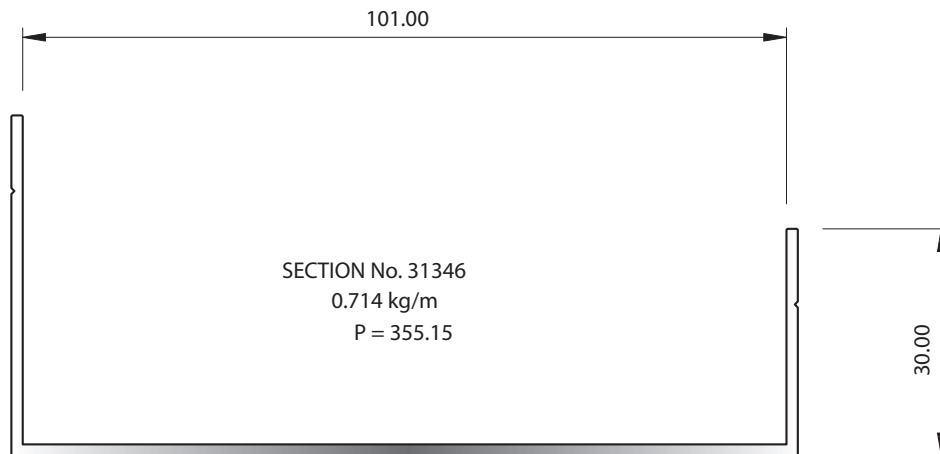

Glazing Bars Group 2.3.1



SECTION No. 8136
0.281 kg/m
P = 157

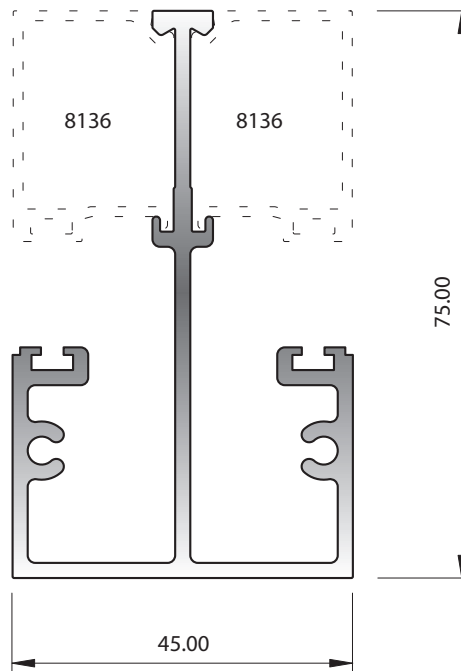


SECTION No. 8706
1.286 kg/m
P = 462.80





McKechnie®
Transforming Aluminium

Glazing Bars Group 2.3.2

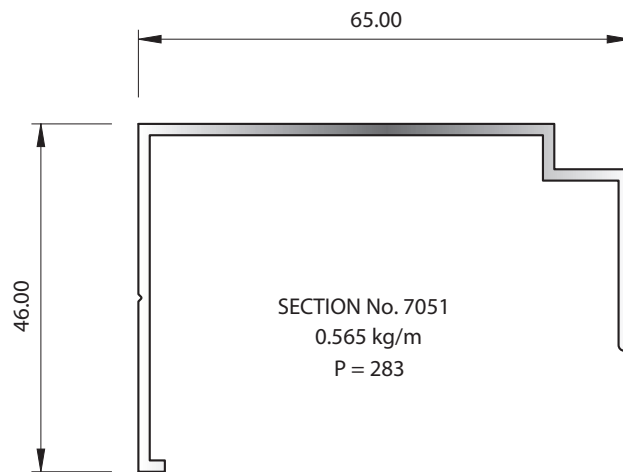


Louvre Blades Group 2.4.1

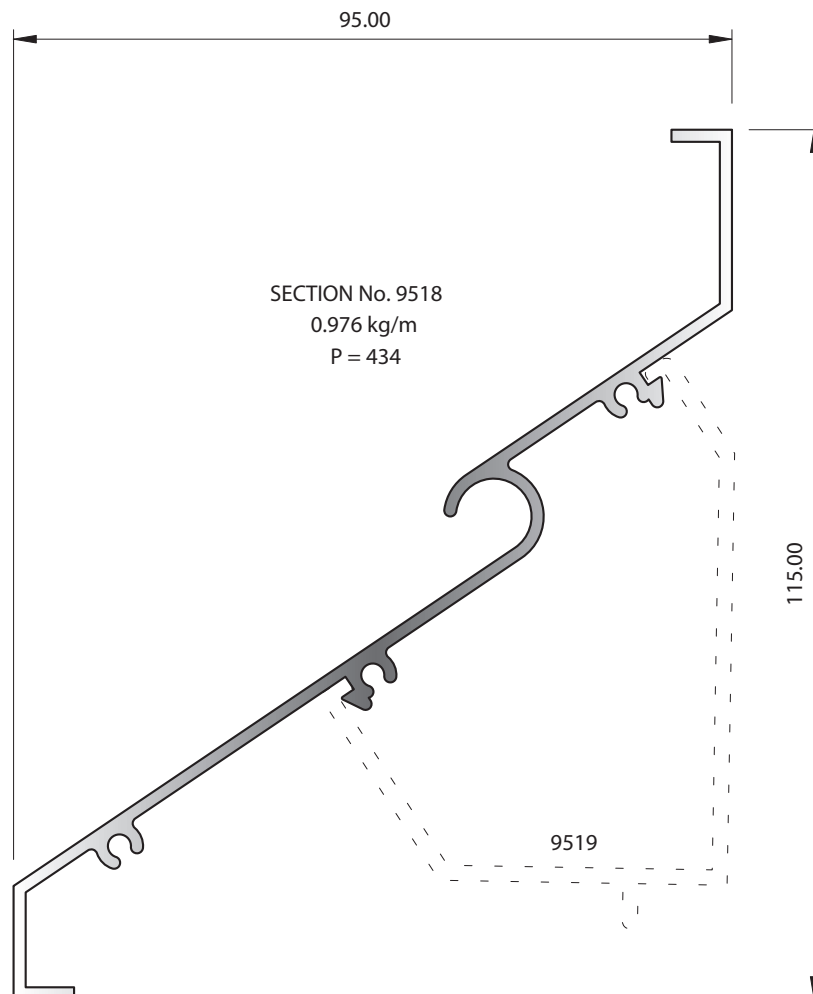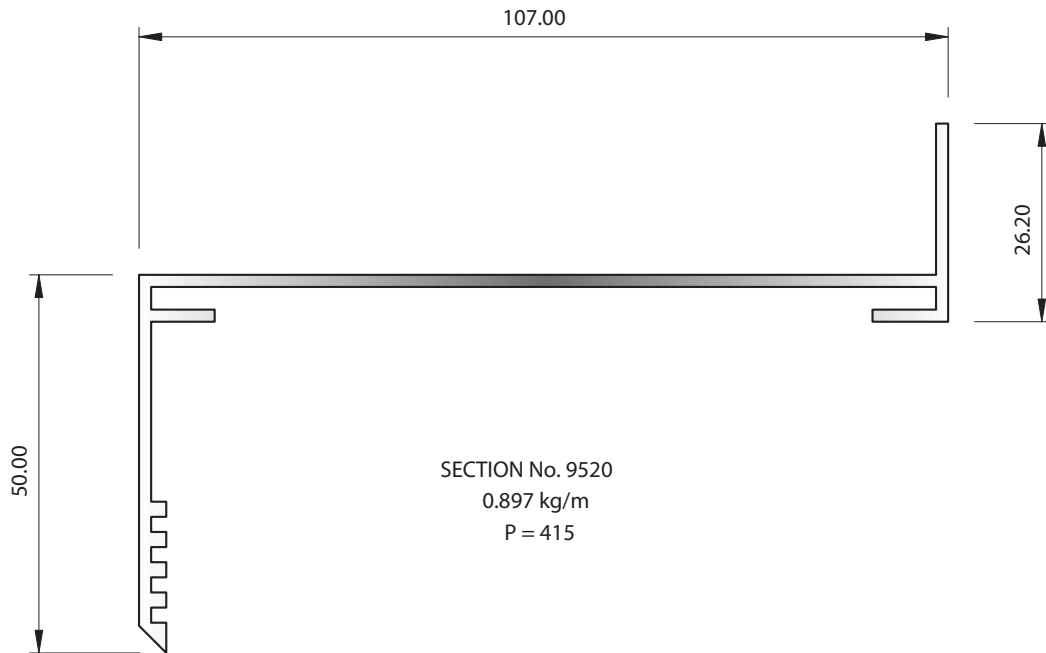





McKechnie®
Transforming Aluminium

Louvre Blades Group 2.4.2

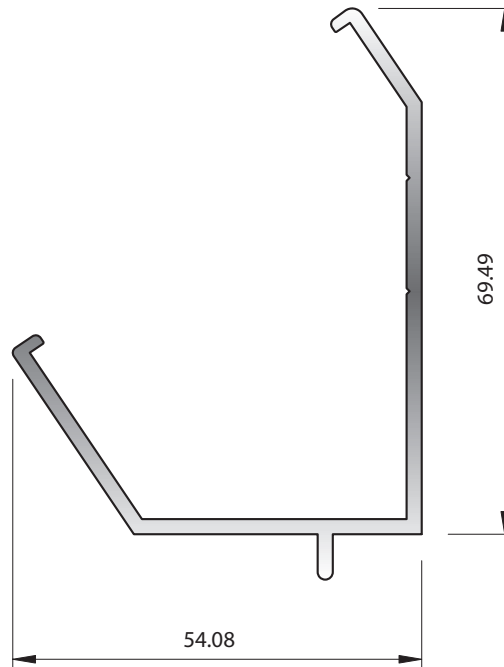

SECTION No. 9519
0.784 kg/m
P = 296



Louvre Blades Group 2.4.3

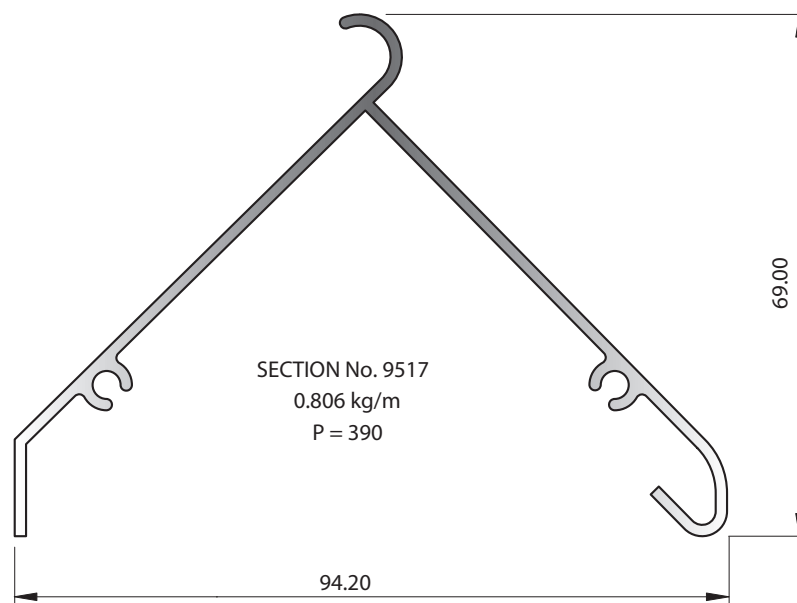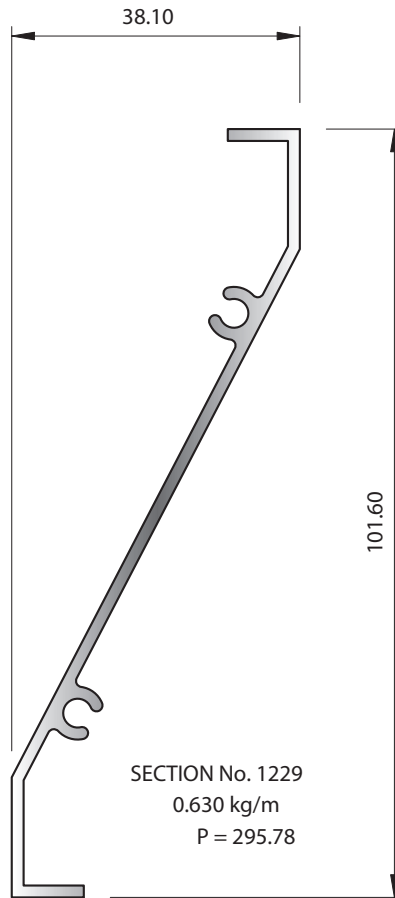



McKechnie®
Transforming Aluminium



Louvre Blades Group 2.4.4

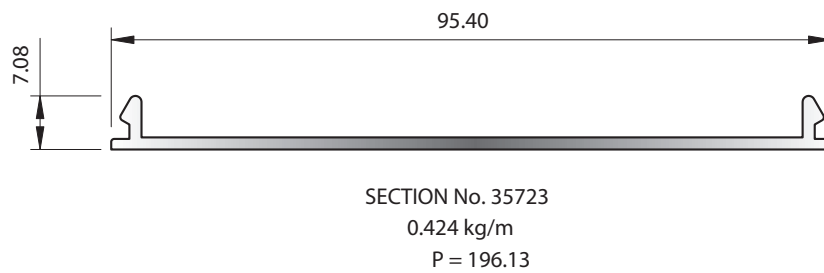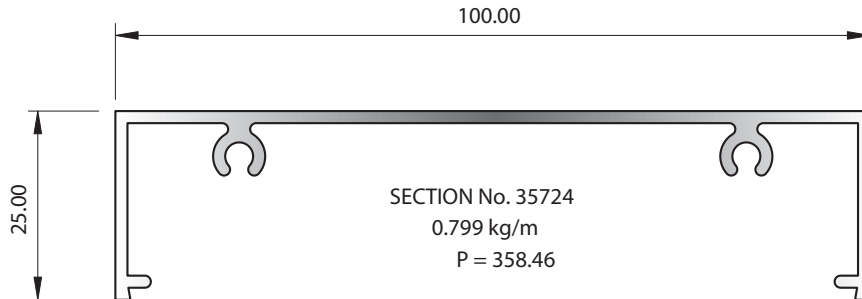



McKechnie®
Transforming Aluminium

Louvre Blades Group 2.4.5


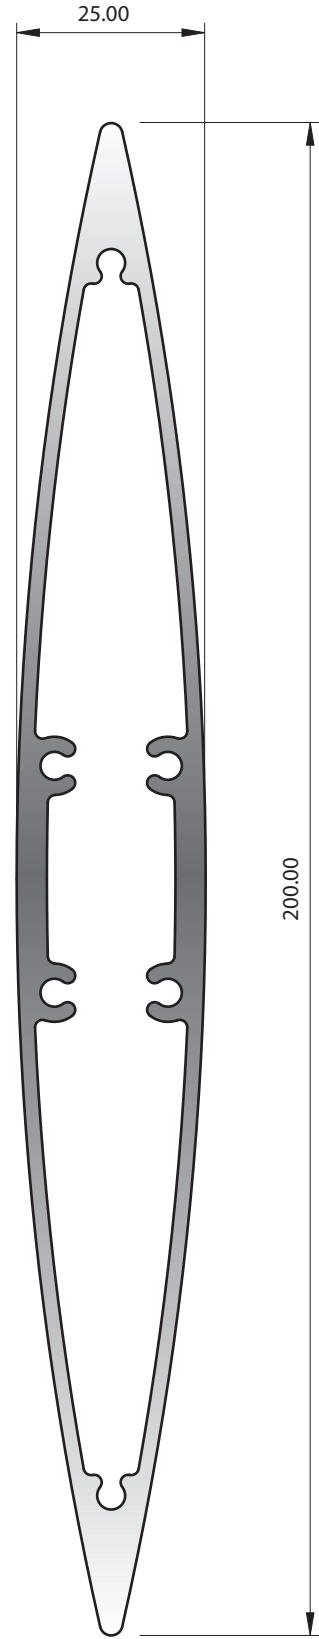
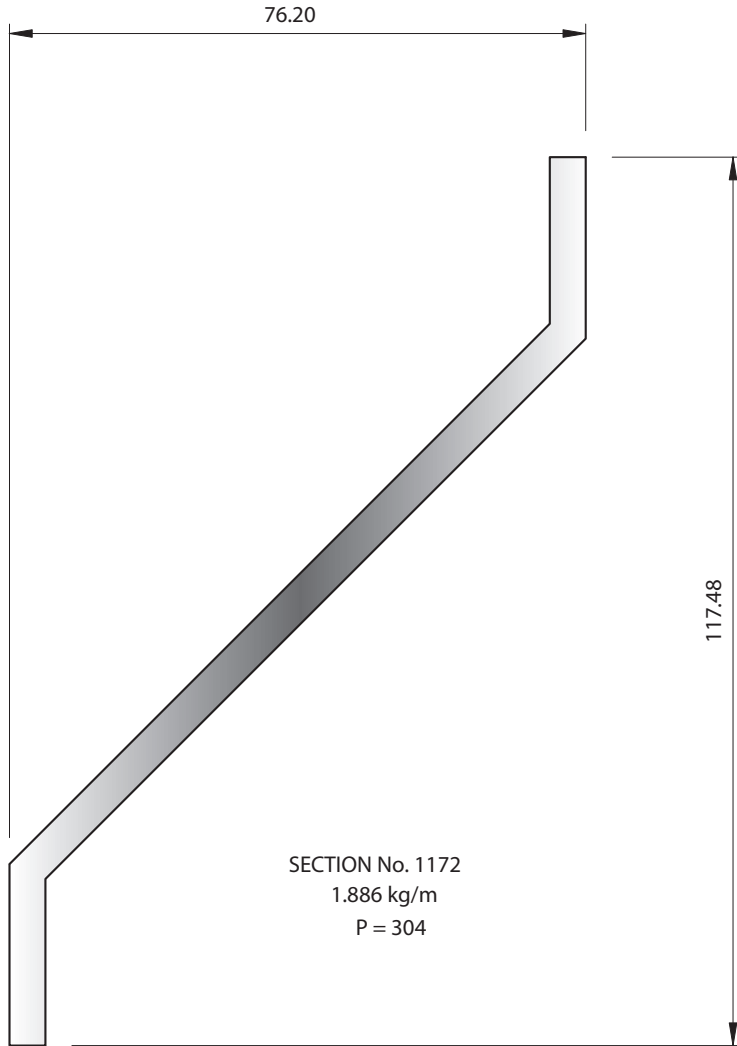


Louvre Blades Group 2.4.5



McKechnie®
Transforming Aluminium


Louvre Blades Group 2.4.6

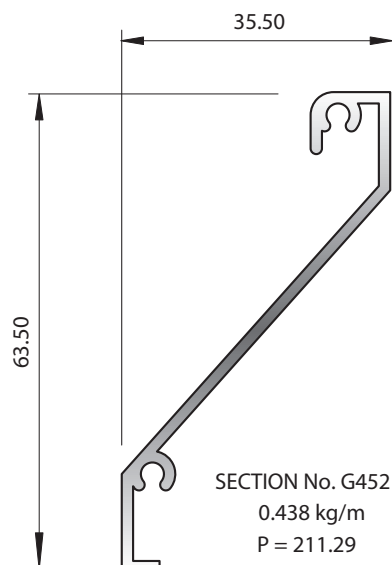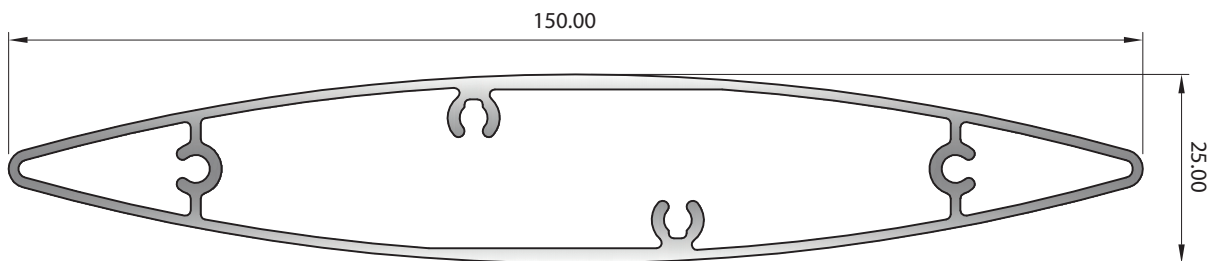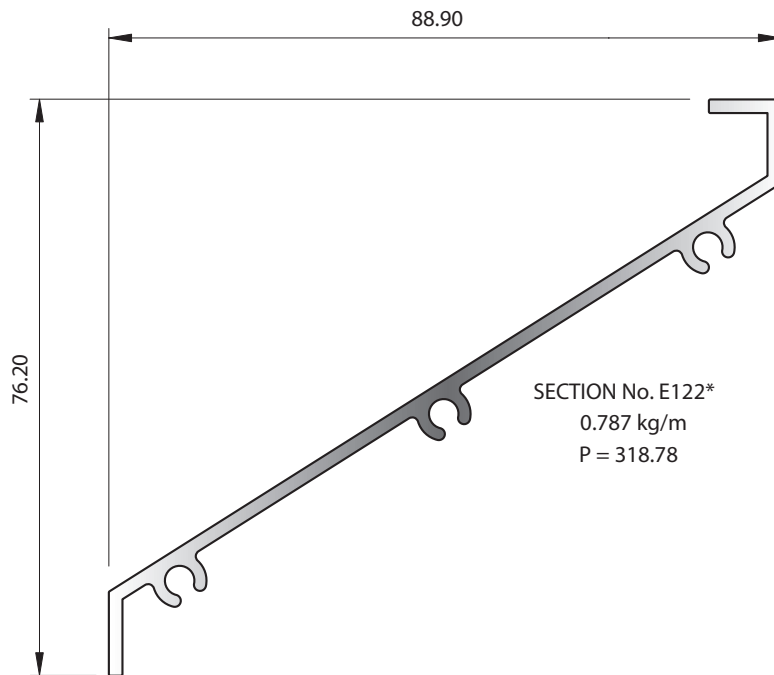


* SOME SPECIAL TOLERANCES APPLY

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.


Louvre Blades Group 2.4.7



SECTION No. X193
0.136 kg/m
P = 86.14

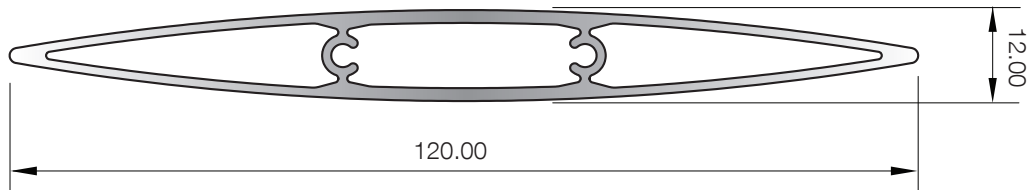

SECTION No. 34509
0.986 kg/m
P = 243.41

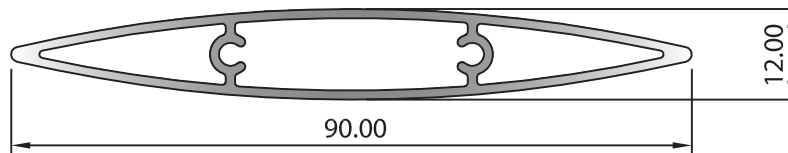


SECTION No. 32044
0.679 kg/m
P = 184




McKechnie®
Transforming Aluminium


Pacific 75 Series Shopfront Group 2.5.1 New Zealand Only

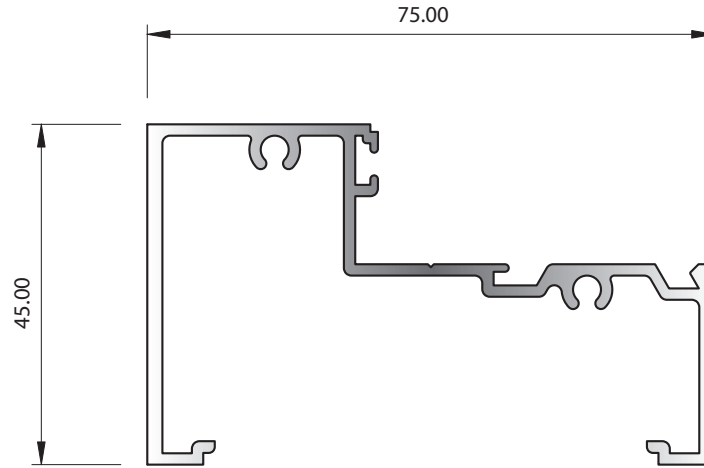


SECTION No. G083*
0.927 kg/m
P = 422.42




SECTION No. 8136
0.281 kg/m
P = 157

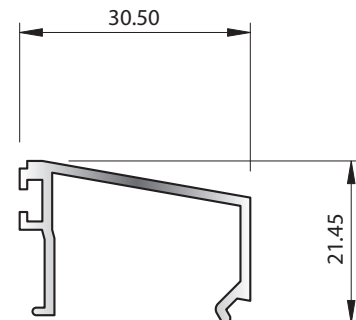

SECTION No. 7754
0.267 kg/m
P = 149.88

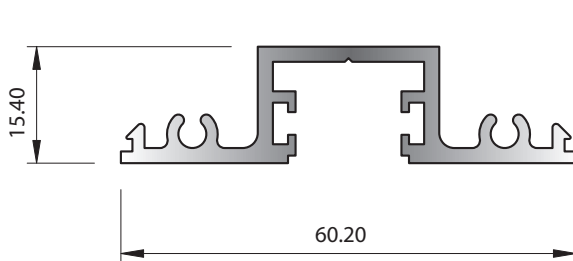

SECTION No. 9698
0.650 kg/m
P = 254



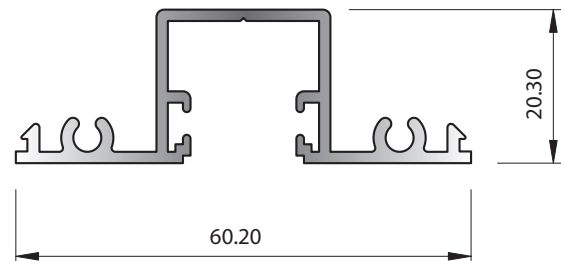


SECTION No. G062*
0.579 kg/m
P = 280.67
75/100 SERIES

* SOME SPECIAL TOLERANCES APPLY

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.

Pacific 75 Series Shopfront Group 2.5.2 New Zealand Only

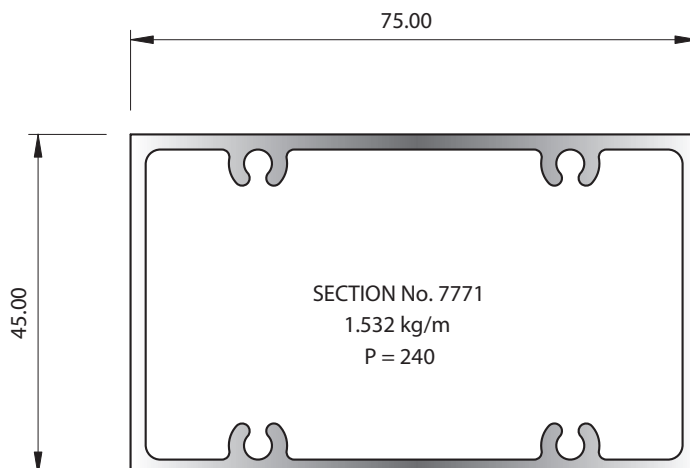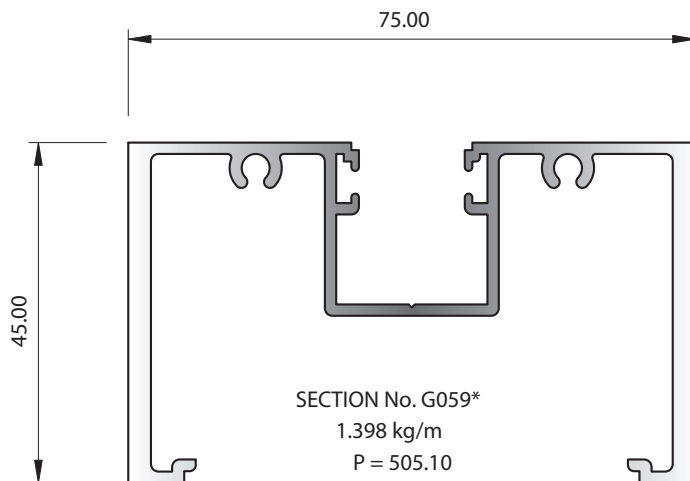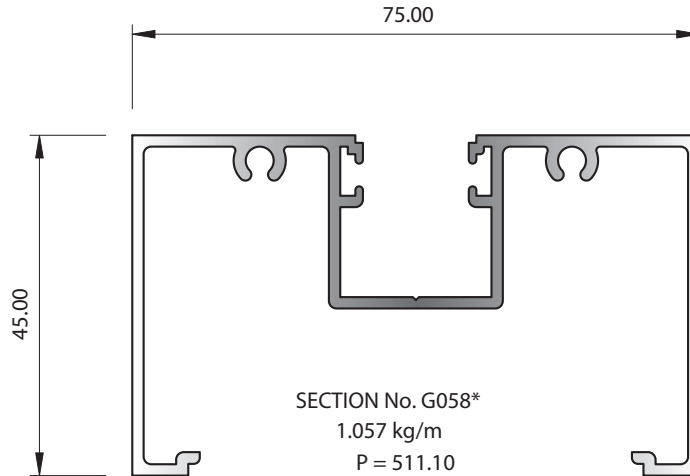



* SOME SPECIAL TOLERANCES APPLY

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.




McKechnie®
Transforming Aluminium


Pacific 75 Series Shopfront Group 2.5.3 New Zealand Only

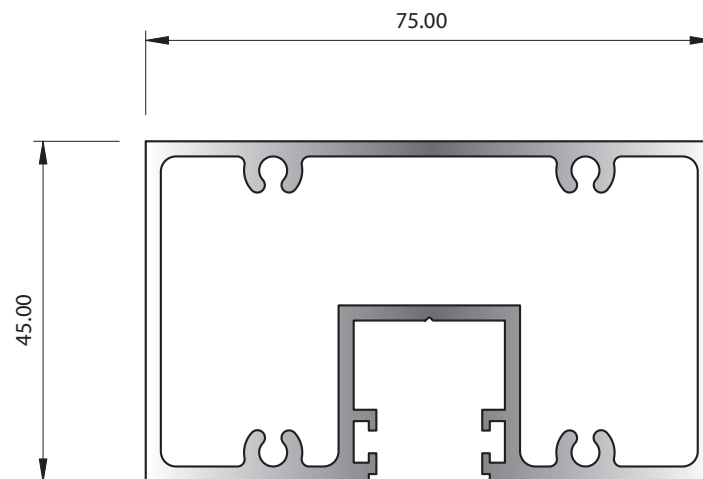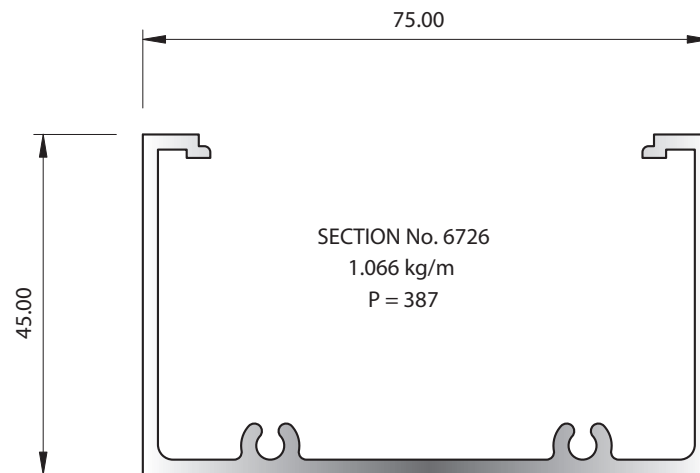

Pacific 75 Series Shopfront Group **2.5.4** New Zealand Only




SECTION No. 5706
0.126 kg/m
P = 77





McKechnie®
Transforming Aluminium

Pacific 75 Series Shopfront Group 2.5.5 New Zealand Only

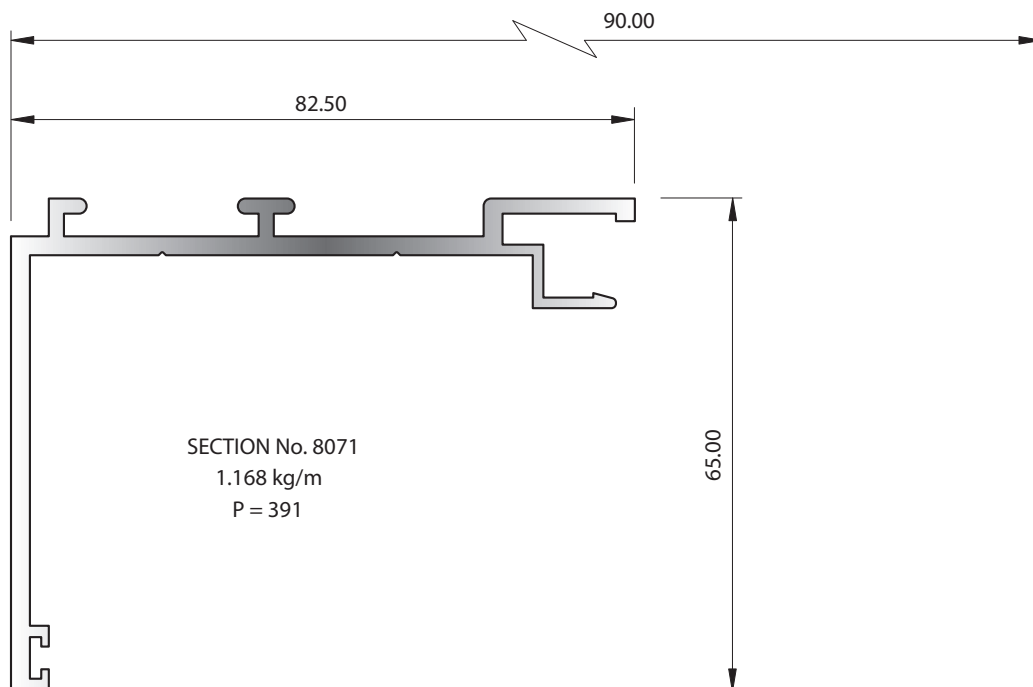




Pacific 75 Series Shopfront Group 2.5.6 New Zealand Only

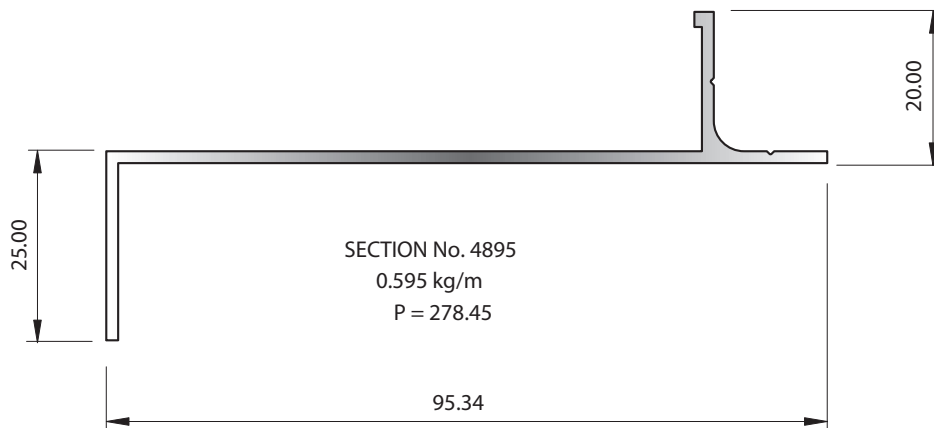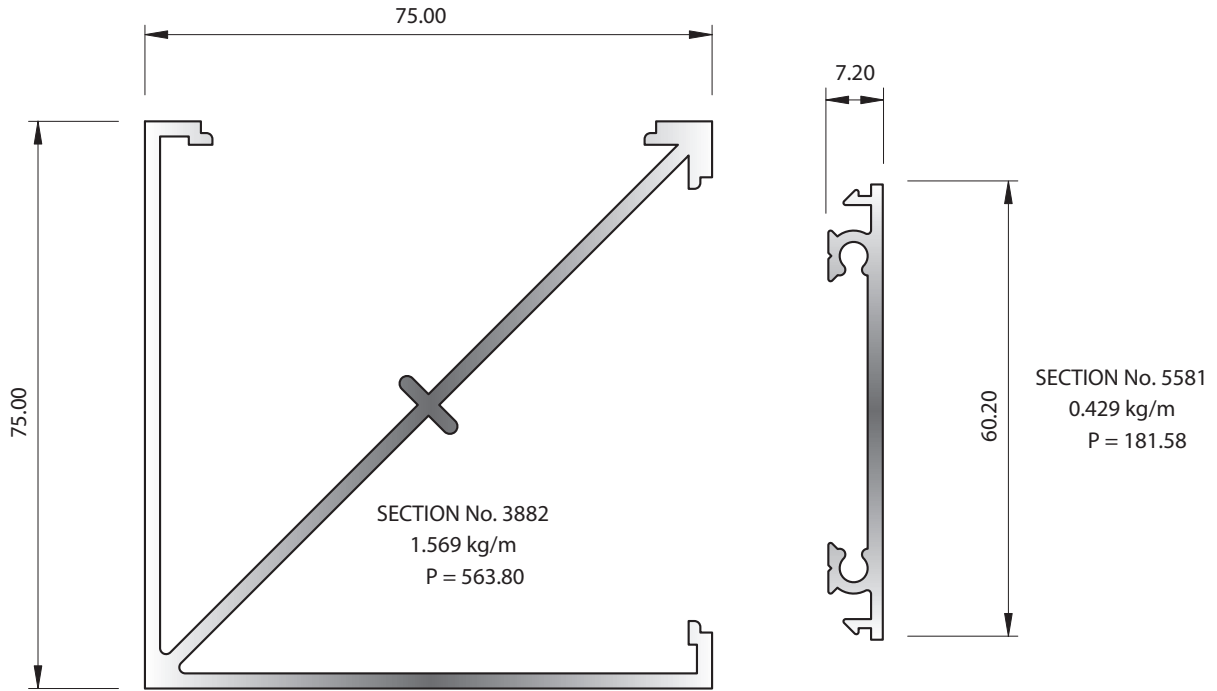



McKechnie®
Transforming Aluminium

Pacific 100 Series Shopfront Group 2.6.1 New Zealand Only

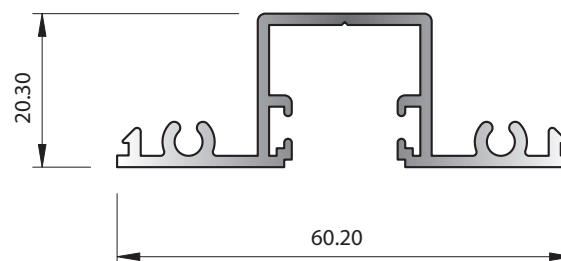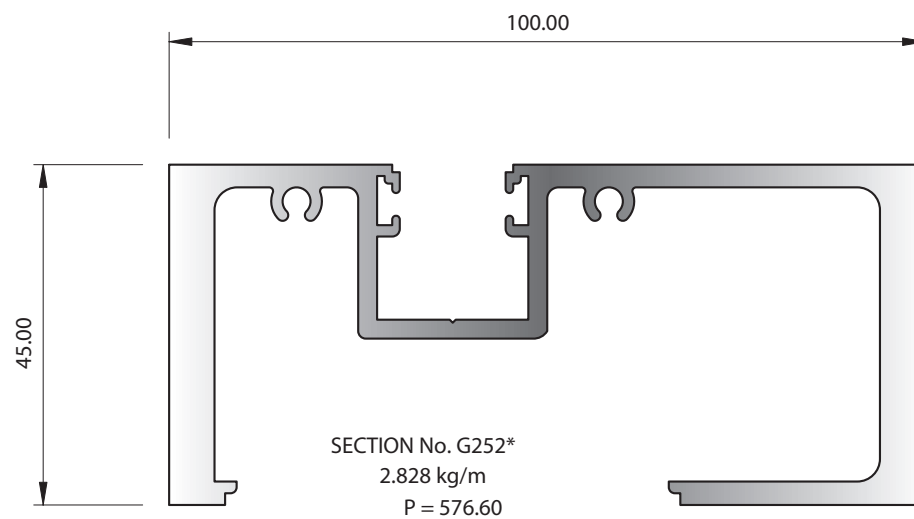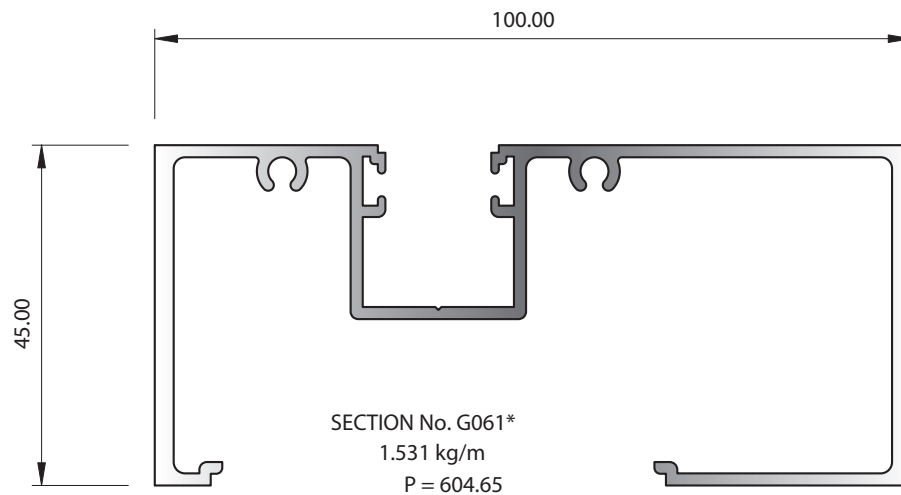






* SOME SPECIAL TOLERANCES APPLY

75/100 SERIES

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.

Pacific 100 Series Shopfront Group 2.6.2

New Zealand Only

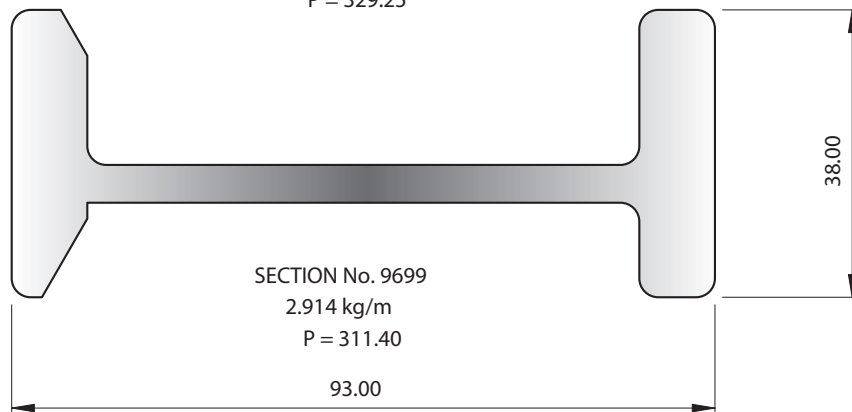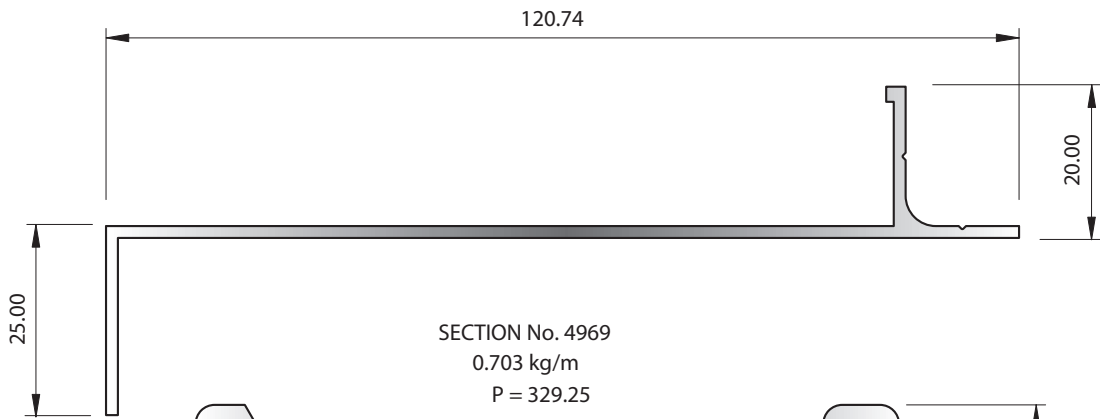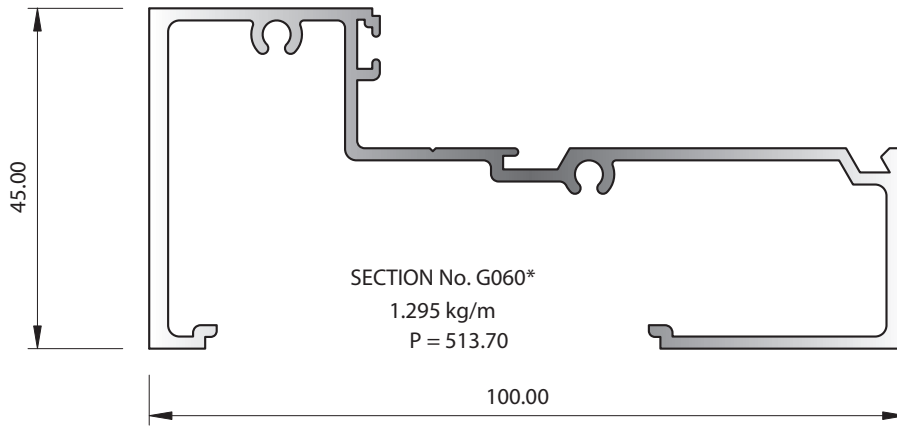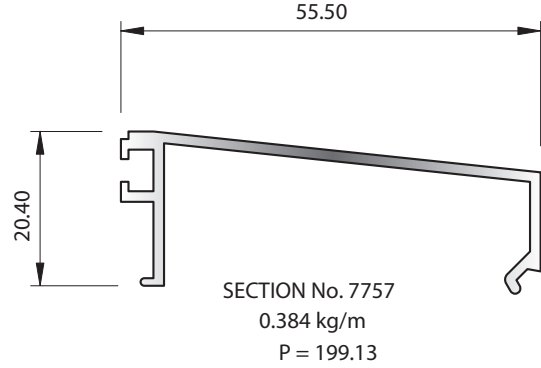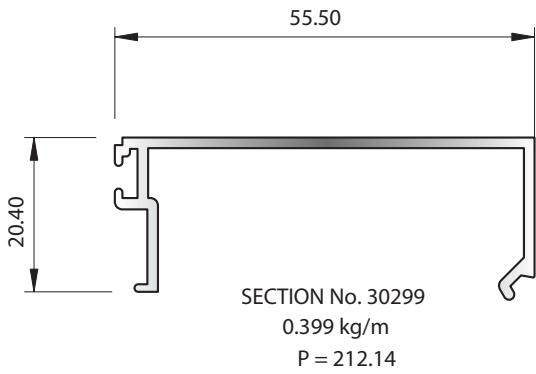


* SOME SPECIAL TOLERANCES APPLY




McKechnie®
Transforming Aluminium

Pacific 100 Series Shopfront Group 2.6.3 New Zealand Only

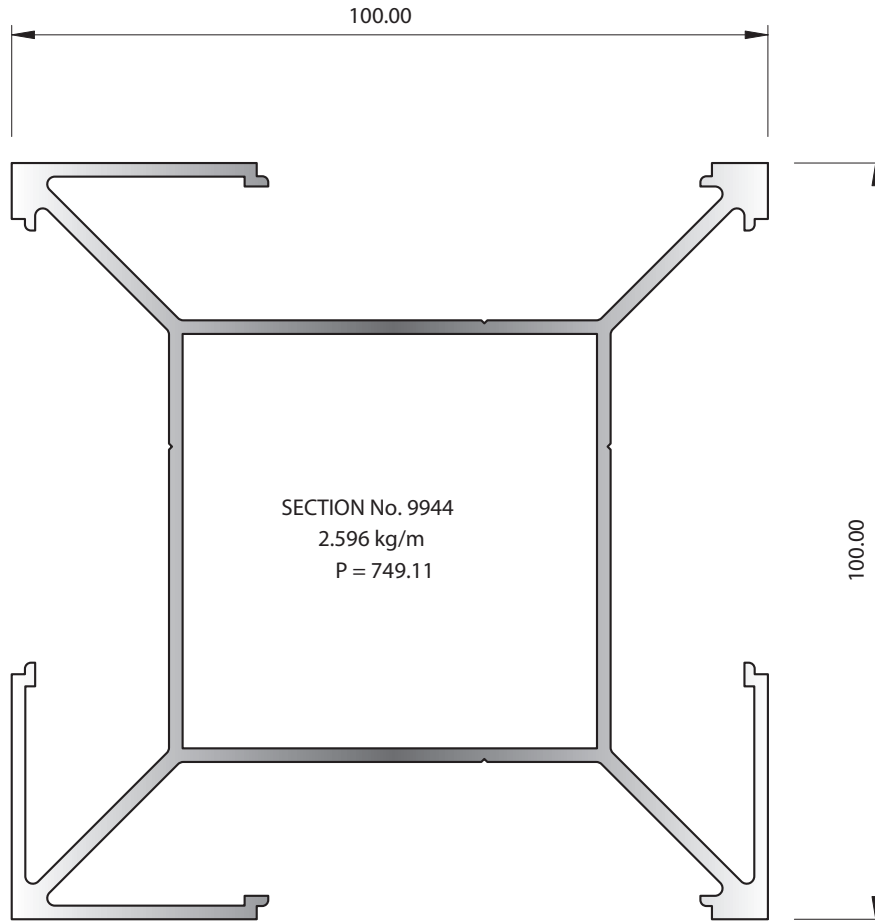


Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.


Pacific 100 Series Shopfront Group 2.6.4 New Zealand Only

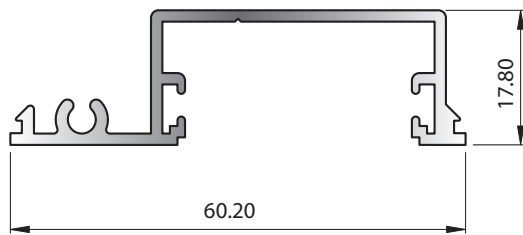


SECTION No. 30771
0.511 kg/m
P = 247.49

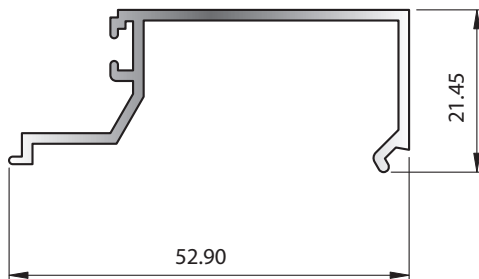

SECTION No. 30772
0.380 kg/m
P = 202.94

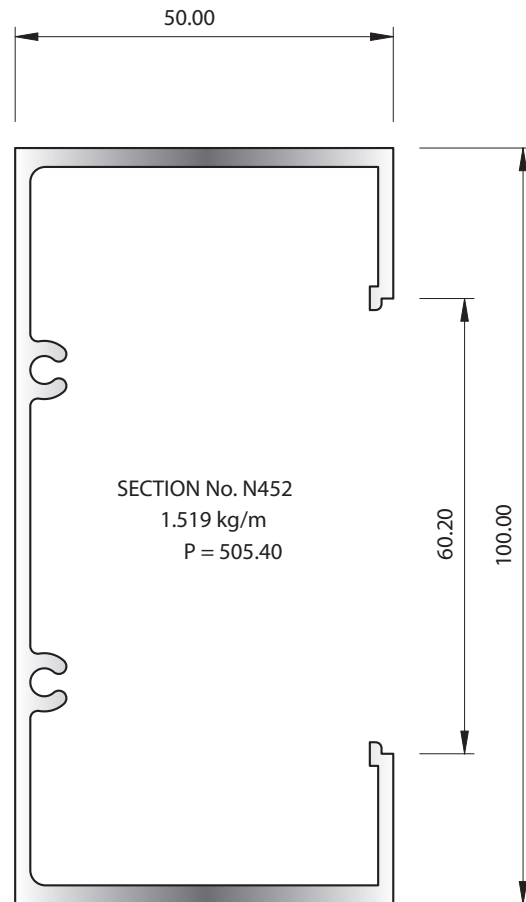







SECTION No. N452
1.519 kg/m
P = 505.40



McKechnie®
Transforming Aluminium


Pacific Commercial Door Suite Group 2.7.1

New Zealand Only

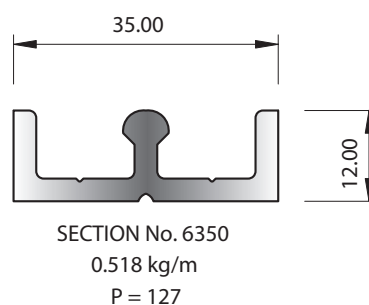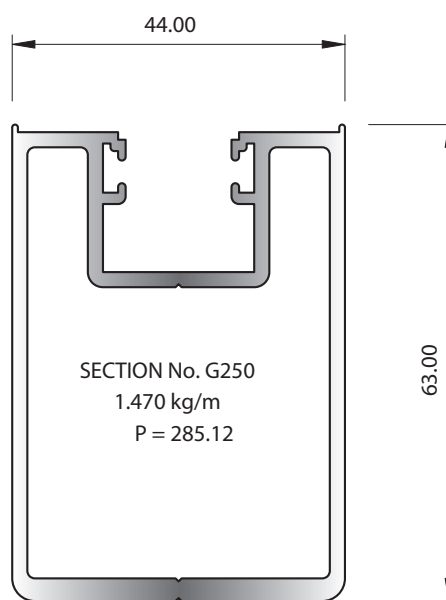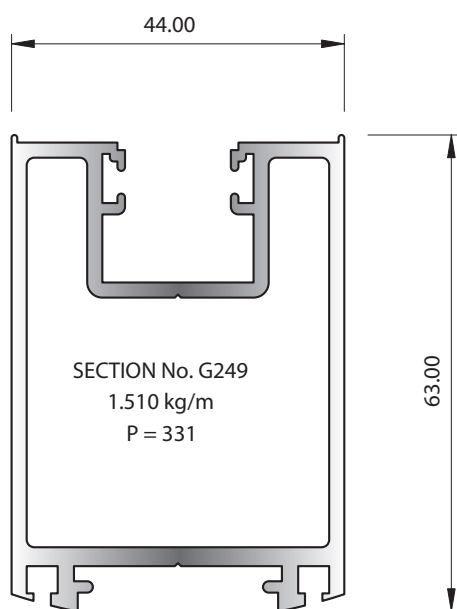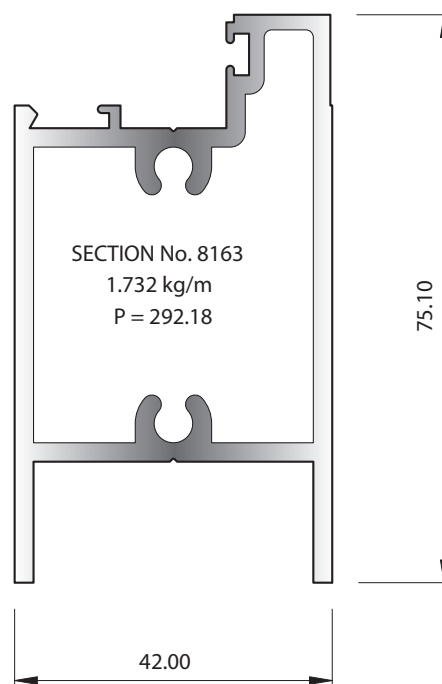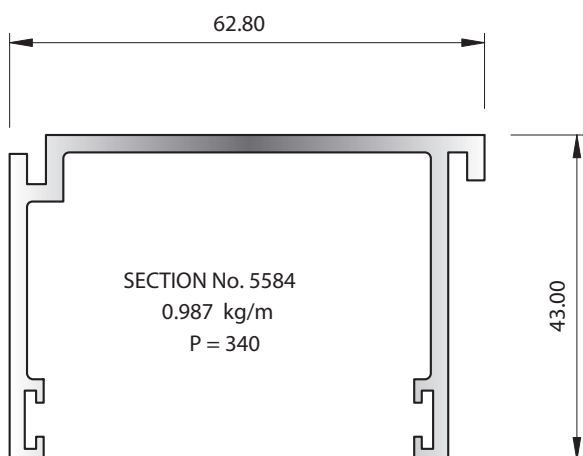

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.

Pacific Commercial Door Suite Group 2.7.2 New Zealand Only

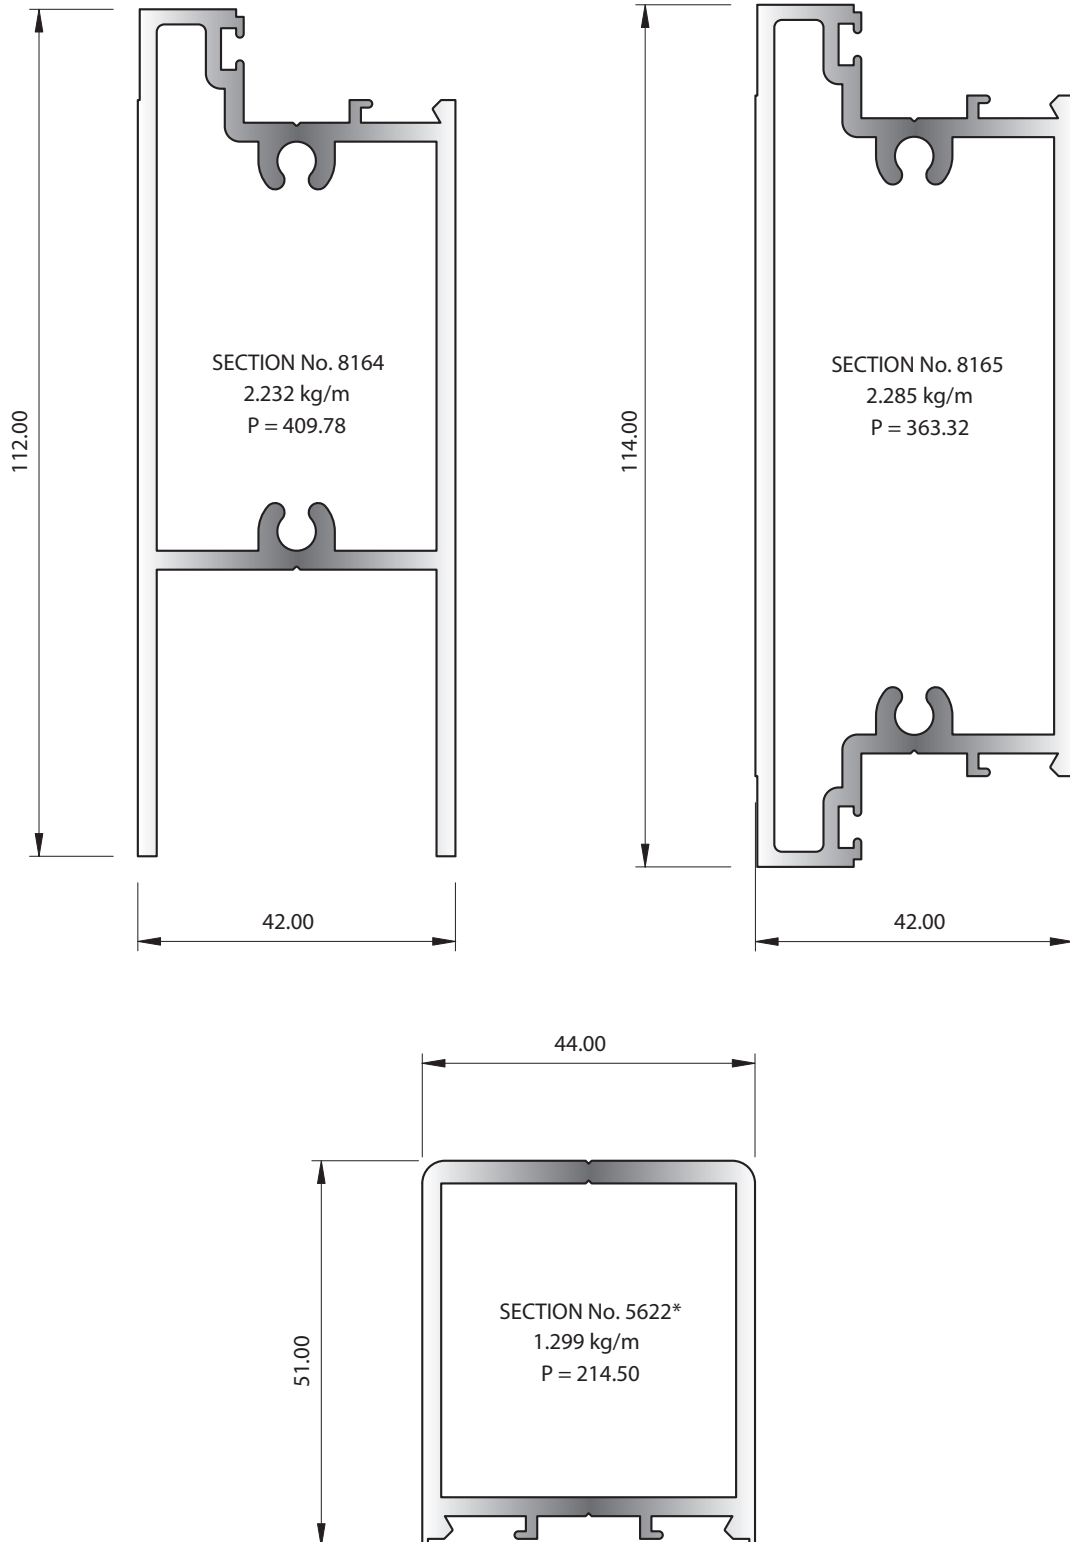


* SOME SPECIAL TOLERANCES APPLY




McKechnie®
Transforming Aluminium


Pacific Commercial Door Suite Group 2.7.3 New Zealand Only




SECTION No. 6136
0.150 kg/m
P = 72.23




SECTION No. 5653
0.166 kg/m
P = 97.50

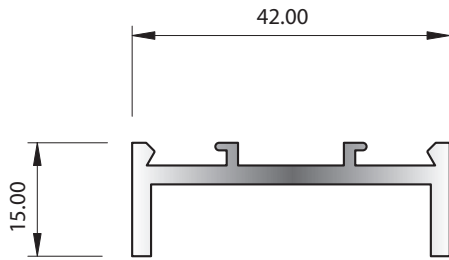


SECTION No. 5620
0.484 kg/m
P = 157.03



SECTION No. 35647
0.250 kg/m
P = 118.13

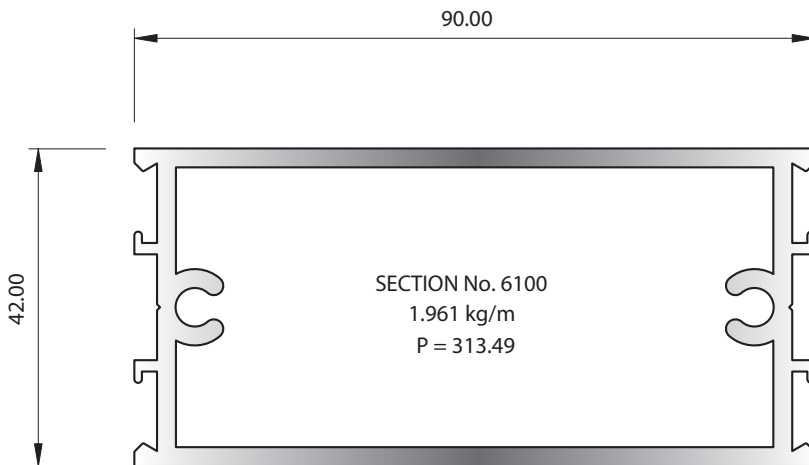

SECTION No. 6100
1.961 kg/m
P = 313.49

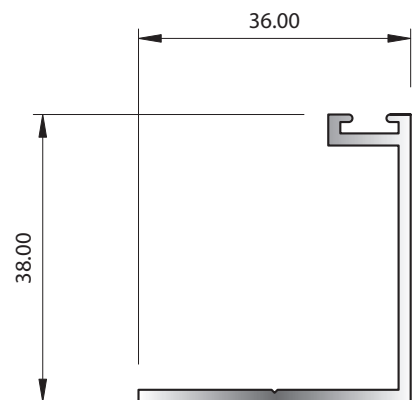




SECTION No. 33445
0.373 kg/m
P = 177.47

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.




McKechnie®
Transforming Aluminium

Pacific Commercial Door Suite Group 2.7.4 New Zealand Only

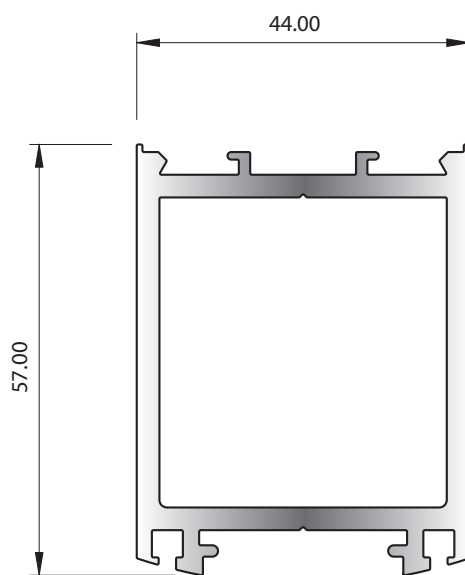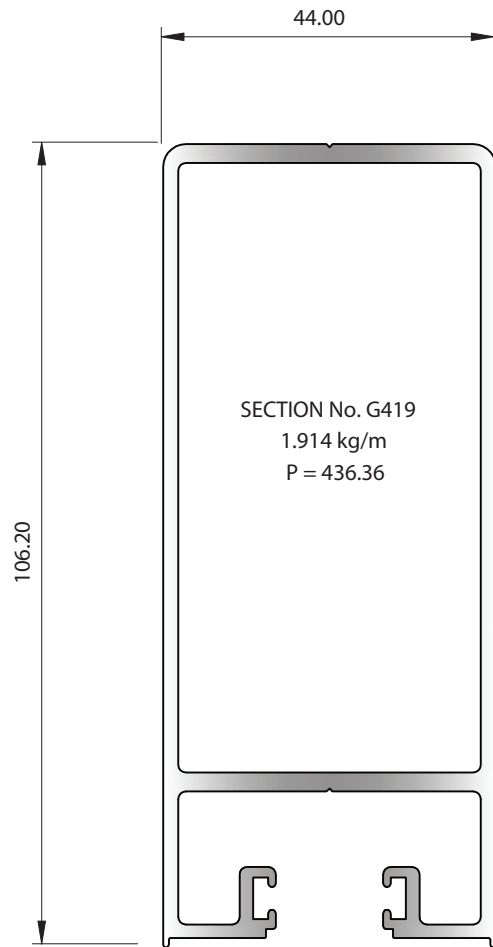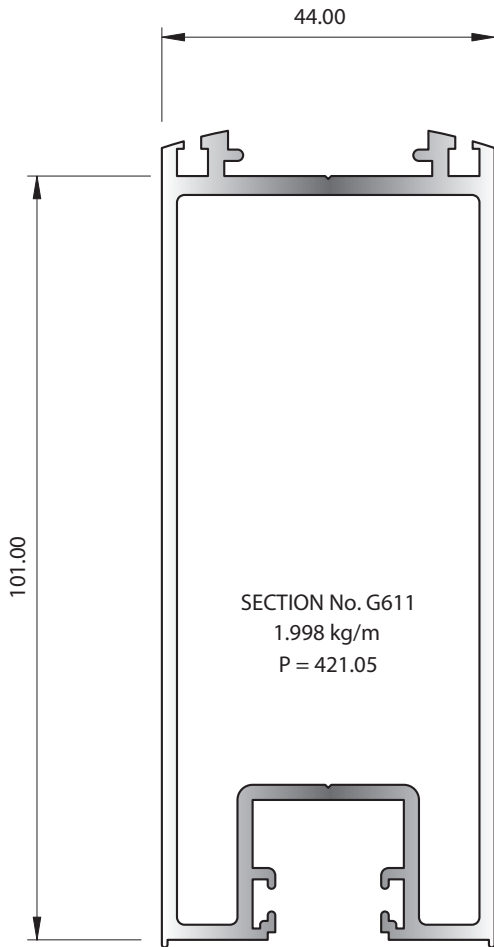


SECTION No. 9987
1.617 kg/m
P = 268.10

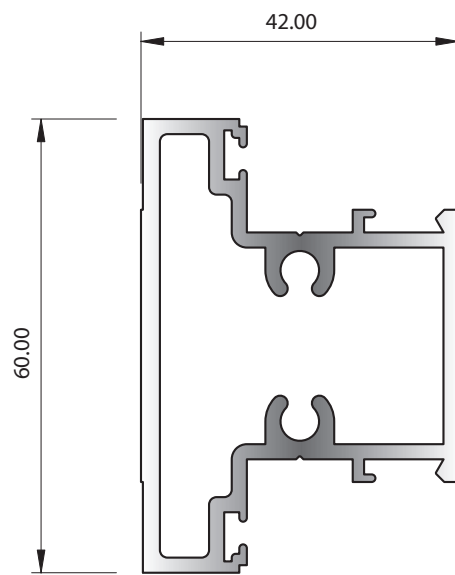

SECTION No. G251
1.400 kg/m
P = 484.40


* SOME SPECIAL TOLERANCES APPLY

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.




McKechnie®
Transforming Aluminium


Pacific Commercial Door Suite Group 2.7.5 New Zealand Only

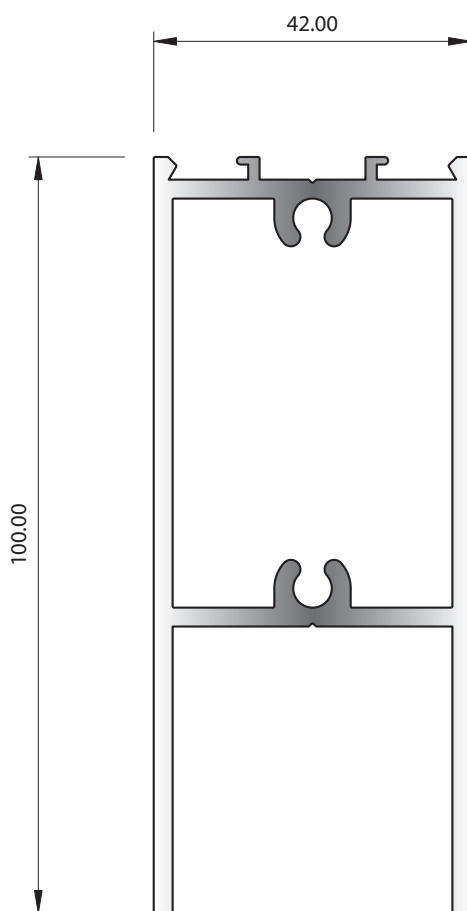

SECTION No. 31882
2.072 kg/m
P = 384.15

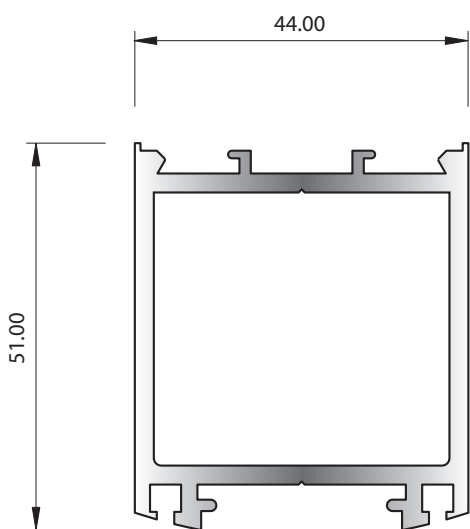


SECTION No. 8166
1.325 kg/m
P = 260.46

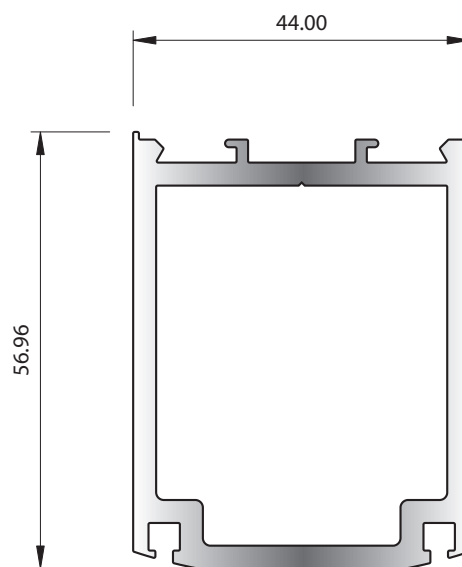


SECTION No. 33143
1.626 kg/m
P = 247.85

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.


Commercial Shopfront Group 2.8.1 Australia Only

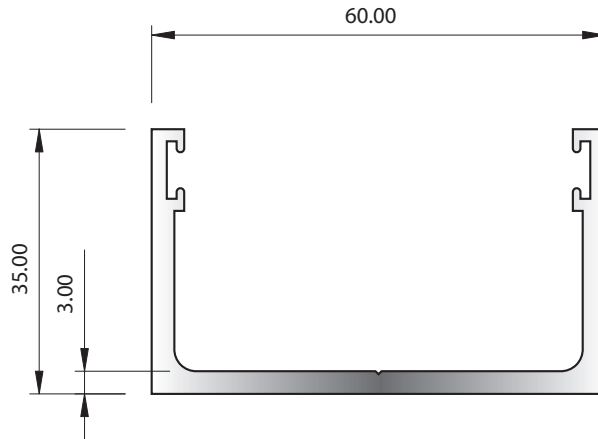

SECTION No. J650
1.013 kg/m
P = 275.64

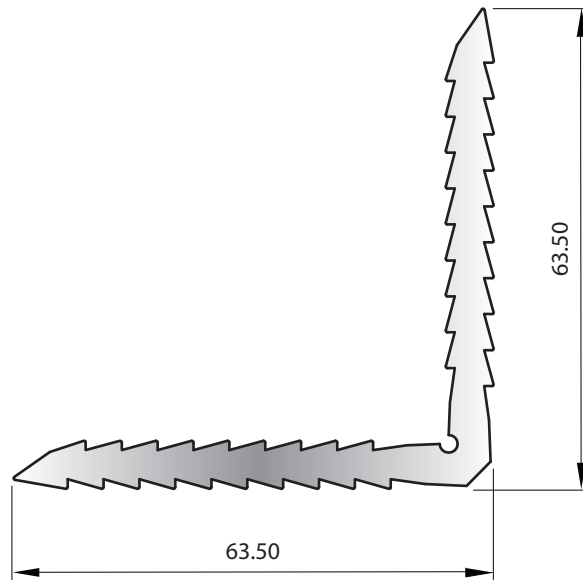


SECTION No. 9126
1.582 kg/m
P = 296




McKechnie®
Transforming Aluminium


Thresholds Group 2.10.1

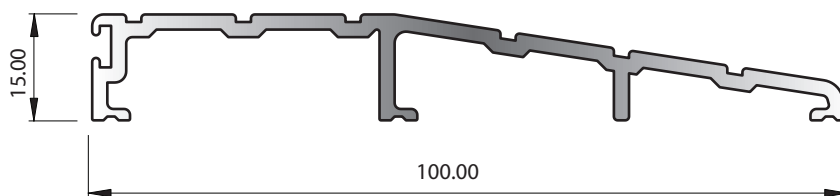


SECTION No. 34050
0.809 kg/m
P = 304.98

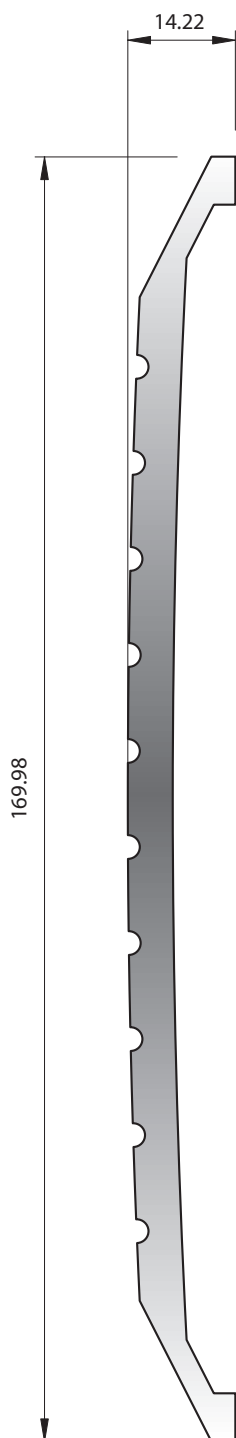

SECTION No. 0750
2.458 kg/m
P = 376

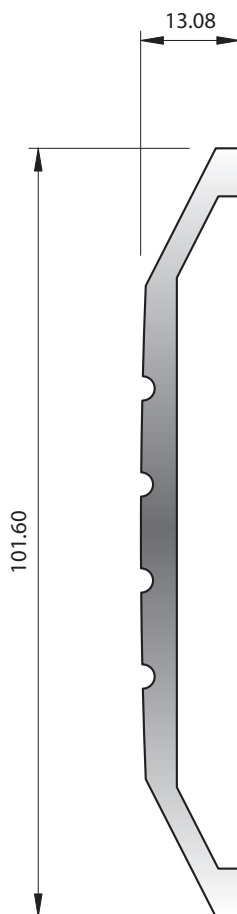

SECTION No. 0749
1.171 kg/m
P = 229

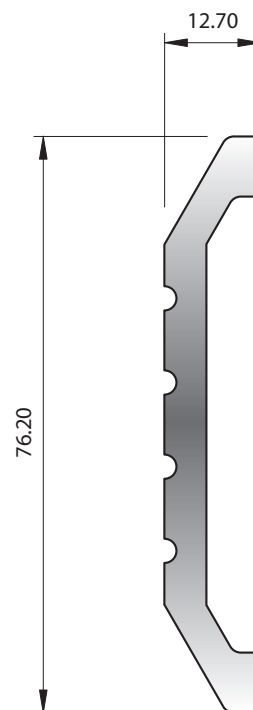

SECTION No. 0732
1.154 kg/m
P = 181

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.





McKechnie®
Transforming Aluminium

Head Flashings and Sill Pans Group 2.11.1

SECTION NO	"XX"	MASS kg/m	OUTSIDE PERM
35360	10.00	0.281	183.89
35361	15.00	0.298	194.38
35362	20.00	0.315	204.74
35363	25.00	0.332	215.09
35364	30.00	0.348	225.44
35365	35.00	0.379	235.87
35366	40.00	0.397	246.26
35300	45.00	0.429	256.70
35301	50.00	0.448	267.05
35302	55.00	0.464	275.46
35484	60.00	0.484	287.75
35367	65.00	0.530	290.81
35368	70.00	0.557	308.24
35369	75.00	0.578	319.01
36814	80.00	0.597	329.36
37069	85.00	0.617	339.71
37070	90.00	0.637	350.07
37080	95.00	0.704	360.51

SECTION NO	"XX"	MASS kg/m	OUTSIDE PERM
35303	66.00	0.495	251.13
35962	84.00	0.568	287.13
35432	105.30	0.694	329.92
37724	119.10	0.754	357.52

SECTION NO	MASS kg/m	OUTSIDE PERM
50212	0.525	172.96
50285	0.552	209.91
34461B	0.424	220.47

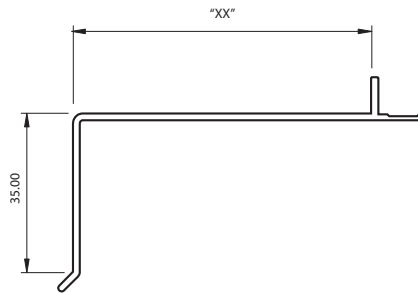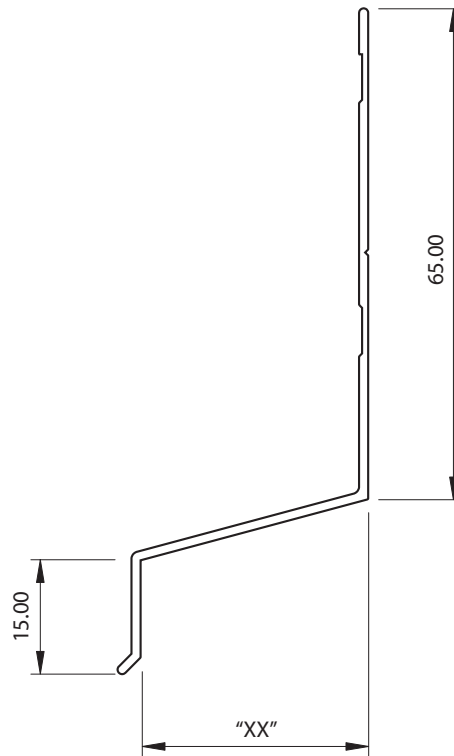




Building Interior


McKechnie®
Transforming Aluminium






McKechnie®
Transforming Aluminium

Sliding Door and Wardrobe Sections Group 3.3.1

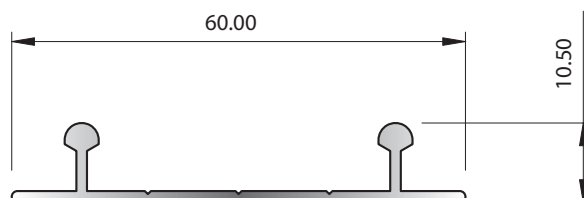


SECTION No. J657
0.352 kg/m
P = 146.62


Sliding Door and Wardrobe Sections Group 3.3.2

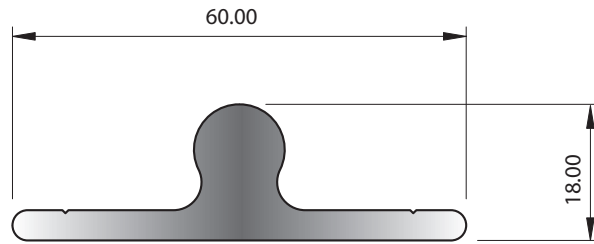

SECTION No. N999
1.039 kg/m
P = 147.20



SECTION No. N043
0.093 kg/m
P = 52.26




SECTION No. 6856
0.143 kg/m
P = 48




McKechnie®
Transforming Aluminium

Stair Treads and Nosings Group 3.4.1

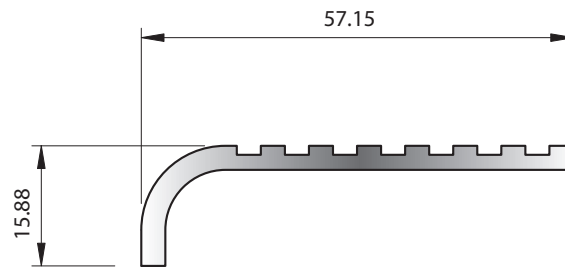


SECTION No. 0360
0.493 kg/m
P = 155

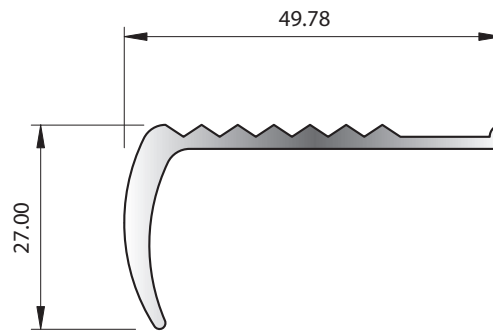


SECTION No. 0733
0.489 kg/m
P = 152.94


Trims and Mouldings Group 3.5.1

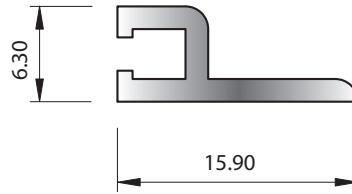

SECTION No. 9051
2 x ACTUAL SIZE
0.102 kg/m
P = 54

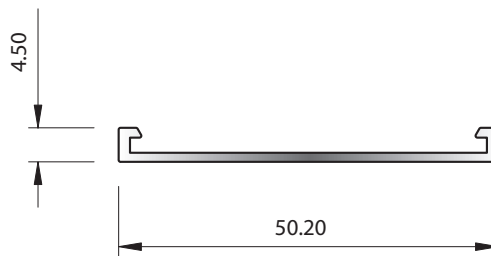

SECTION No. G338*
0.201 kg/m
P = 121.67




SECTION No. 37028
0.178 kg/m
P = 73.52

* SOME SPECIAL TOLERANCES APPLY




McKechnie®
Transforming Aluminium


Trims and Mouldings Group 3.5.2




SECTION No. 1100
0.124 kg/m
P = 50




SECTION No. 8966
0.143 kg/m
P = 47.70



SECTION No. K731
0.292 kg/m
P = 70.90



SECTION No. K732
0.132 kg/m
P = 68.80




SECTION No. J059
0.157 kg/m
P = 82.90




McKechnie®
Transforming Aluminium

Trims and Mouldings Group 3.5.3

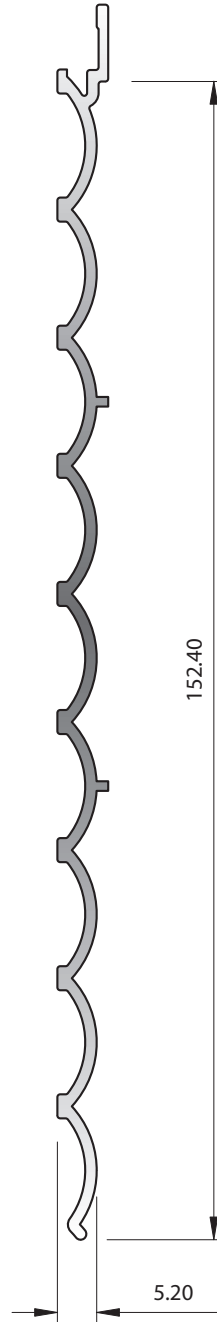

SECTION No. 3688
0.811 kg/m
P = 389

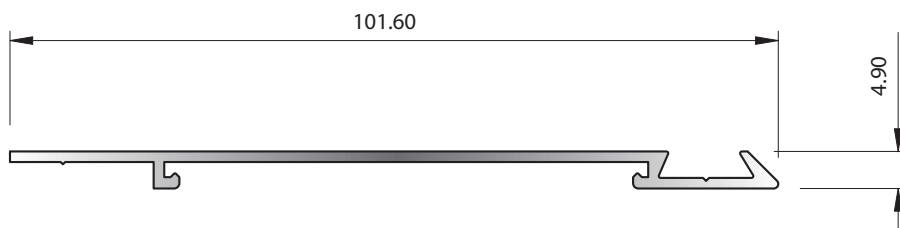

SECTION No. J395*
0.452 kg/m
P = 236.40


* SOME SPECIAL TOLERANCES APPLY

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.




McKechnie®
Transforming Aluminium


Wallboard Joints Group 3.6.1



SECTION No. 1826
0.091 kg/m
P = 68.19




SECTION No. 5386
0.134 kg/m
P = 84




SECTION No. 0785
0.153 kg/m
P = 90


Wallboard Joints Group 3.6.2



SECTION No. K607*
0.226 kg/m
P = 141.20



SECTION No. K080
0.176 kg/m
P = 134.94

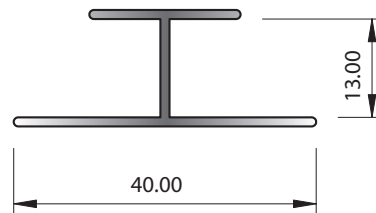


SECTION No. 6864
0.235 kg/m
P = 146

* SOME SPECIAL TOLERANCES APPLY




McKechnie®
Transforming Aluminium


Internal Glazing 3.7.1 & Partition Posts 3.8.1

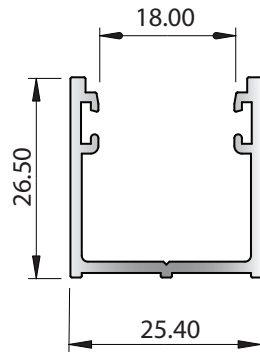


SECTION No. 33602
0.353 kg/m
P = 178.41

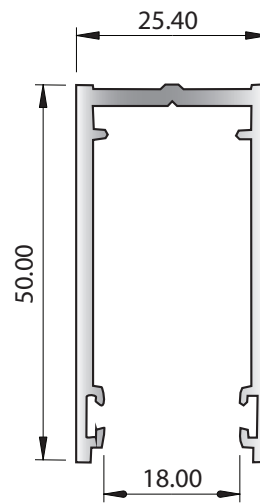

SECTION No. 33604
0.742 kg/m
P = 275.99

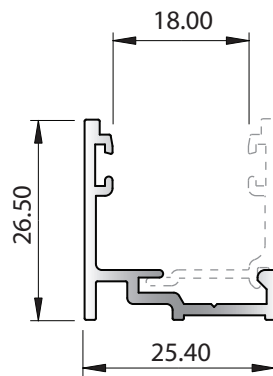

SECTION No. 33603
0.278 kg/m
P = 141.75



SECTION No. 33605
0.160 kg/m
P = 91.28



McKechnie®
Transforming Aluminium


Security






McKechnie®
Transforming Aluminium


Security Doors and Windows Group 4.1.1

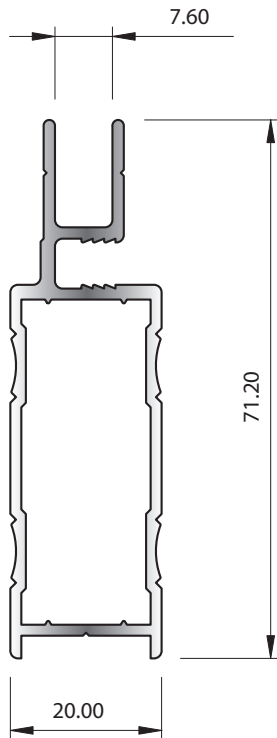


SECTION No. Z785*
ACCEPTS STAKING ANGLE 6868
0.749 kg/m
P = 240.25

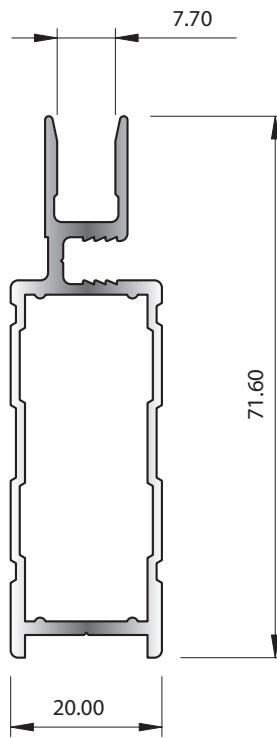


SECTION No. Z340*
0.751 kg/m
P = 240.51

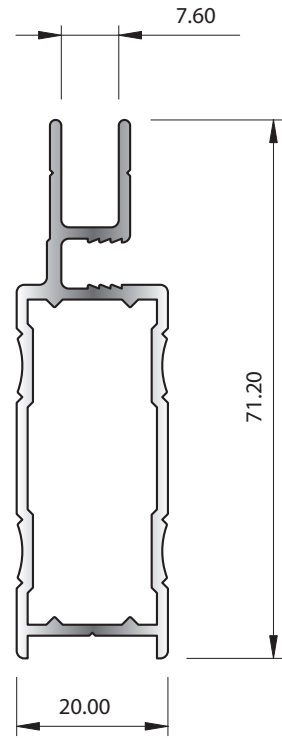


SECTION No. 8039*
ACCEPTS STAKING ANGLES 6256 & 6868
0.768 kg/m
P = 240.30

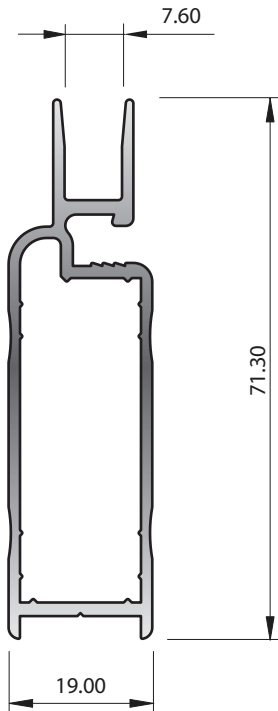


SECTION No. 33423
0.744 kg/m
P = 227.67



SECTION No. K801
0.285 kg/m
P = 153.10



SECTION No. 38959
0.115 kg/m
Ext. P = 52.86 mm

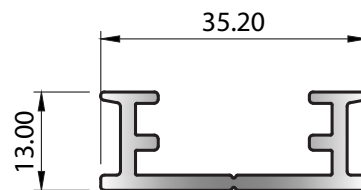


SECTION No. 37209A
0.382 kg/m
Ext. P = 147.9 mm


* SOME SPECIAL TOLERANCES APPLY

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.


Security Doors and Windows Group 4.1.2

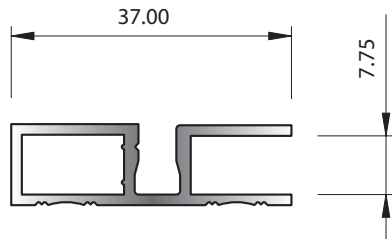

SECTION No. 5663
ACCEPTS STAKING ANGLE 6180
0.351 kg/m
P = 143.50

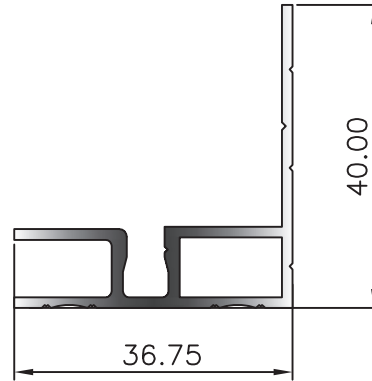


SECTION No. 6179B
0.450 kg/m
P = 194.42




McKechnie®
Transforming Aluminium


Security Doors and Windows Group 4.1.3

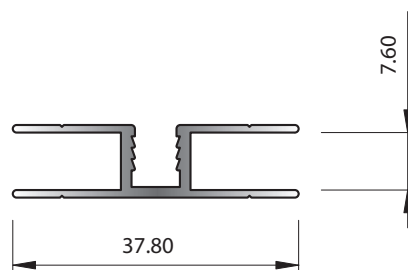


SECTION No. 6488
0.260 kg/m
P = 171.55




SECTION No. X574
0.249 kg/m
P = 126.32

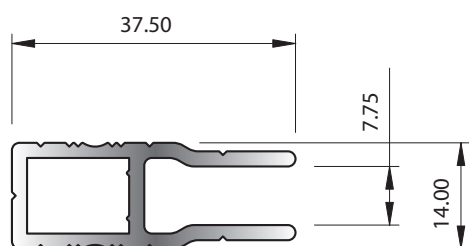


SECTION No. G253
ACCEPTS STAKING ANGLE 6180
0.500 kg/m
P = 194.49



SECTION No. K803
0.158 kg/m
P = 87.40




SECTION No. K804
0.106 kg/m
P = 56.70




SECTION No. K805
0.116 kg/m
P = 62.50


Security Doors and Windows Group 4.1.4




SECTION No. 33629
0.483 kg/m
P = 217.75

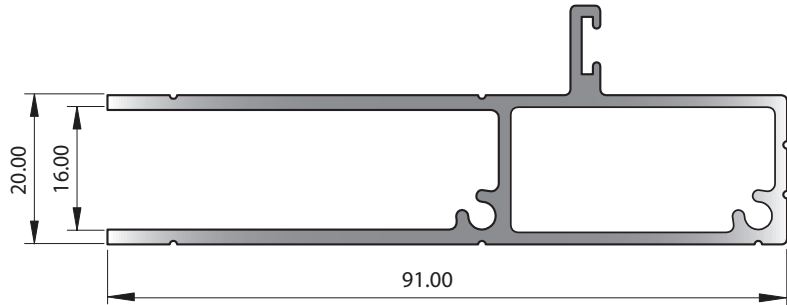


SECTION No. 33630
1.200 kg/m
P = 369.10

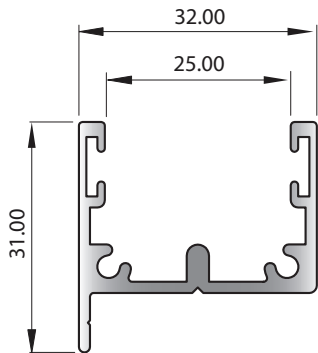


SECTION No. 33627
0.483 kg/m
P = 217.96

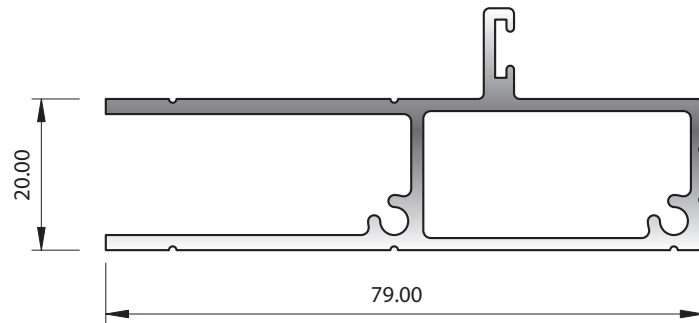


SECTION No. J007
1.022 kg/m
P = 320.58

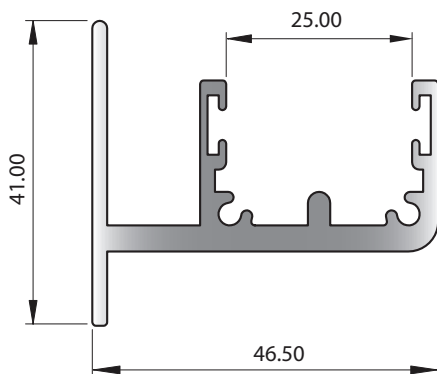

SECTION No. 33628
0.936 kg/m
P = 295.94



SECTION No. 6136
0.150 kg/m
P = 72.23

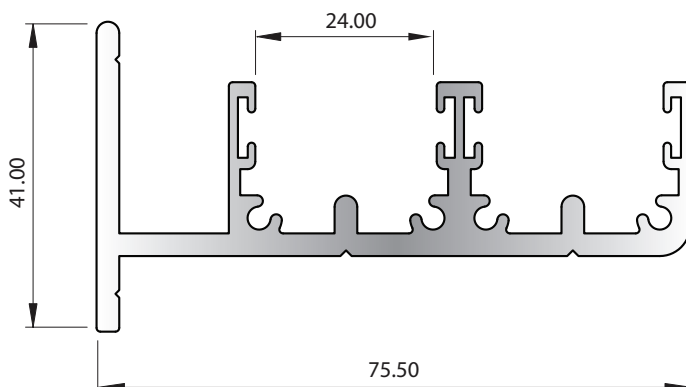


SECTION No. 34689
1.521 kg/m
P = 453.62

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Security Mesh Group 4.2.1

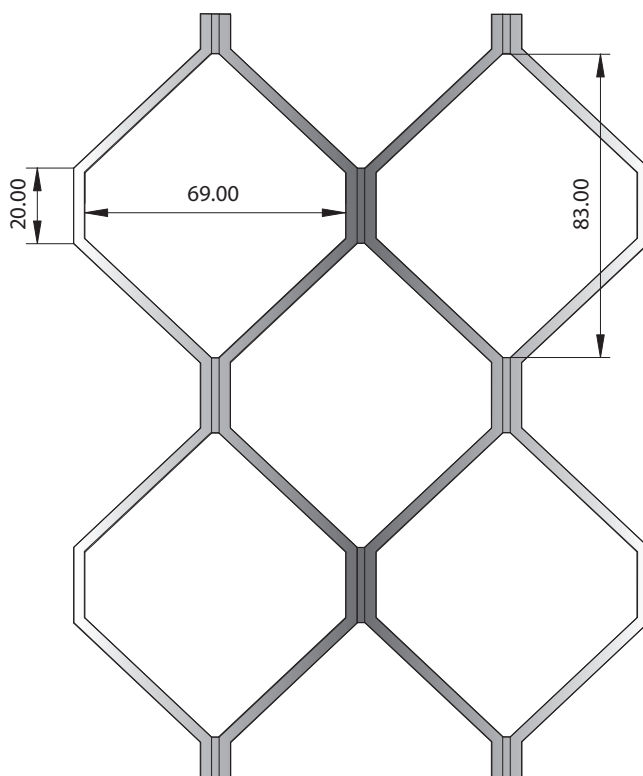

SHEET SIZES IN mm.

750x2073
750x4000
920x2073
920x4000
1250x2073
1250X4000


007 SECURITY MESH

SCALE 2:1




McKechnie®
Transforming Aluminium


Staking Angles Group 4.3.1

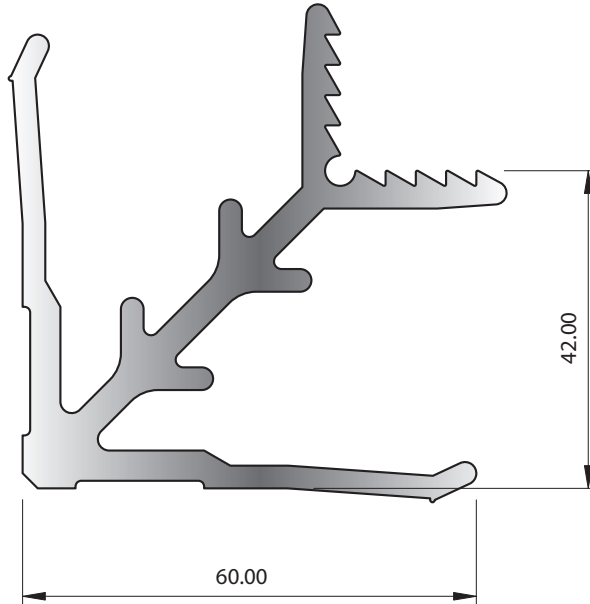

SECTION No. 6256
TO FIT WITH SECTION No. K067 & 6867
2.278 kg/m
P = 464.16

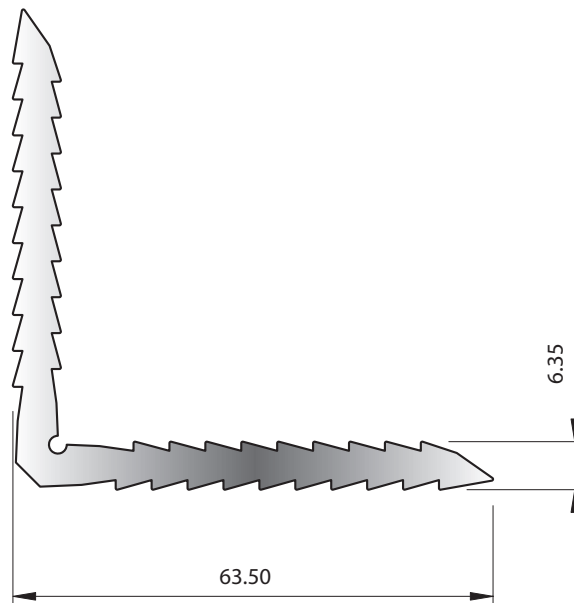


SECTION No. 9126
1.582 kg/m
P = 296




McKechnie®
Transforming Aluminium


Staking Angles Group 4.3.2

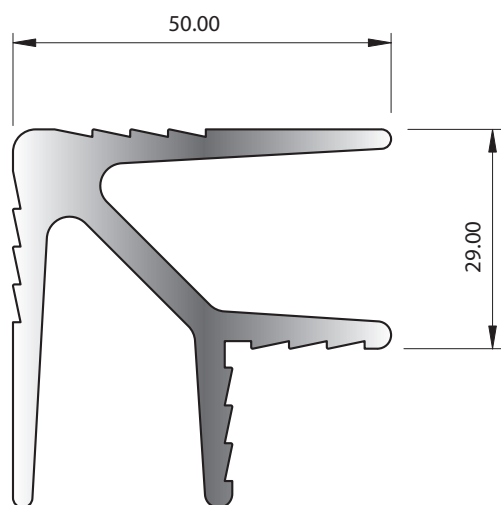

SECTION No. J688*
TO FIT WITH SECTION No. 9775
1.747 kg/m
P = 338.30

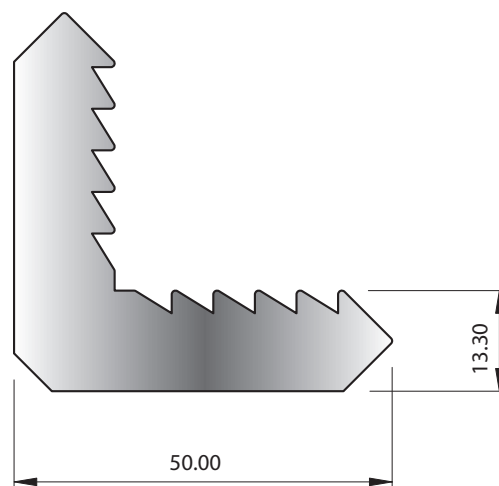

SECTION No. X124*
TO FIT WITH SECTION No. 5663
2.666 kg/m
P = 218.14

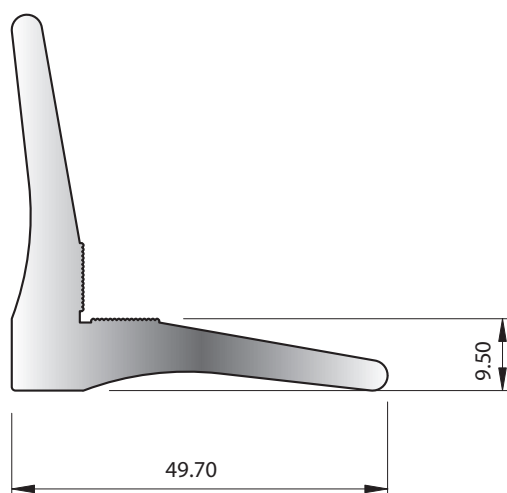

SECTION No. X429
TO FIT WITH SECTION No. J058
1.475 kg/m
P = 192.90


* SOME SPECIAL TOLERANCES APPLY

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.




McKechnie®
Transforming Aluminium

Staking Angles Group 4.3.3

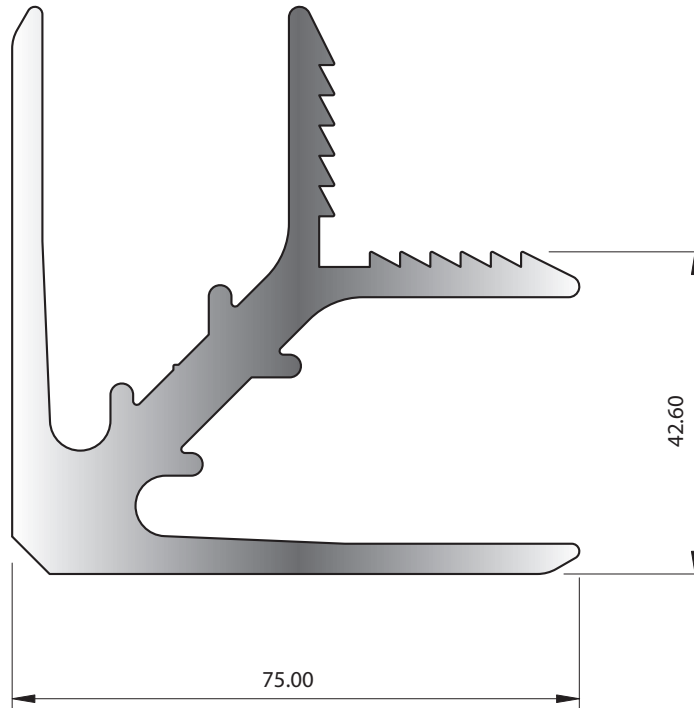


SECTION No. X390*
3.825 kg/m
P = 539.66




McKechnie®
Transforming Aluminium

Staking Angles Group 4.3.4

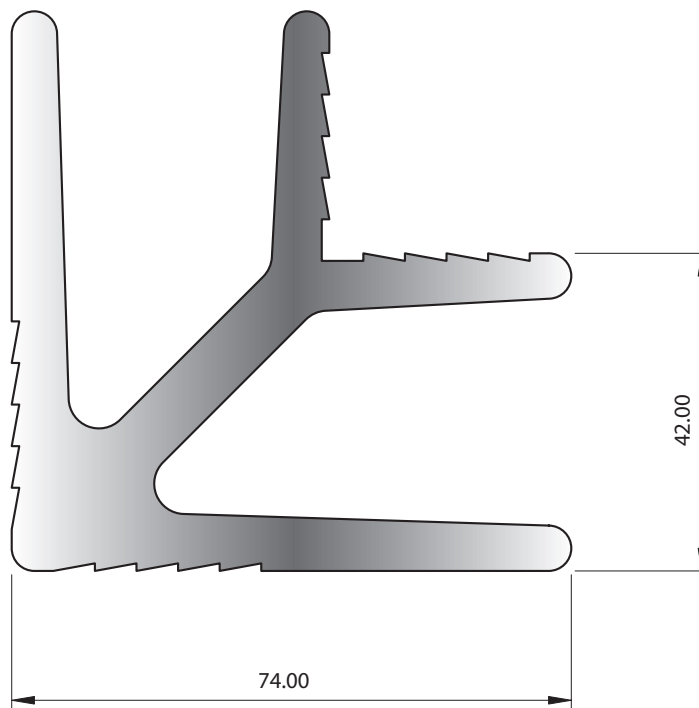

SECTION No. 6868*
4.730kg/m
P = 489.18




SECTION No. 6497
0.329 kg/m
P = 108

* SOME SPECIAL TOLERANCES APPLY

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.


Staking Angles Group 4.3.5

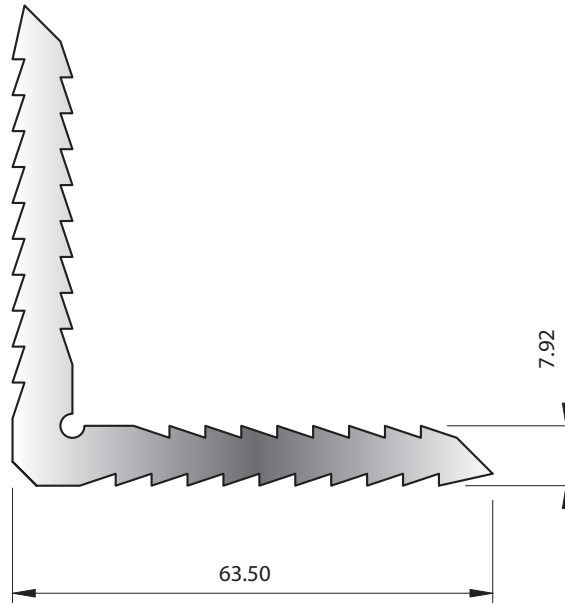


SECTION No. 1754
1.999 kg/m
P = 312




Insect Screens Group 4.4.1




SECTION No. J031
0.191 kg/m
P = 94




SECTION No. J058
ACCEPTS STAKING ANGLE X429
0.232 kg/m
P = 94.71

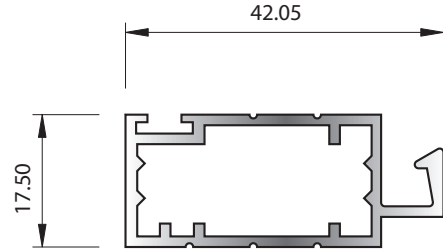


SECTION No. 9775
ACCEPTS STAKING ANGLE J688
0.494 kg/m
P = 150.10

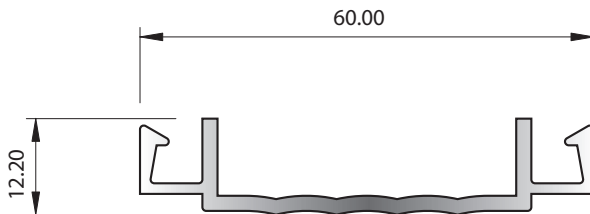


SECTION No. J030
0.496 kg/m
P = 199

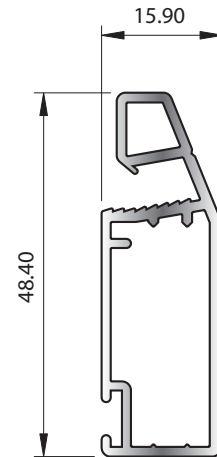

SECTION No. 31966
0.515 kg/m
P = 156.98

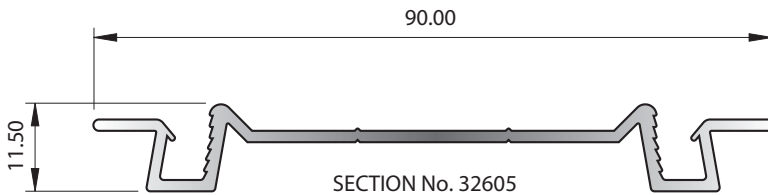


SECTION No. 32605
0.540 kg/m
P = 262.43

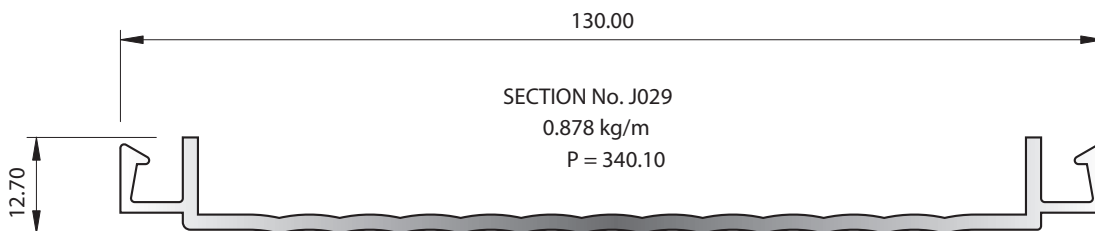


SECTION No. J029
0.878 kg/m
P = 340.10


Insect Screens Group 4.4.2




SECTION No. X075
0.162 kg/m
P = 98.63




SECTION No. X076
0.119 kg/m
P = 79.33

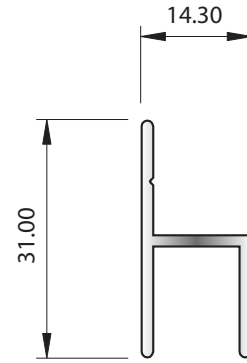

SECTION No. J032
0.234 kg/m
P = 118

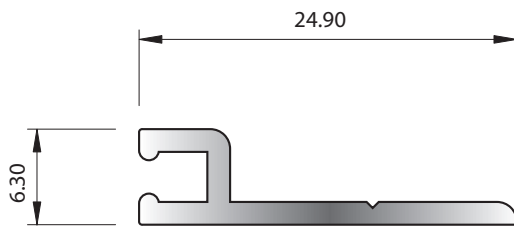

SECTION No. X389
2 x ACTUAL SIZE
0.139 kg/m
P = 71.64

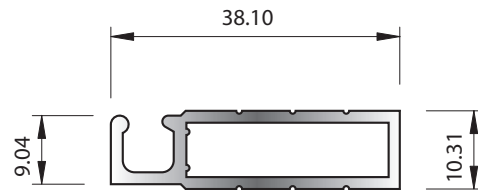


SECTION No. 2974
0.387 kg/m
P = 114.31



Transport


McKechnie®
Transforming Aluminium

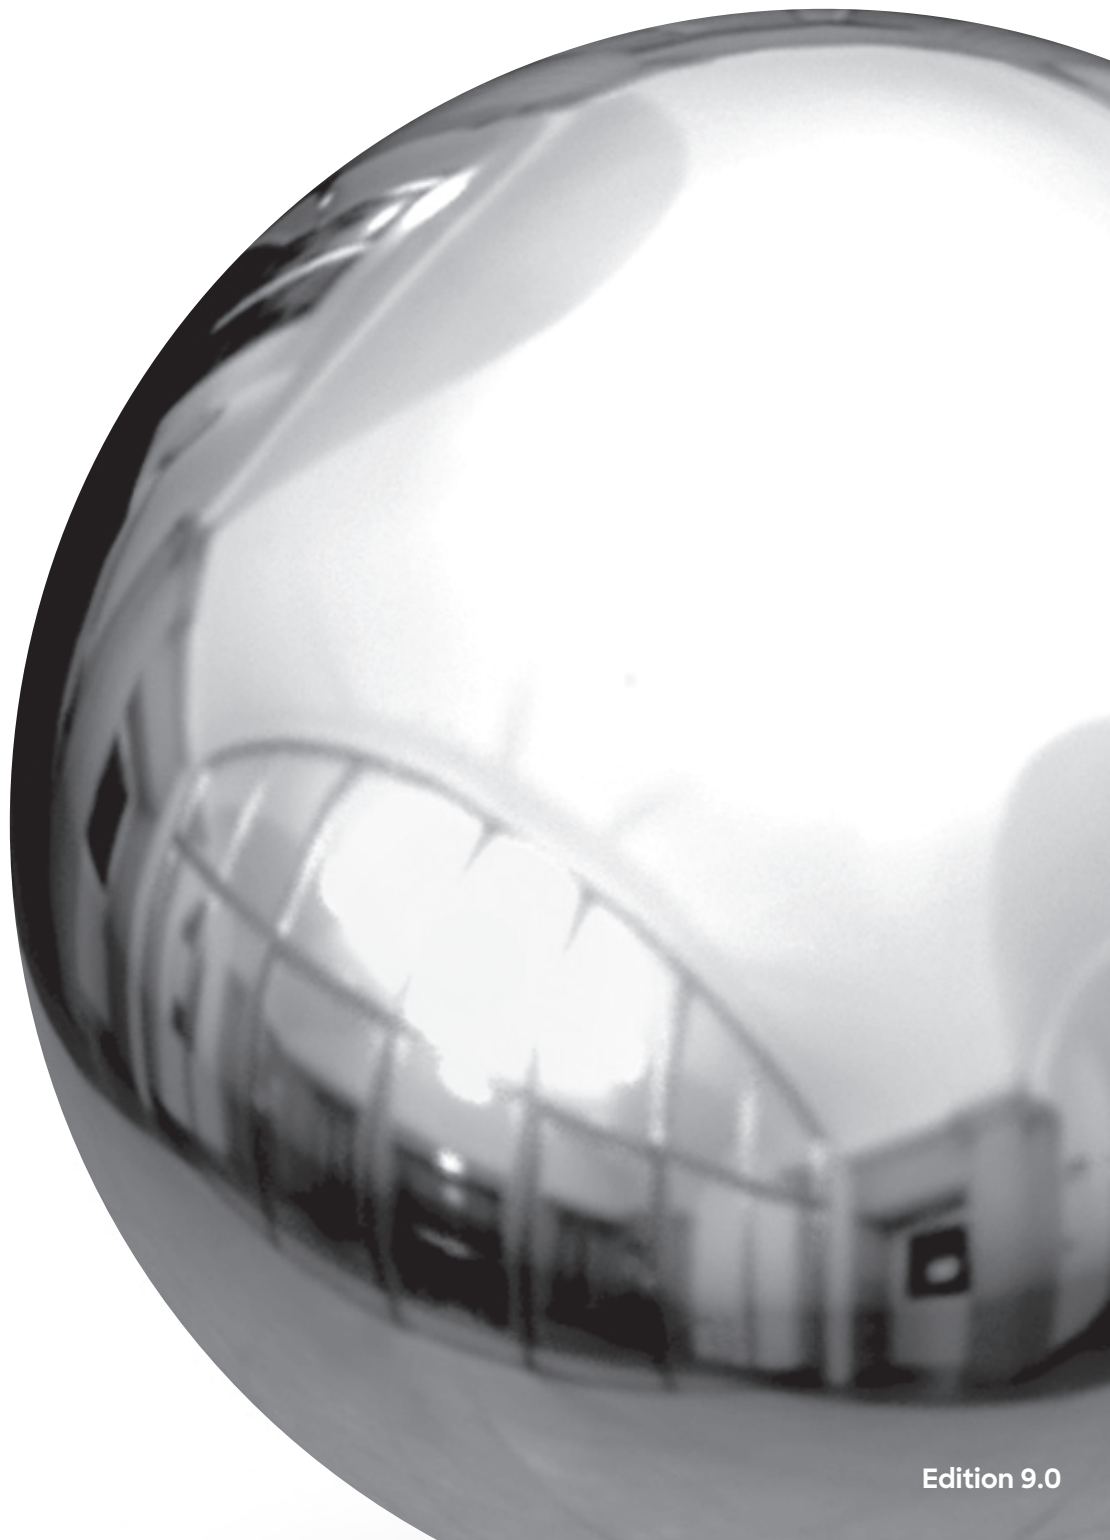



McKechnie®
Transforming Aluminium


Bull Bars Group 5.1.1

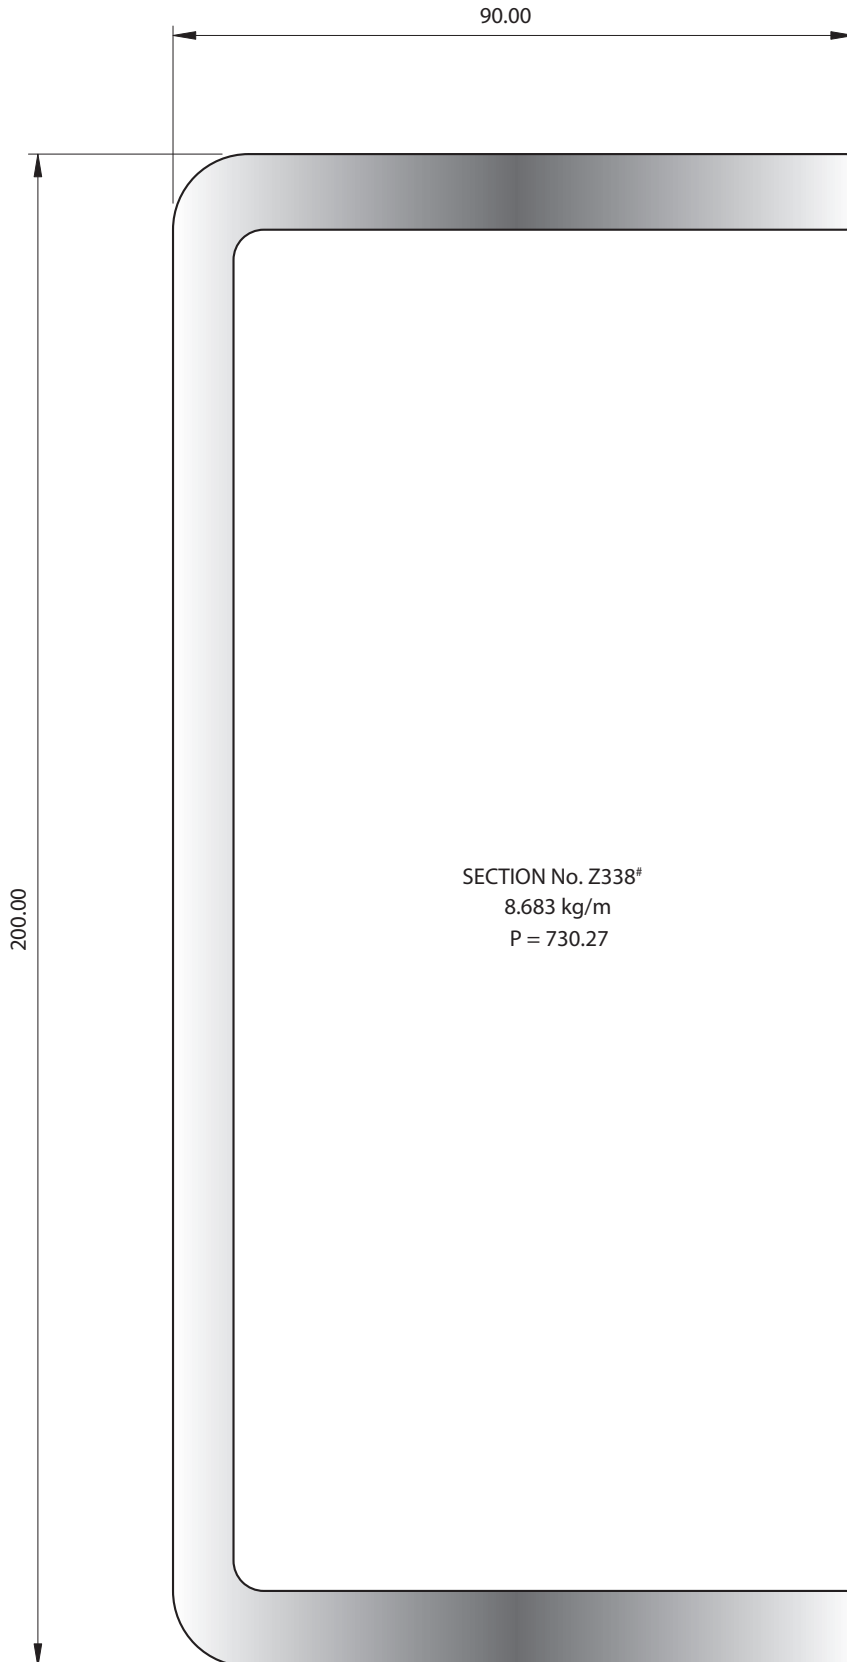


These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.


Bull Bars Group 5.1.2

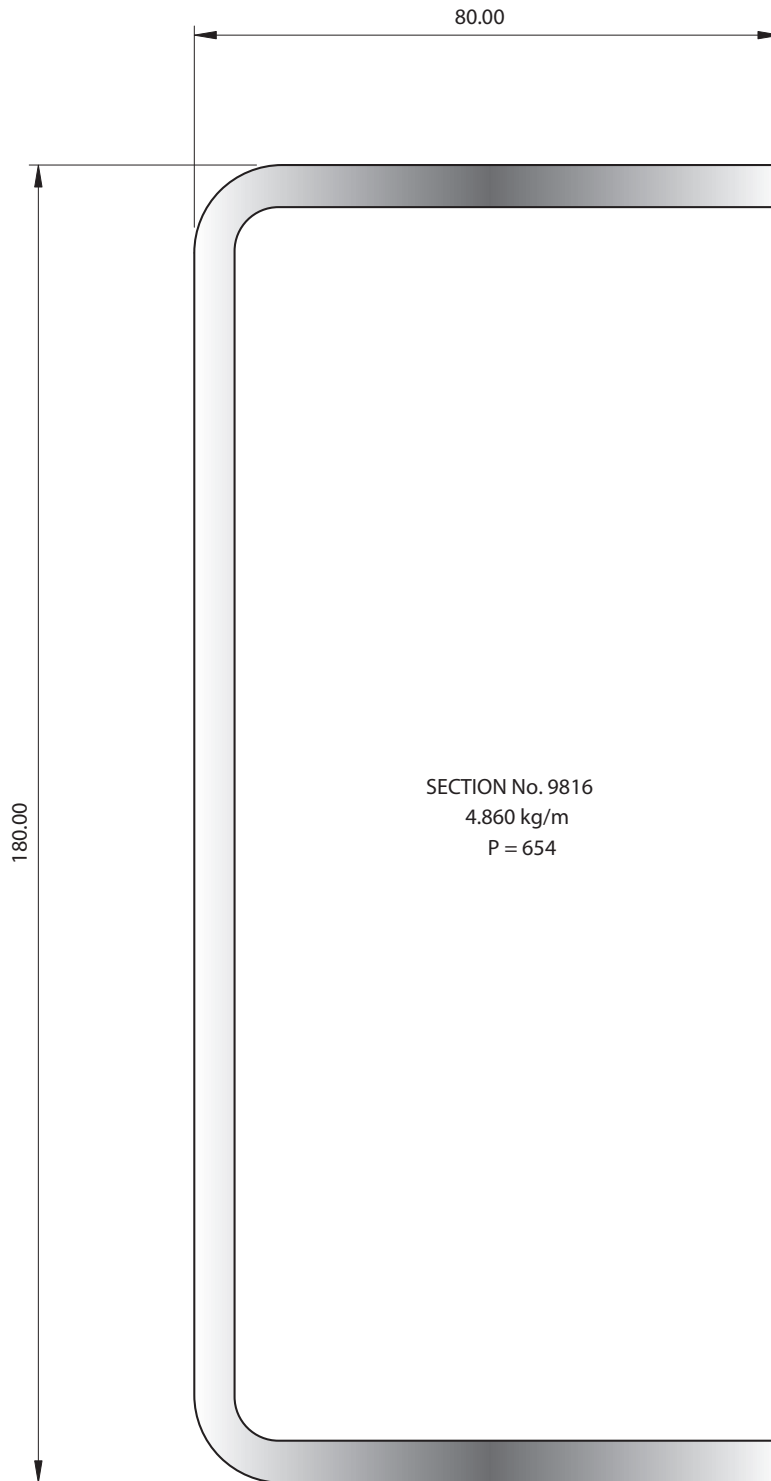



McKechnie®
Transforming Aluminium

Bull Bars Group 5.1.3

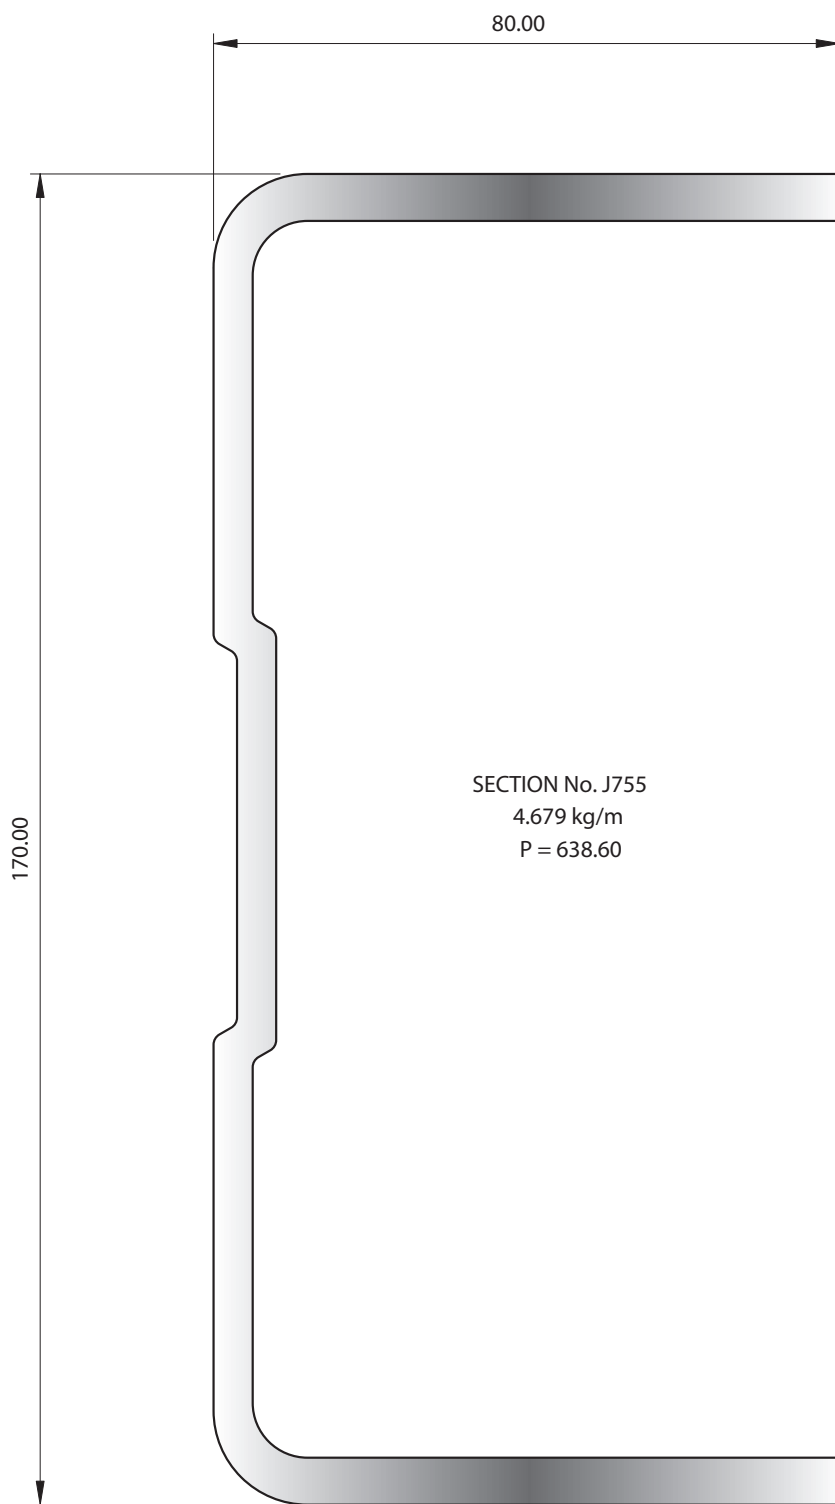


Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.




McKechnie®
Transforming Aluminium

Bull Bars Group 5.1.6

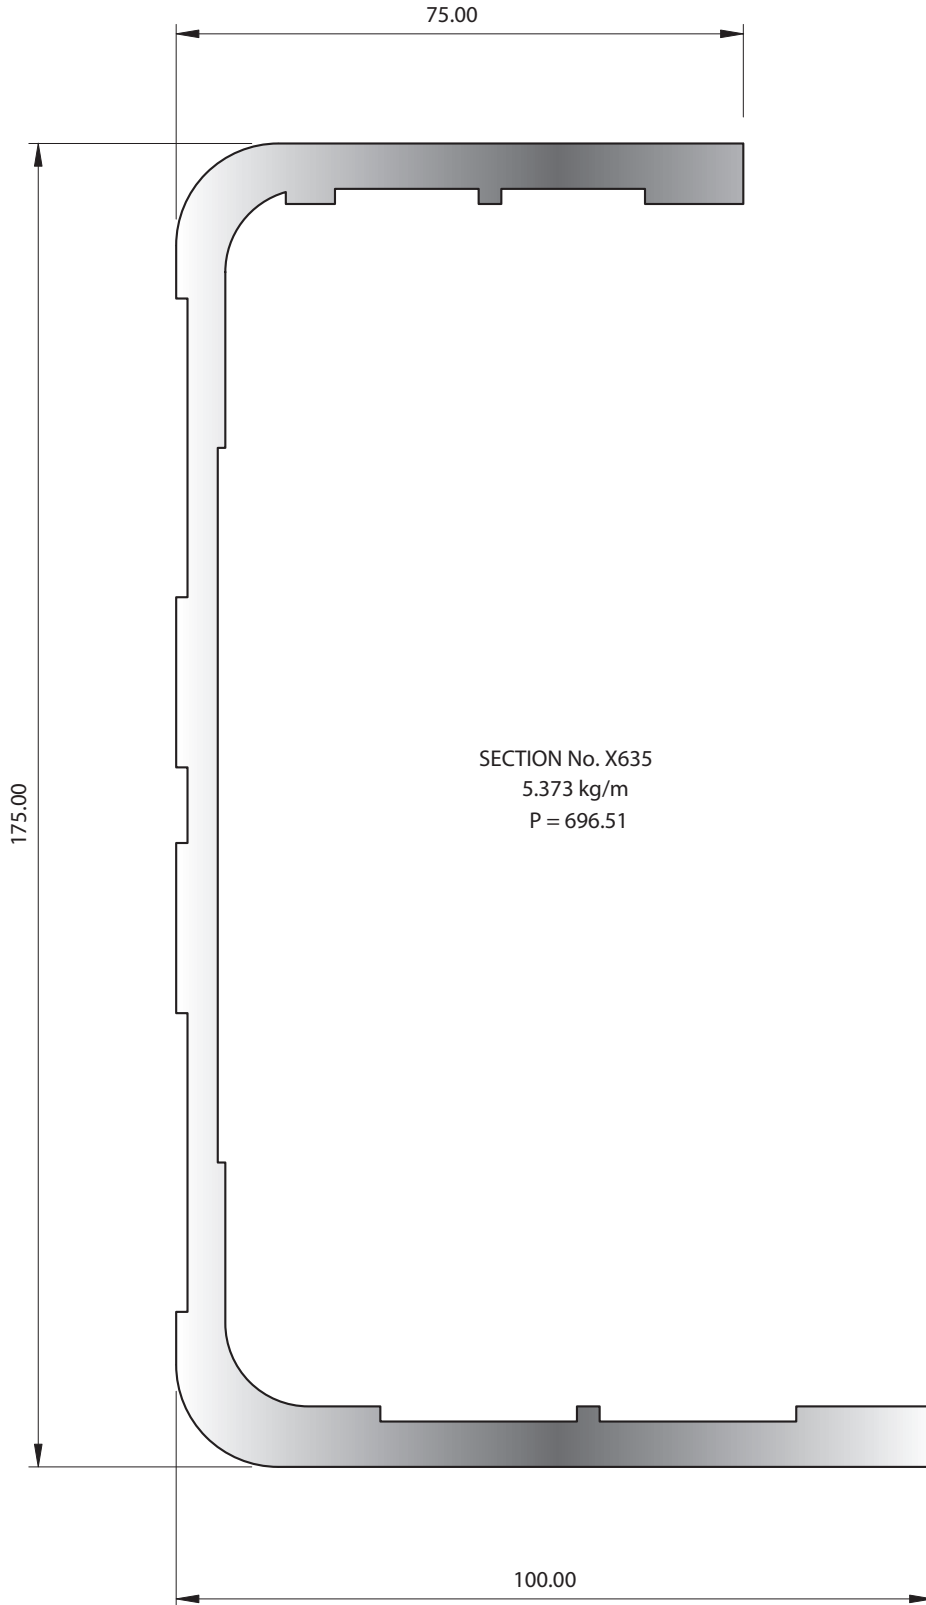


Bull Bars Group 5.1.6



McKechnie®
Transforming Aluminium

Bull Bars Group 5.1.7

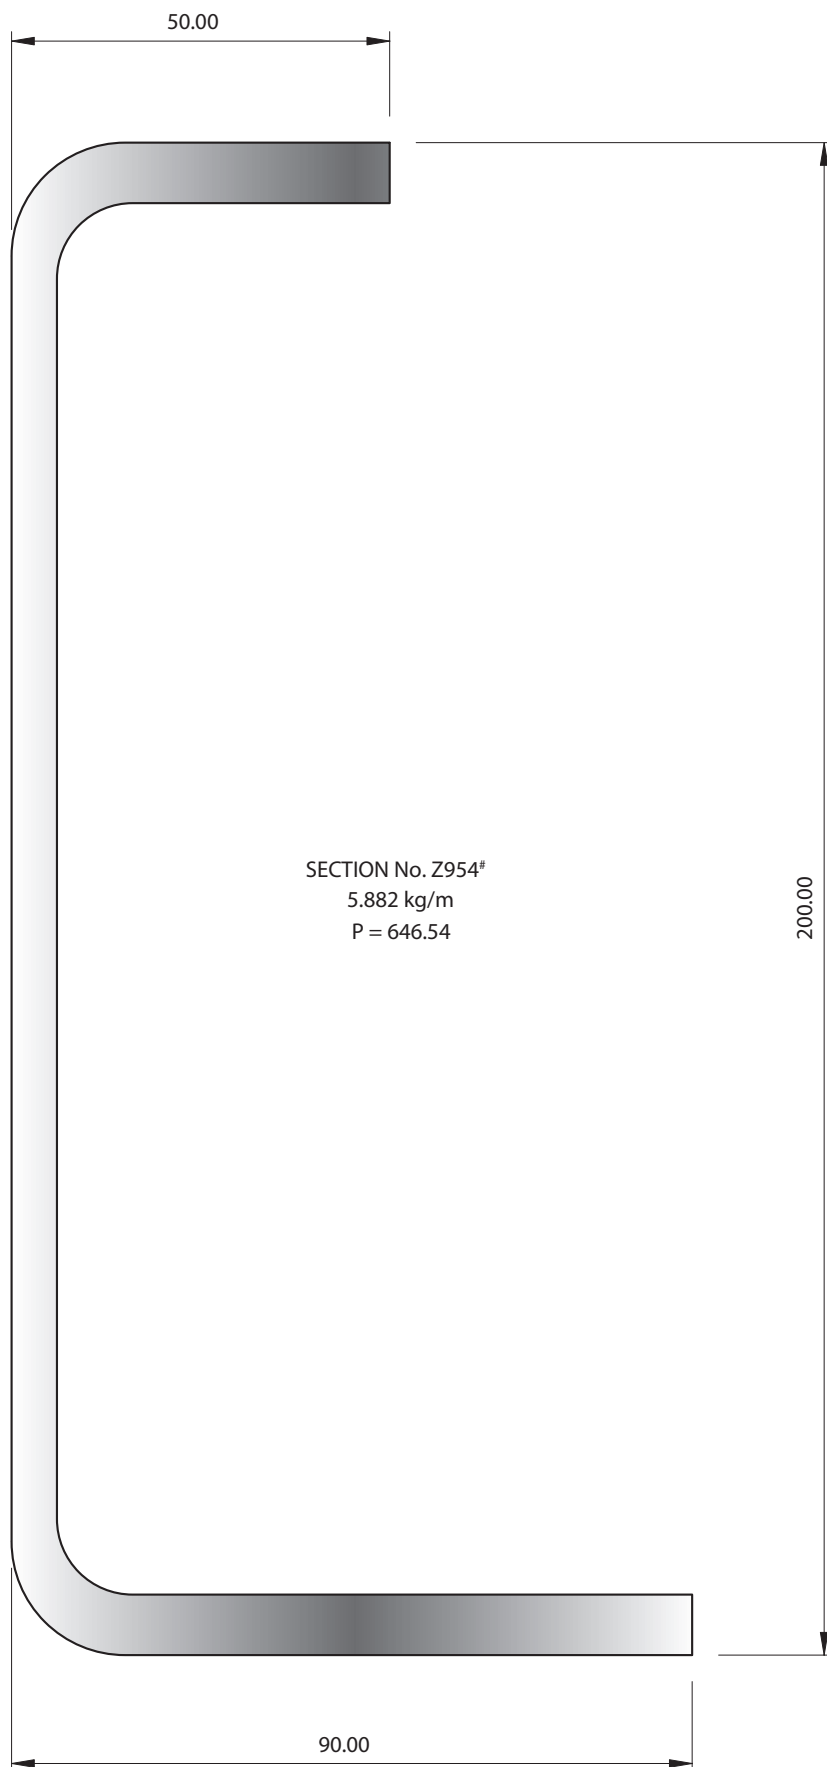


SECTION No. Z954#
5.882 kg/m
P = 646.54


These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.


Dripmoulds and Awnings Group 5.2.1




SECTION No. 1631
0.553 kg/m
P = 119




SECTION No. 6595
0.221 kg/m
P = 95.94




SECTION No. 6130
0.148 kg/m
P = 76

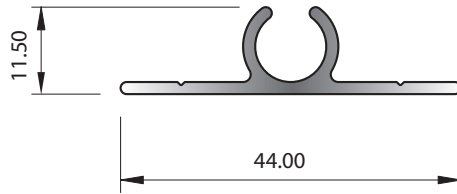


SECTION No. 8955
0.279 kg/m
P = 129.99




SECTION No. 35511
0.382 kg/m
P = 125.94




SECTION No. 0825
0.338 kg/m
P = 110




SECTION No. 33601
0.194 kg/m
P = 103.12

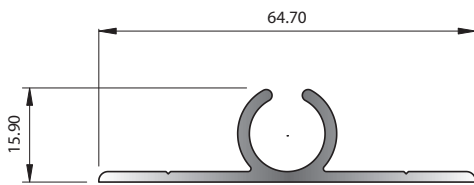

SECTION No. 34987
0.496 kg/m
P = 192.36



SECTION No. 35512
0.708 kg/m
P = 211.83

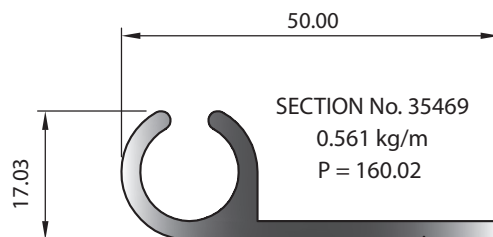


SECTION No. 35469
0.561 kg/m
P = 160.02




McKechnie®
Transforming Aluminium


Marine Group 5.3.1

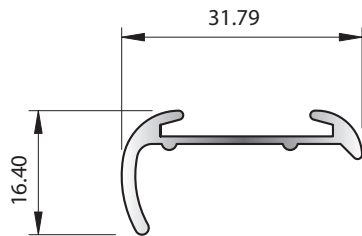


SECTION No. G348
0.216 kg/m
P = 111.53

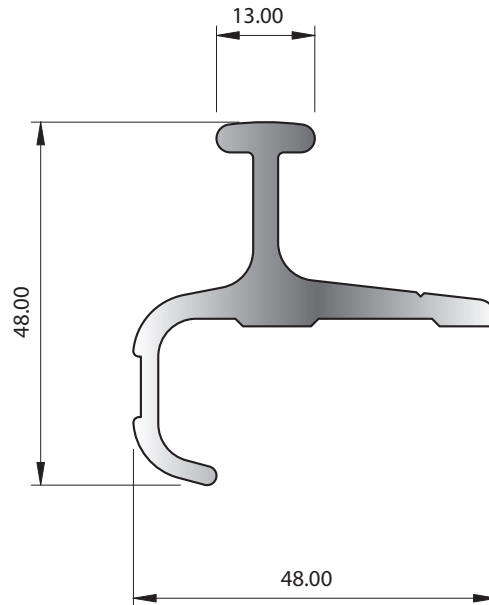

SECTION No. 7509
1.046 kg/m
P = 210.62

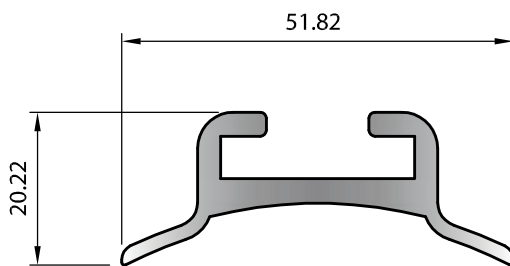

SECTION No. 2131
0.694 kg/m
P = 176.19

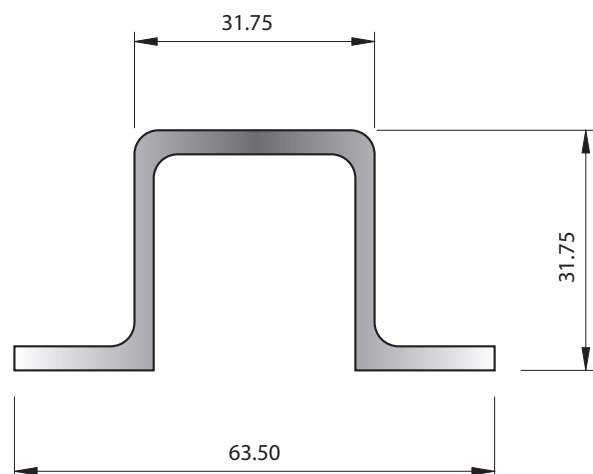


SECTION No. Z741
0.952 kg/m
P = 239.45


Marine Group 5.3.2



Marine Group 5.3.3




McKechnie®
Transforming Aluminium

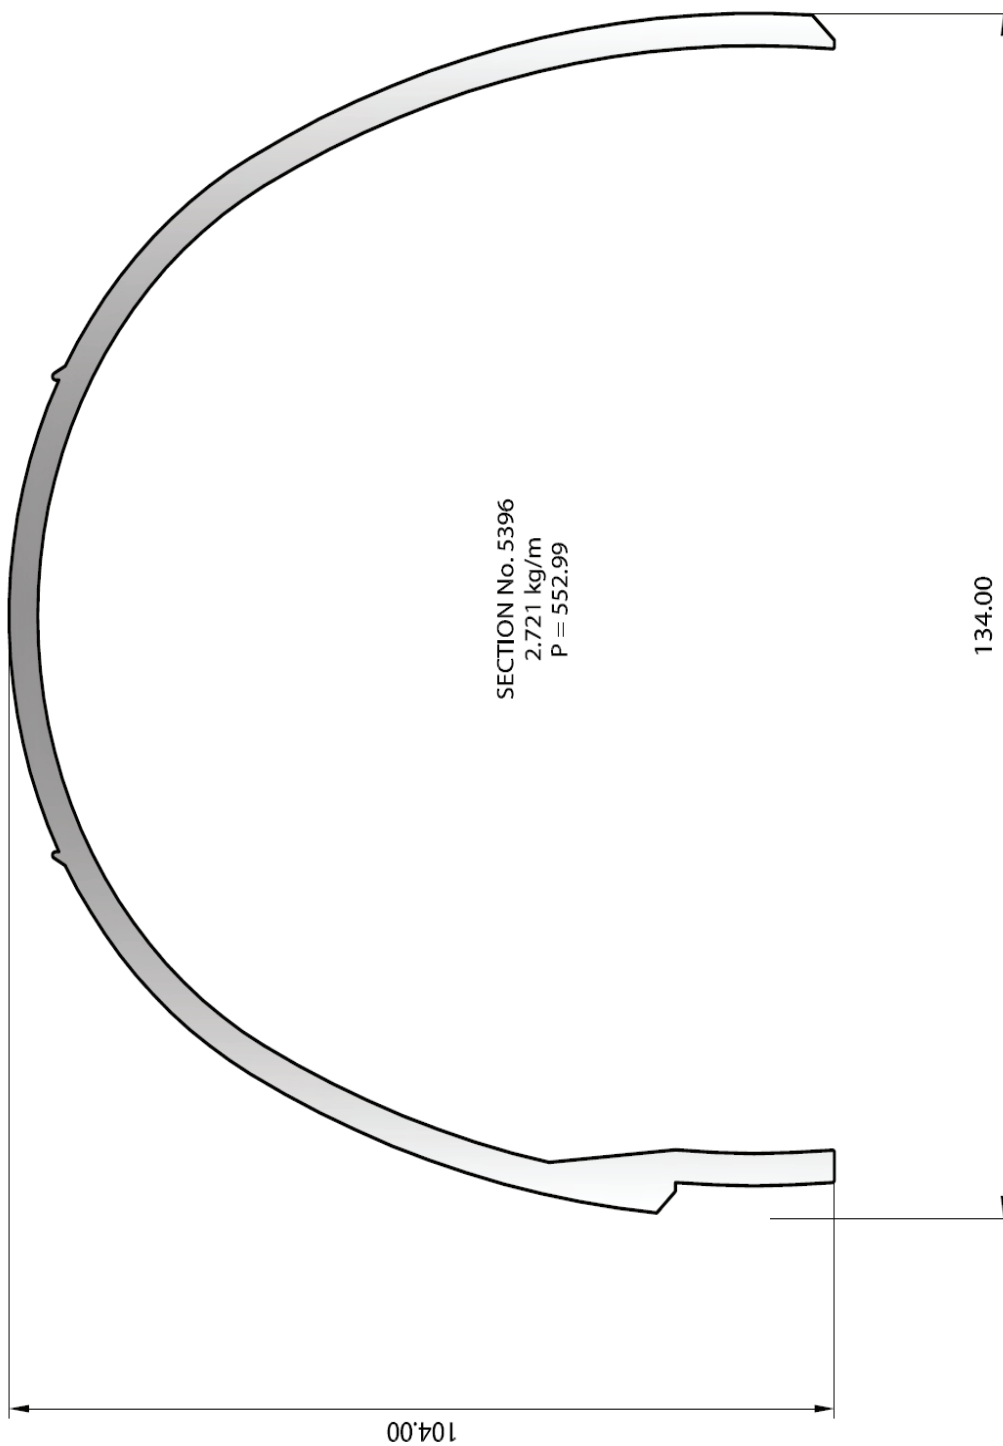

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.


Light Duty 1 Tonne Truck Deck Group 5.4.1

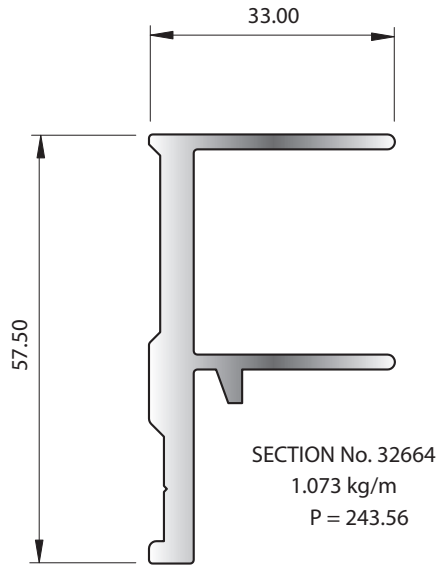



McKechnie®
Transforming Aluminium


Medium Duty 1-2 Tonne Truck Deck Group 5.5.1

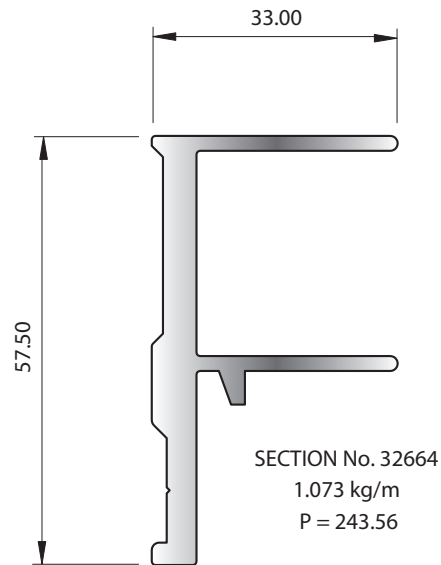



McKechnie®
Transforming Aluminium

General 1-2 Tonne Truck Deck Group 5.6.1

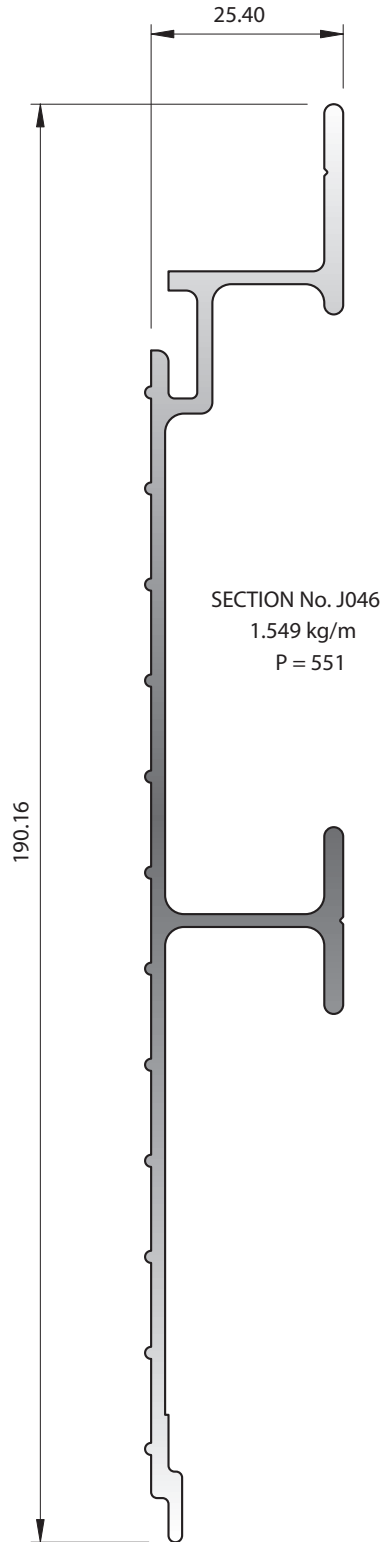


General 1-2 Tonne Truck Deck Group 5.6.1



McKechnie®
Transforming Aluminium

Titan 1-2 Tonne Truck Deck Group 5.7.1

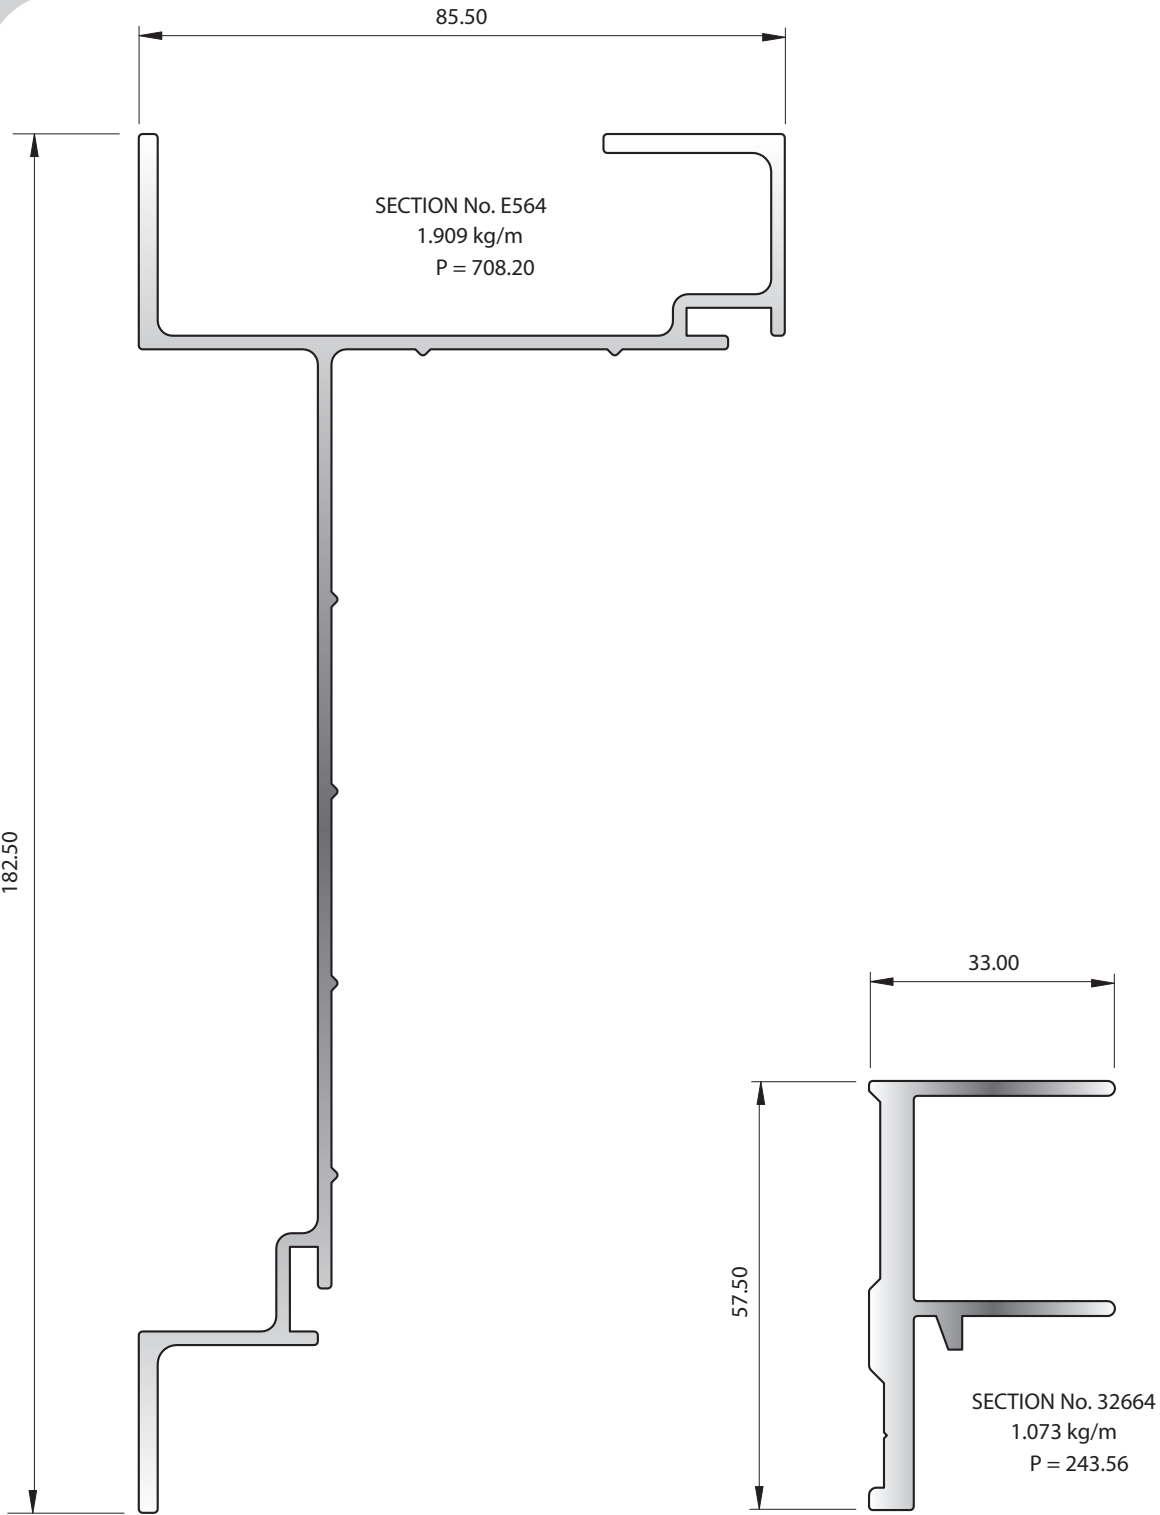


Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Titan 1-2 Tonne Truck Deck Group 5.7.2

Titan 1-2 Tonne Truck Deck Group 5.7.2

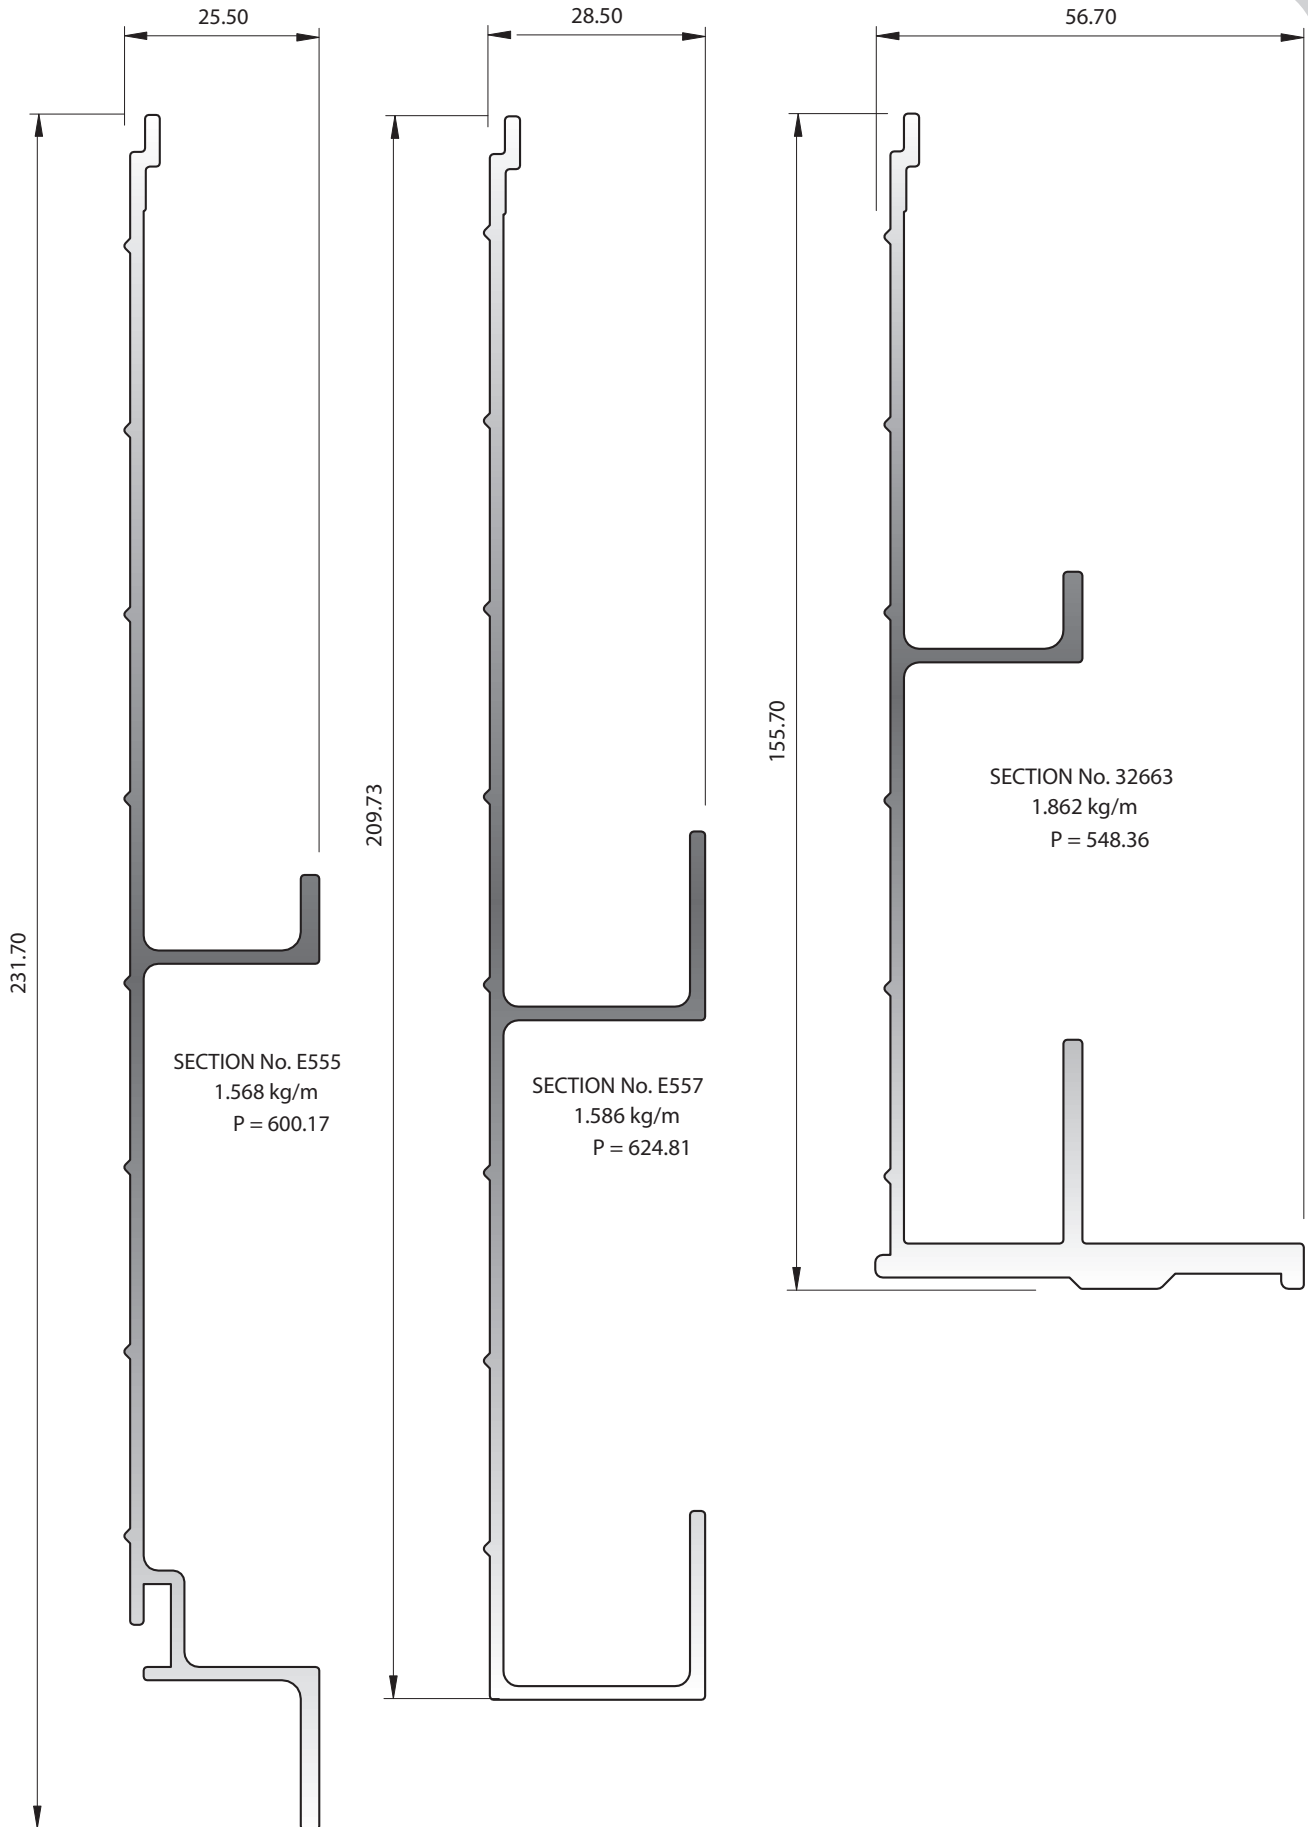


Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

4-6 Tonne Truck Deck Group 5.8.1

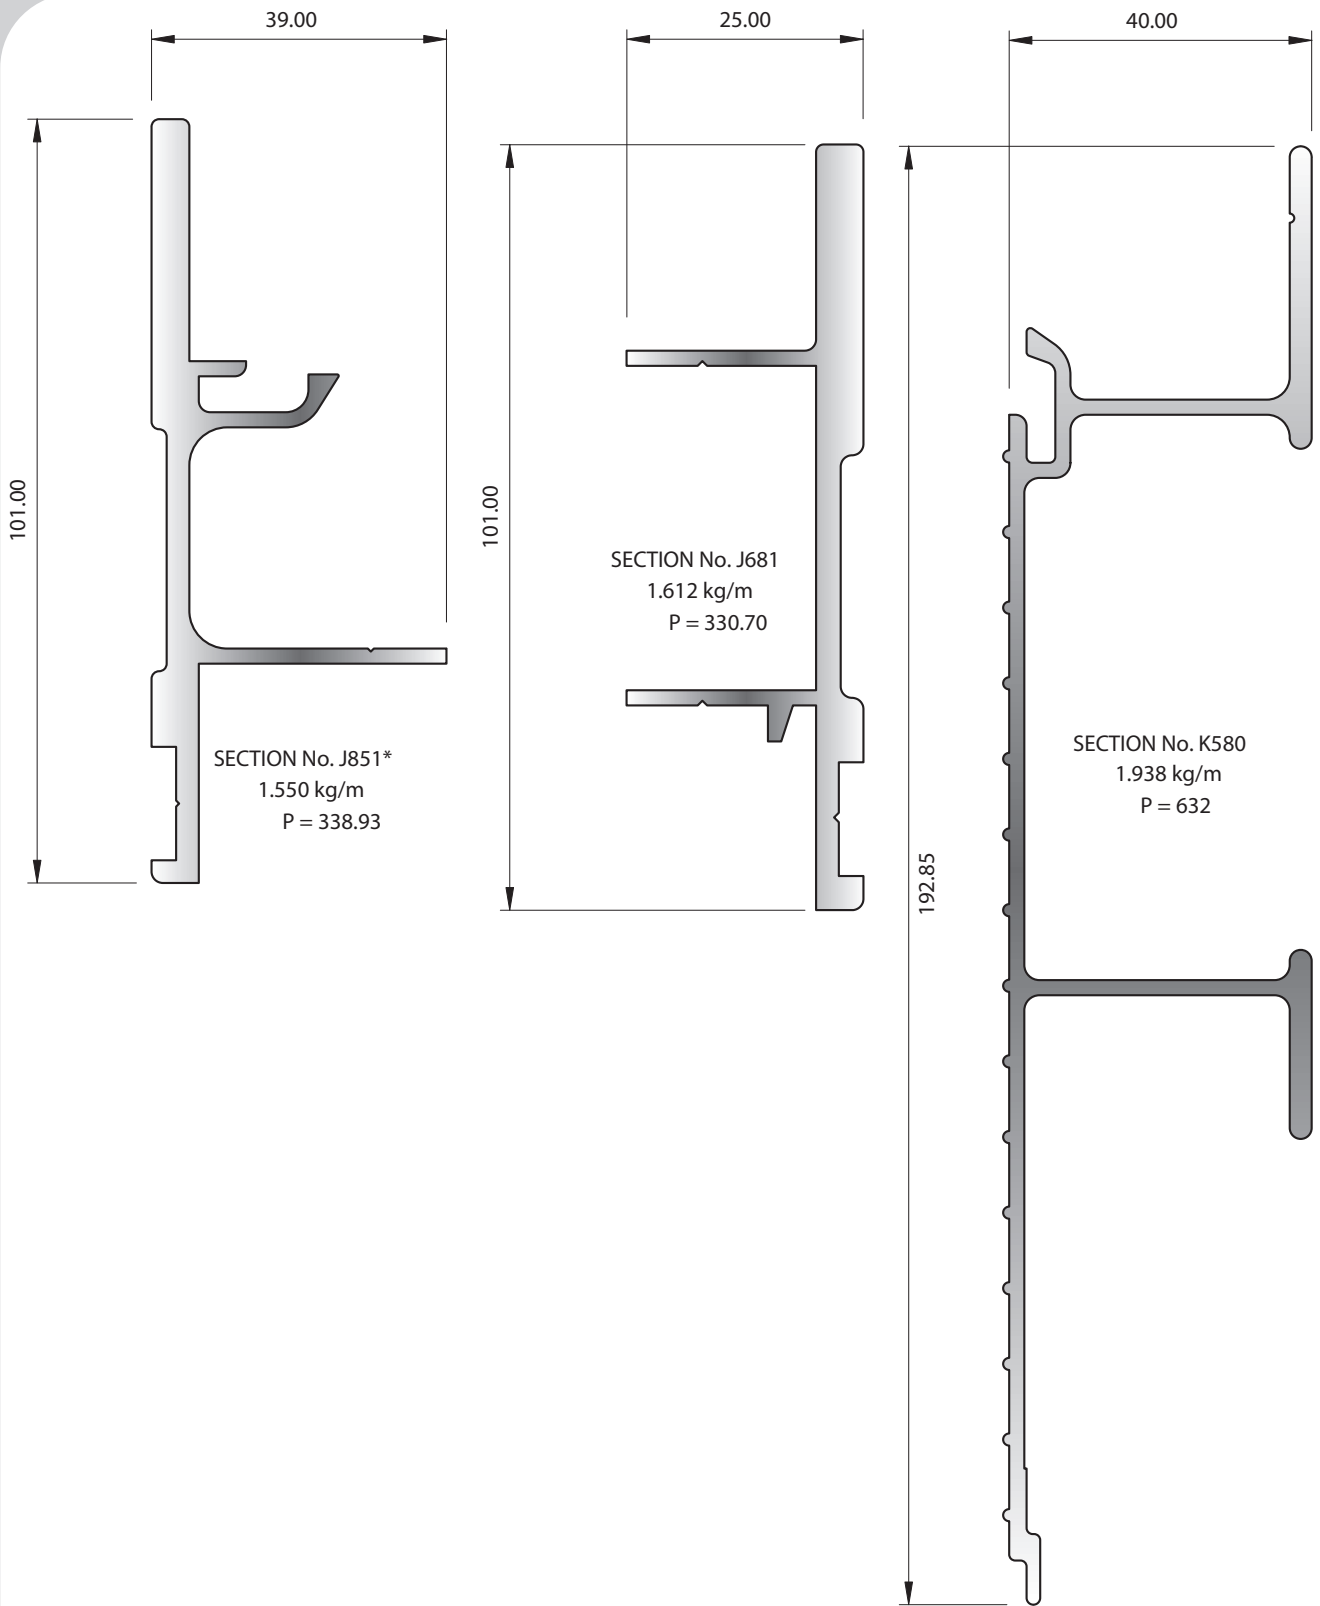

* SOME SPECIAL TOLERANCES APPLY


Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

4-6 Tonne Truck Deck Group 5.8.2

4-6 Tonne Truck Deck Group 5.8.2

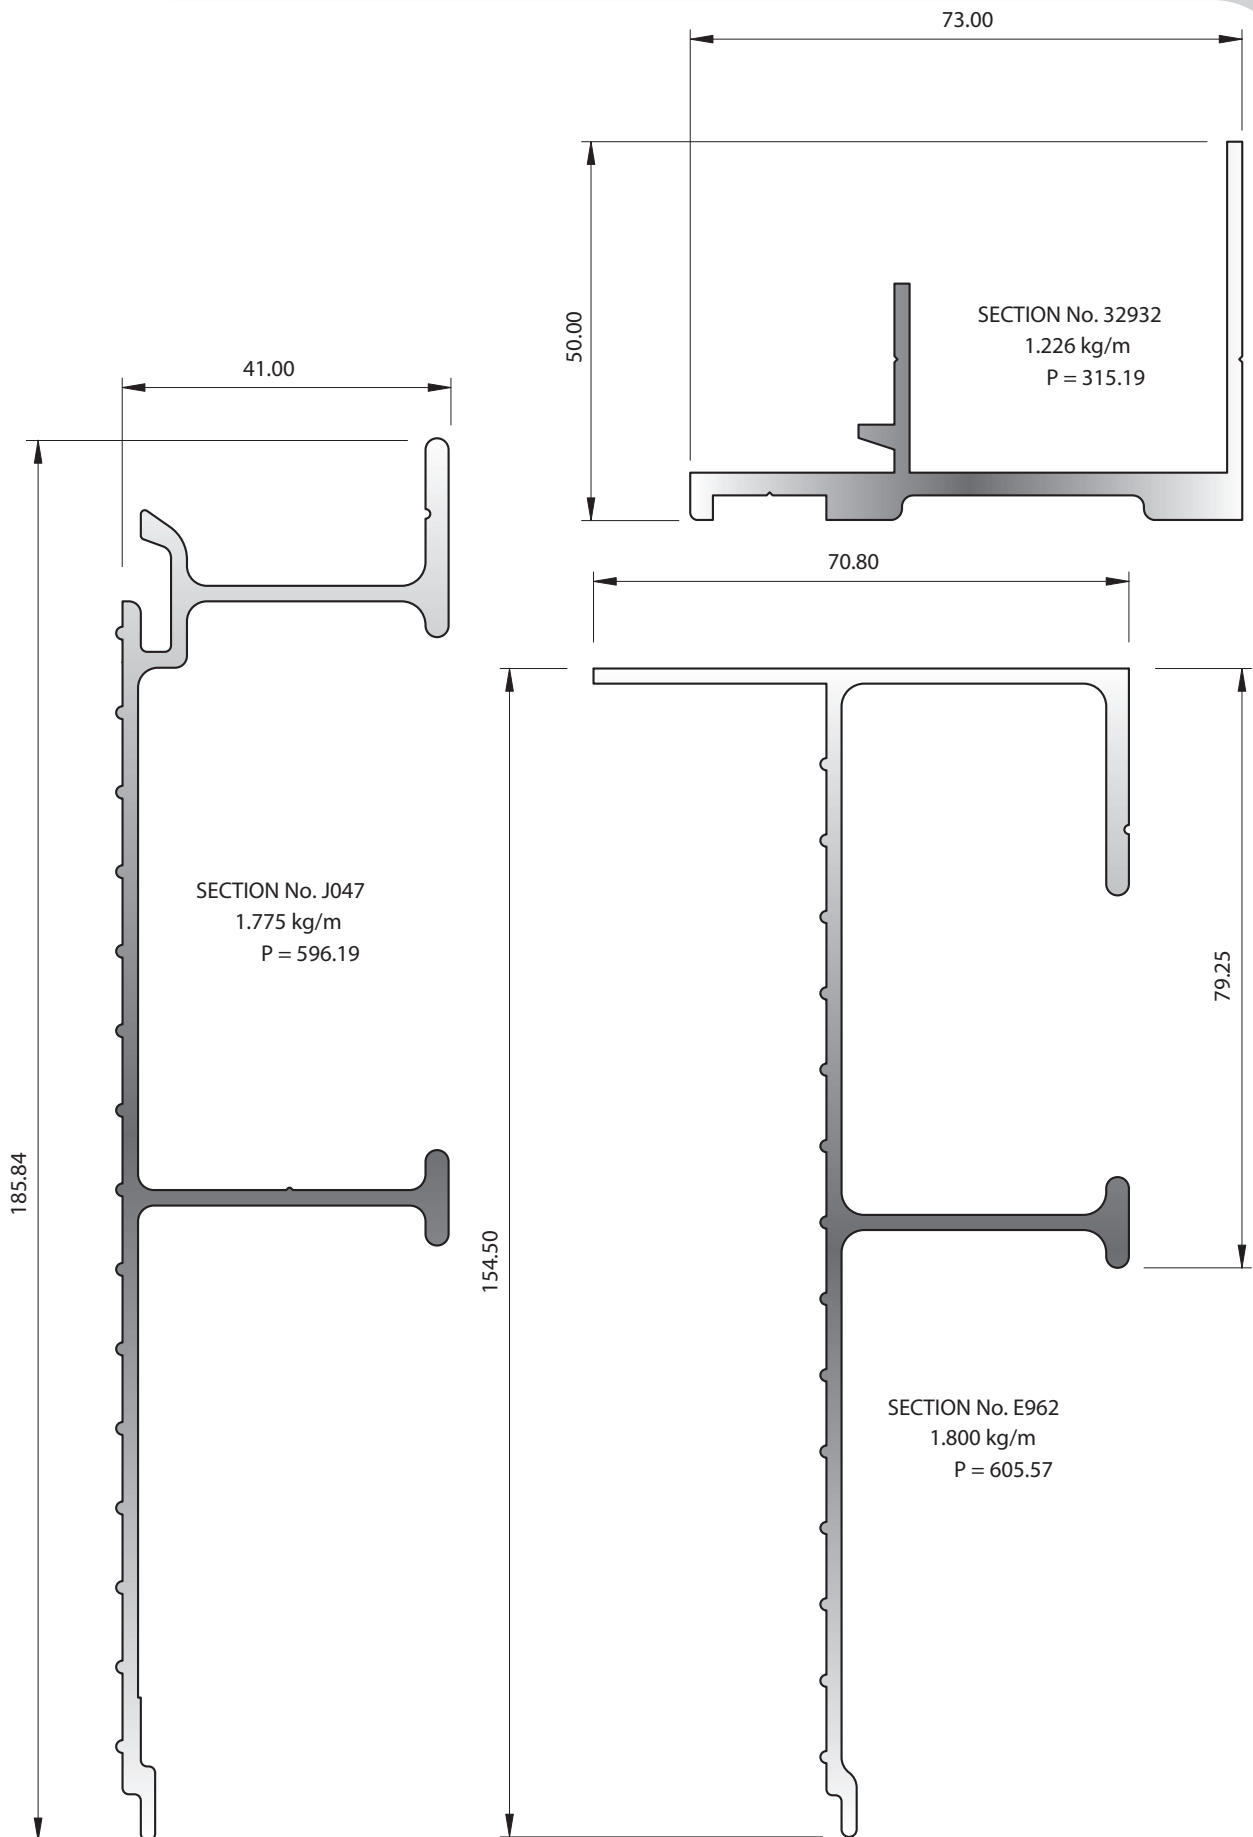


Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

16 Tonne Truck Deck Group 5.9.1

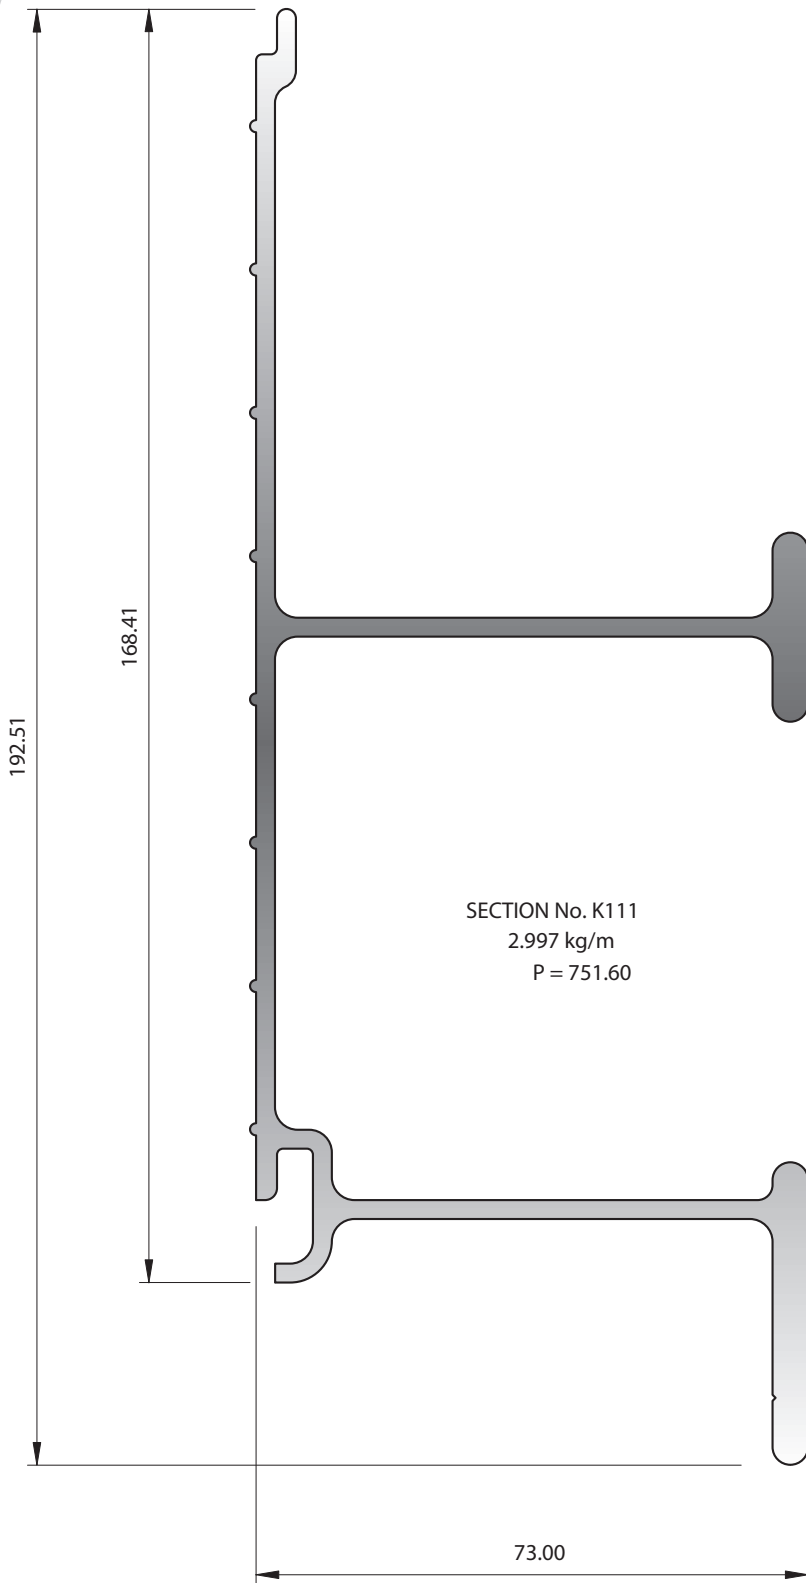


Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.




McKechnie®
Transforming Aluminium

Miscellaneous Flooring Group 5.10.1

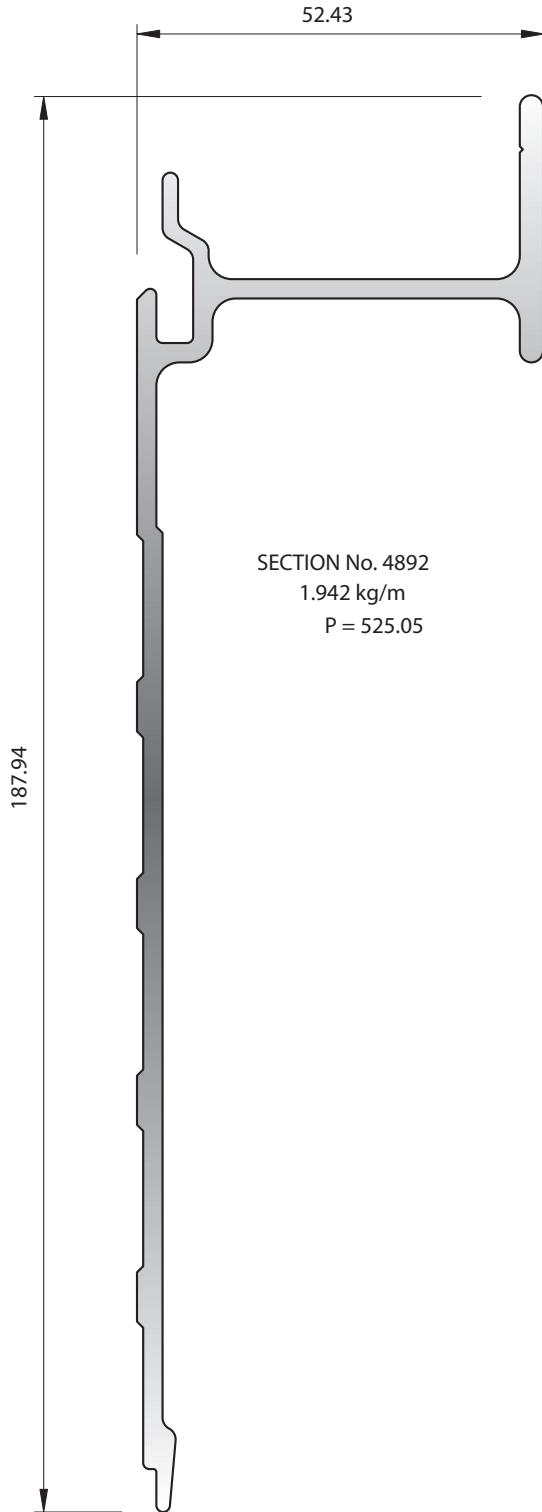


Miscellaneous Flooring Group 5.10.1



McKechnie®
Transforming Aluminium

Sideboard Options Group 5.11.1

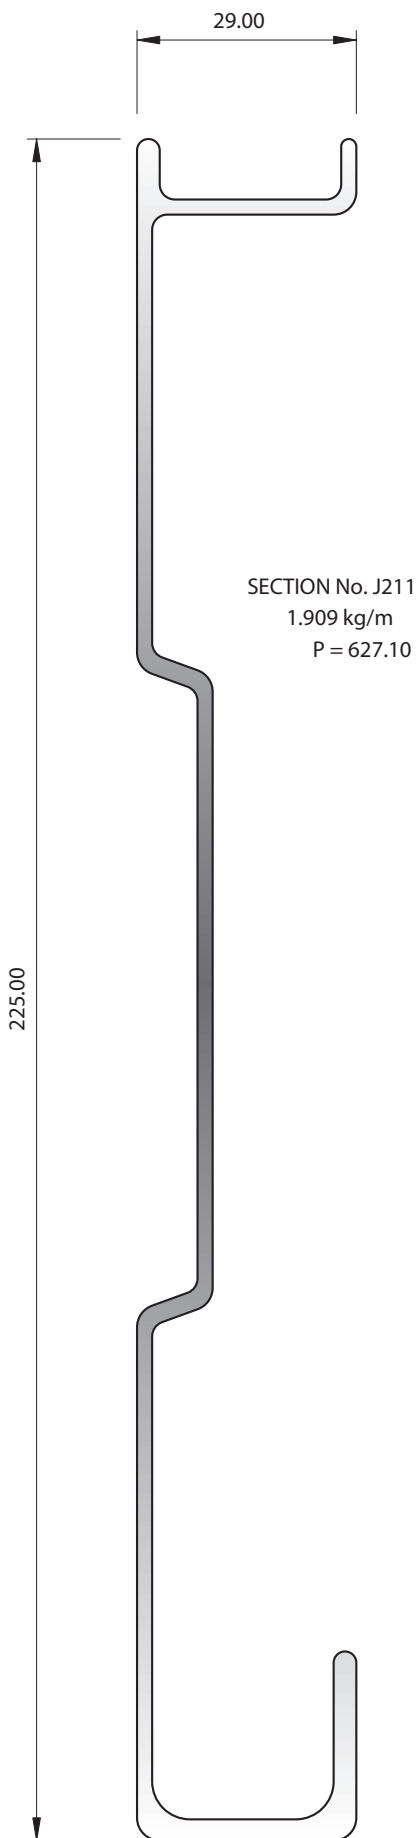


Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium

Sideboard Options Group 5.11.2

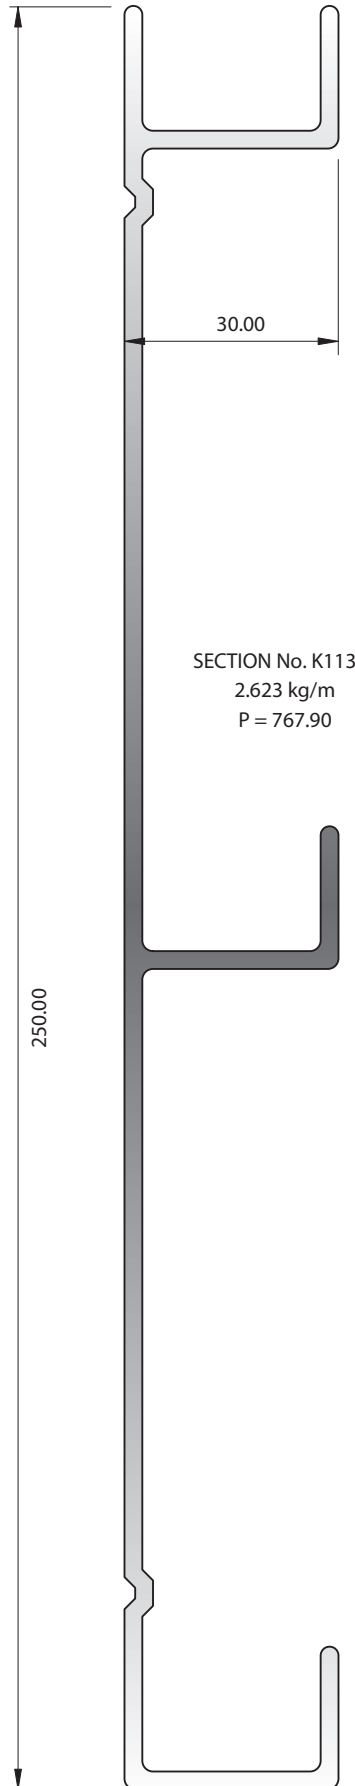


Sideboard Options Group 5.11.2



McKechnie®
Transforming Aluminium



Rope Rail Brackets Group 5.12.1

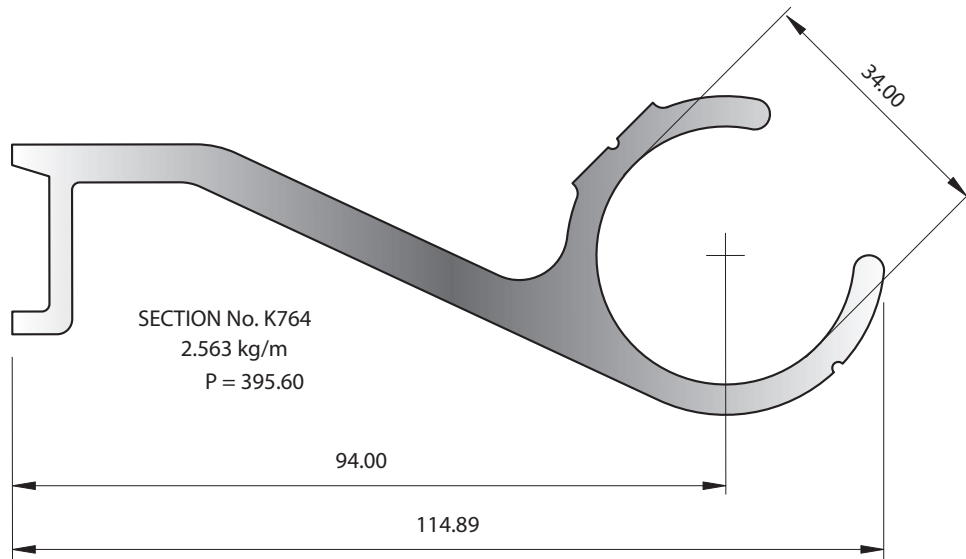



McKechnie®
Transforming Aluminium


Curtain Side Top Tracks Group 5.13.1

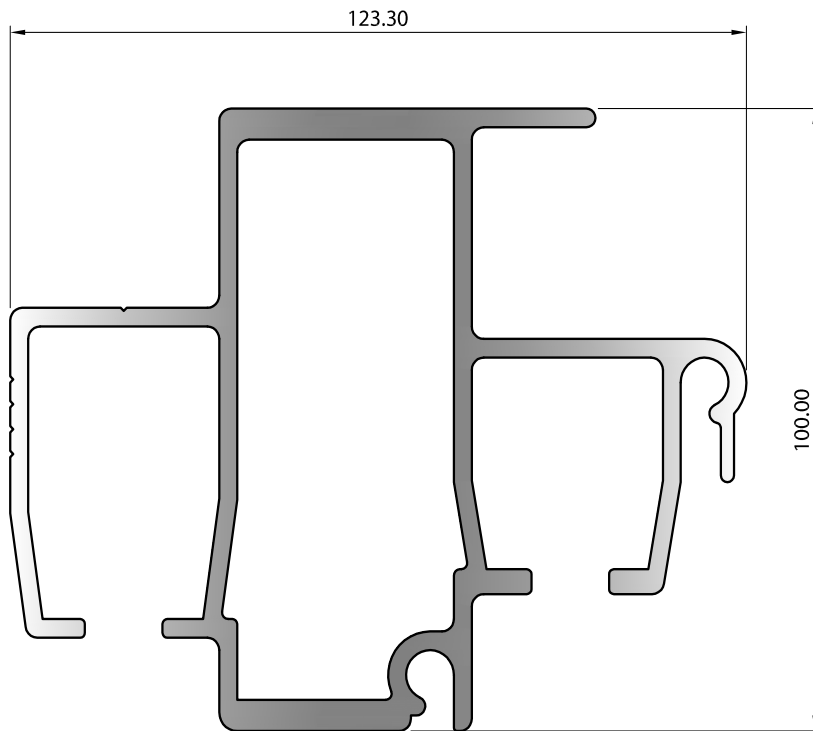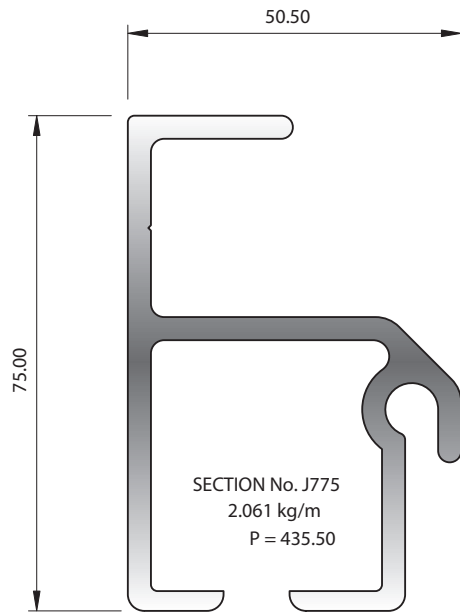



McKechnie®
Transforming Aluminium

Headboard and Rub Rails Group 5.14.1

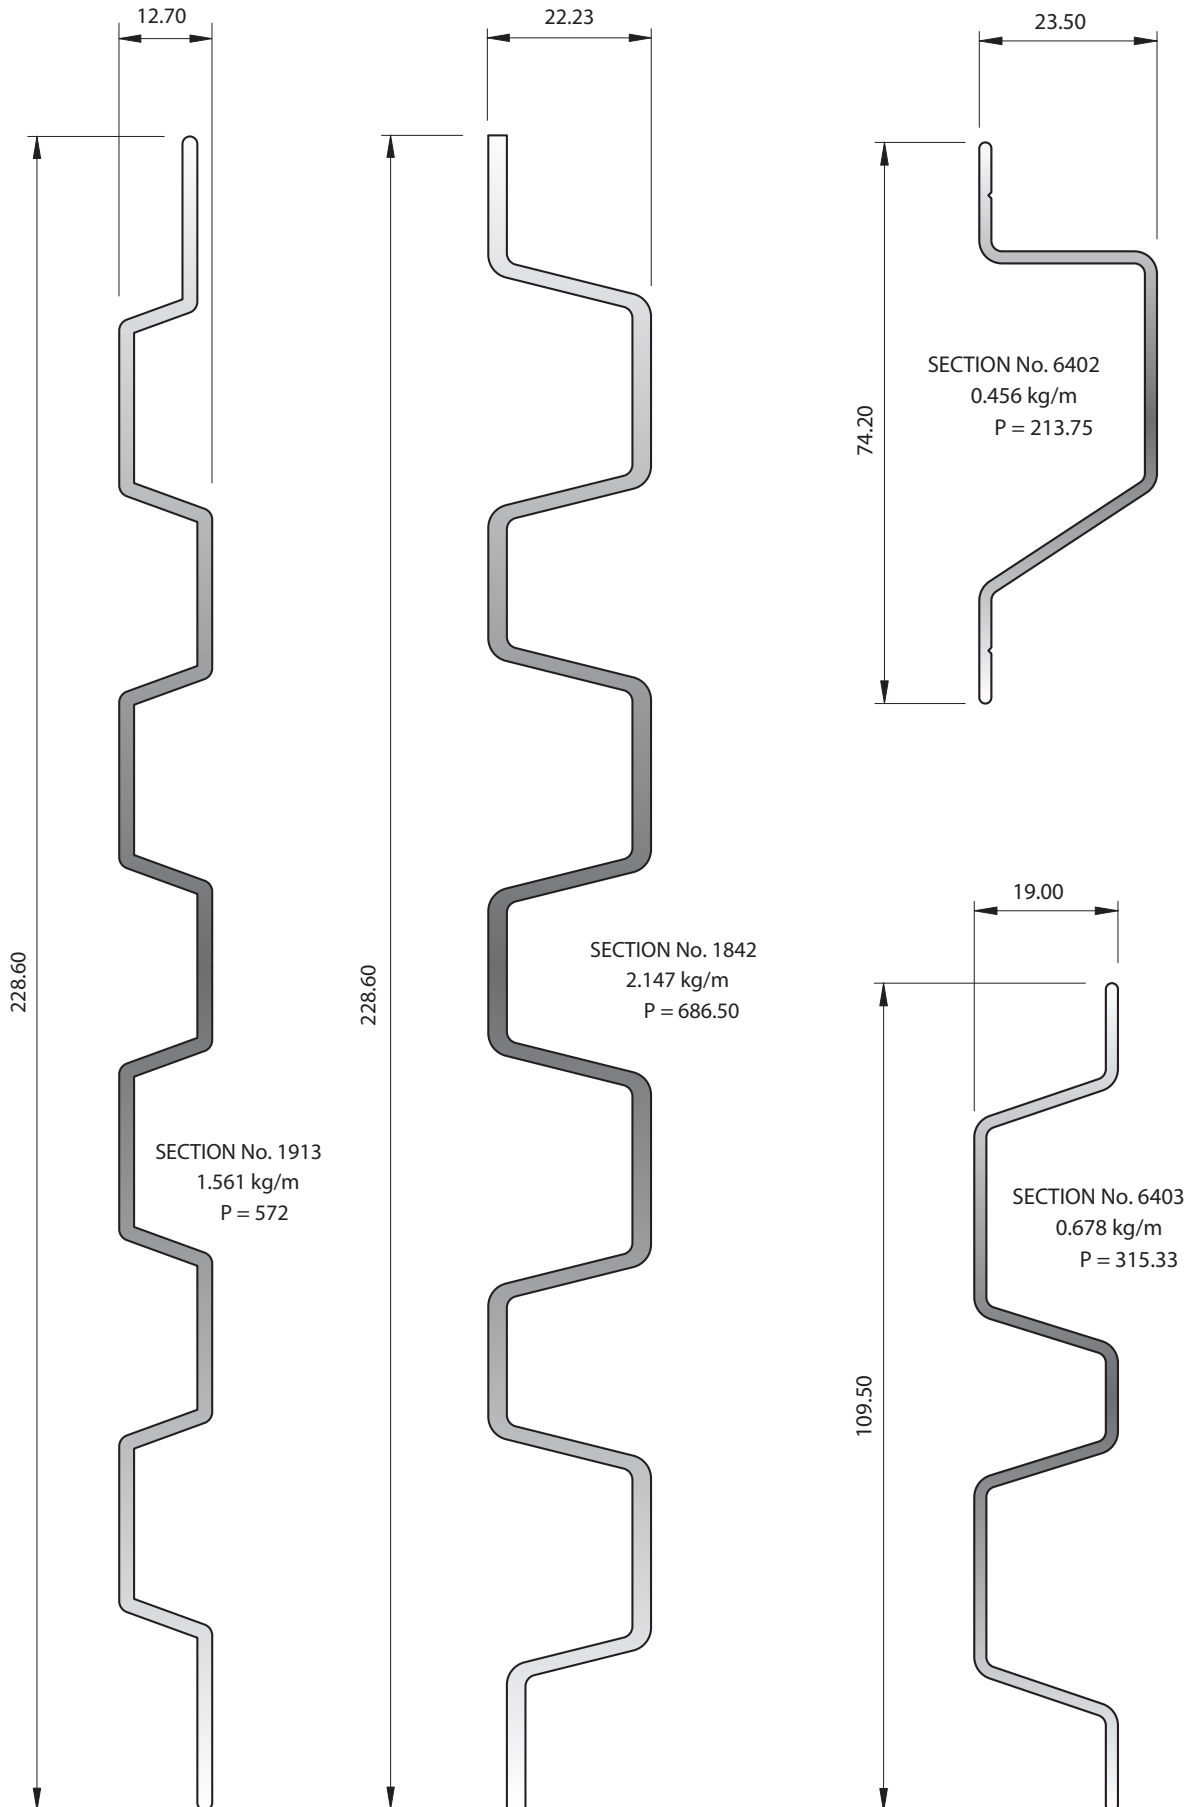


Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium


Cargo Van Sections Group 5.15.1

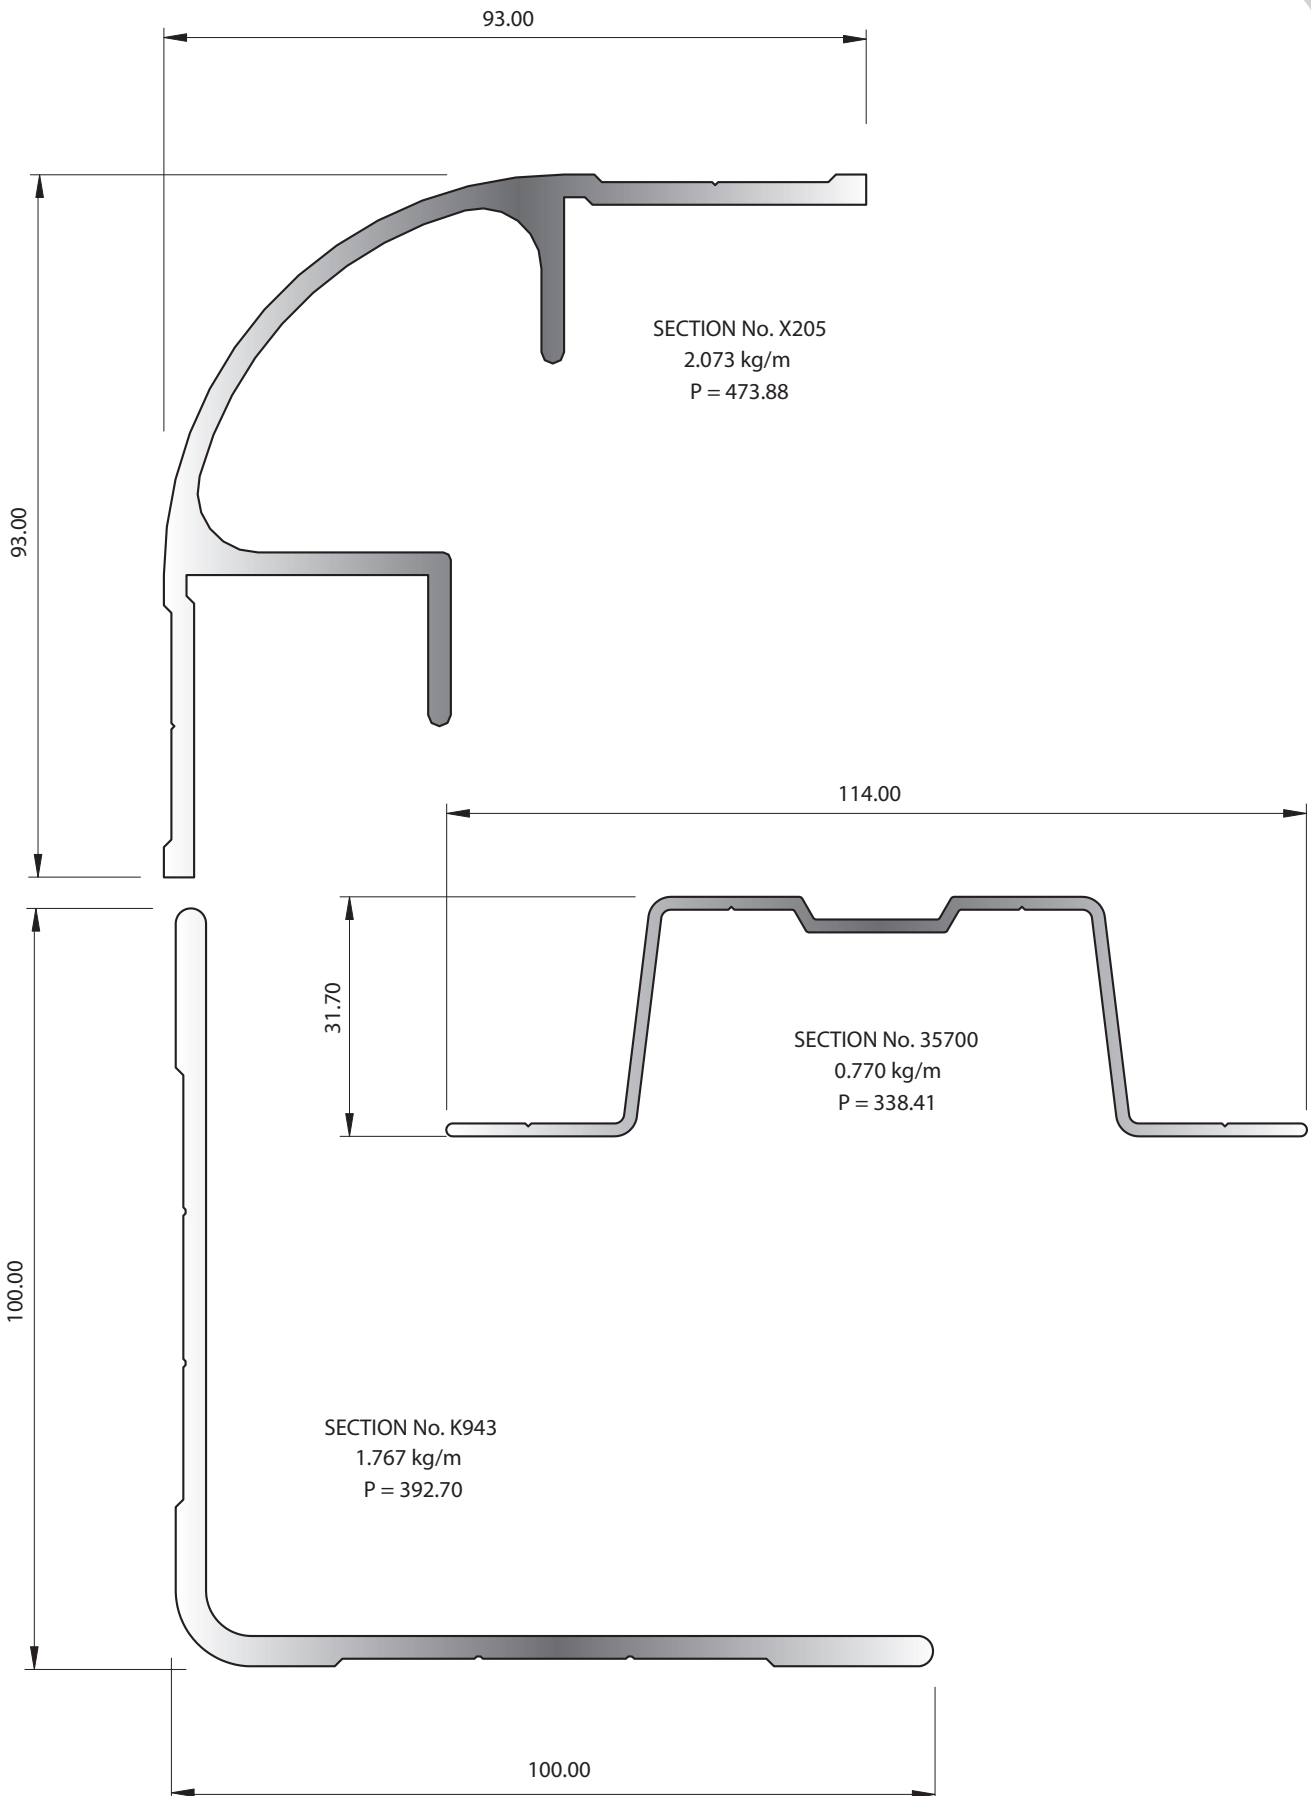



McKechnie®
Transforming Aluminium

Cargo Van Sections Group 5.15.2

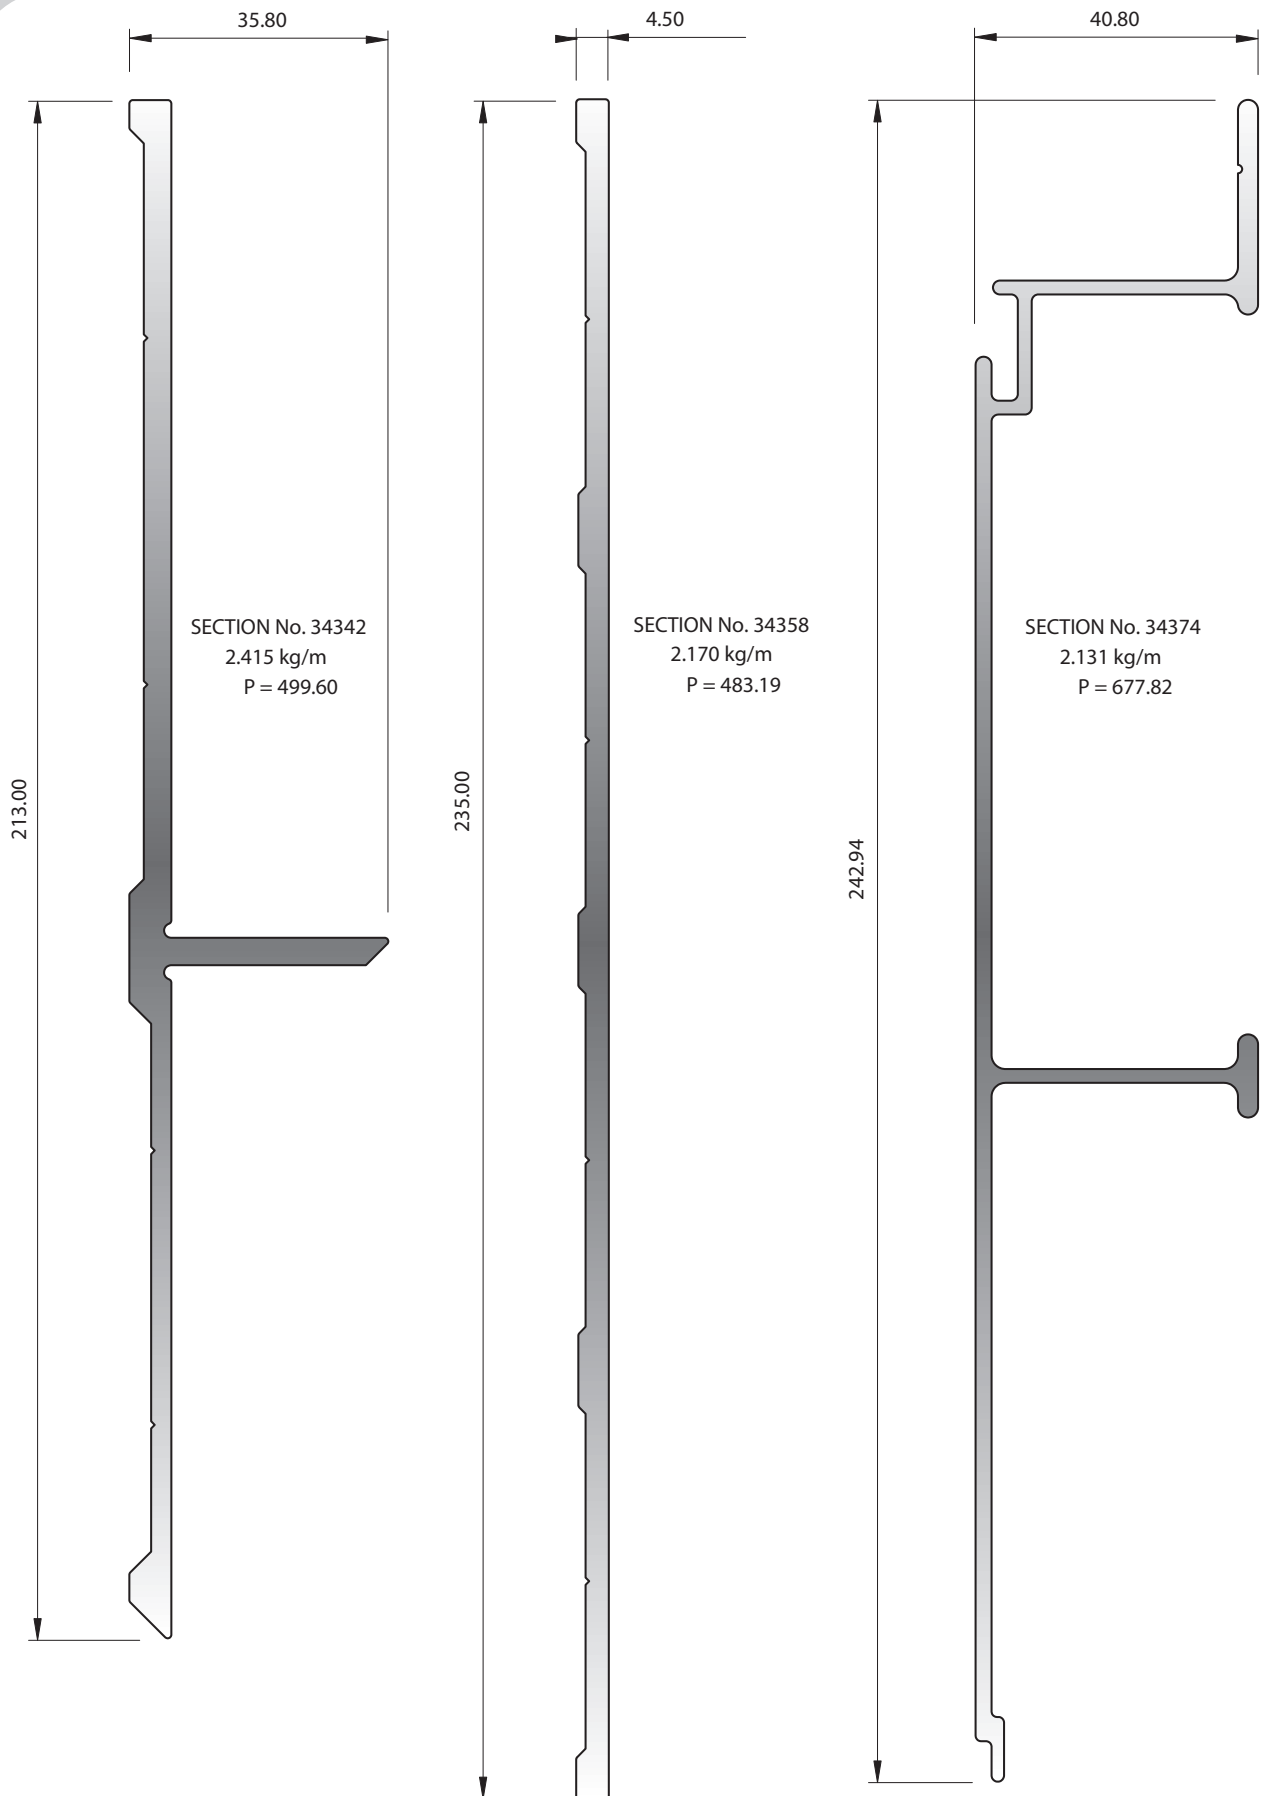


Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.




McKechnie®
Transforming Aluminium


Cargo Van Sections Group 5.15.3

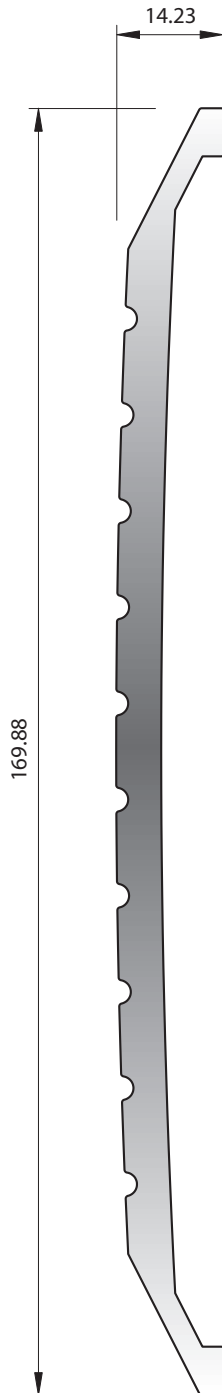

SECTION No. 0750
2.458 kg/m
P = 376

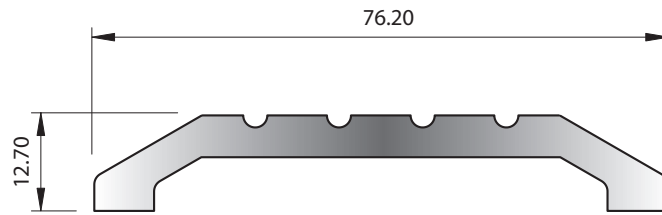

SECTION No. 0732
1.154 kg/m
P = 181



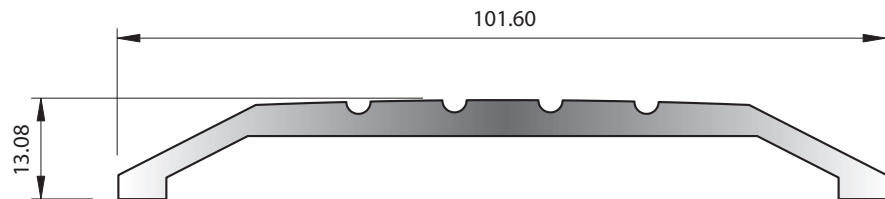


SECTION No. 0749
1.171 kg/m
P = 229




McKechnie®
Transforming Aluminium

Air Flow Flooring Group 5.16.1

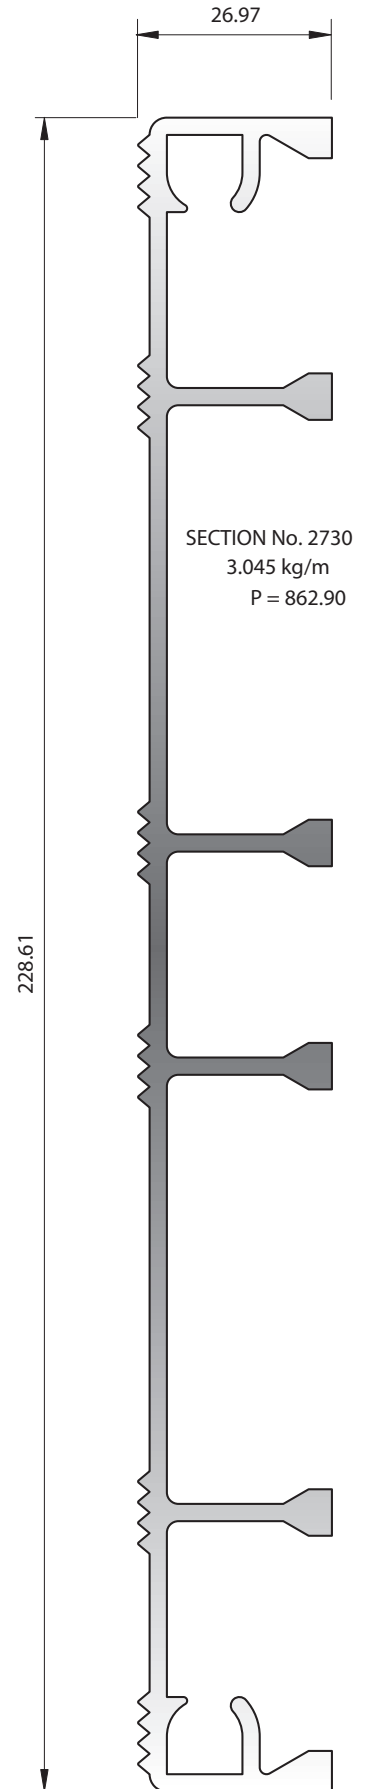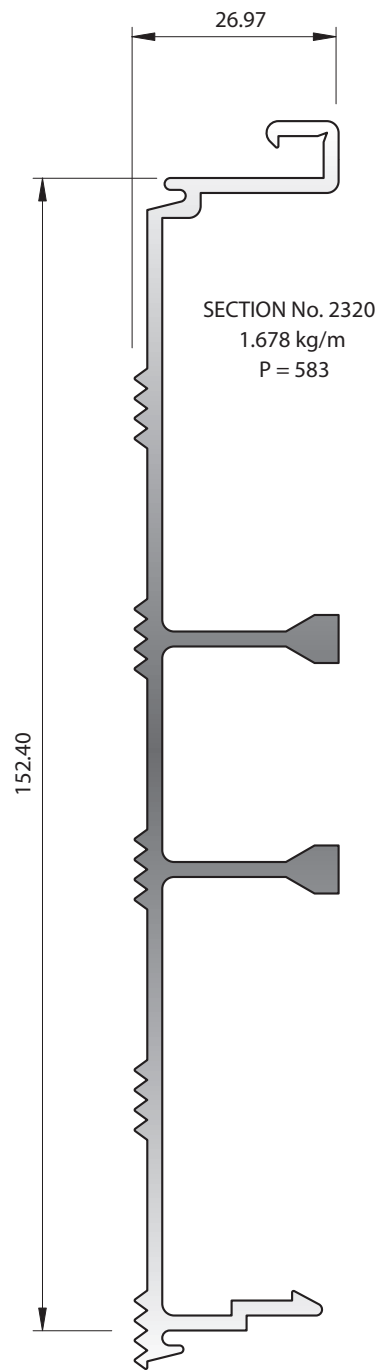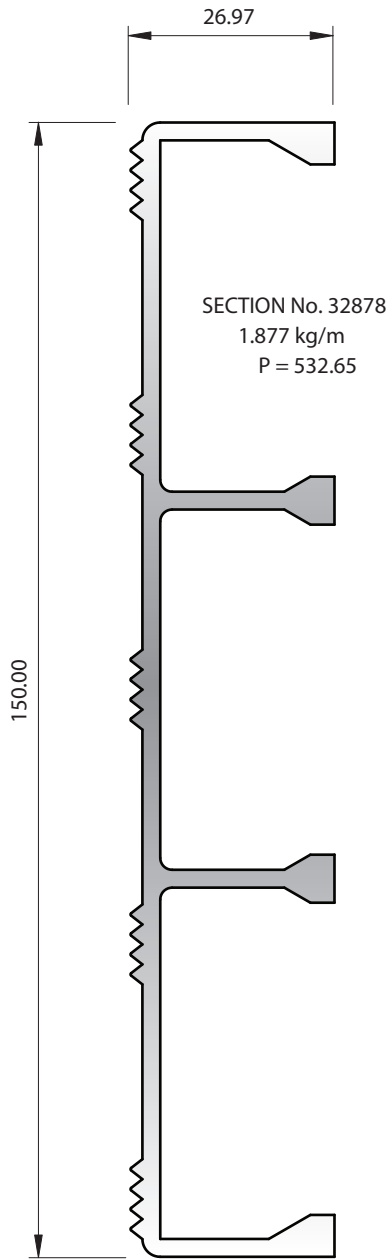

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.

Miscellaneous Transport Group 5.17.1

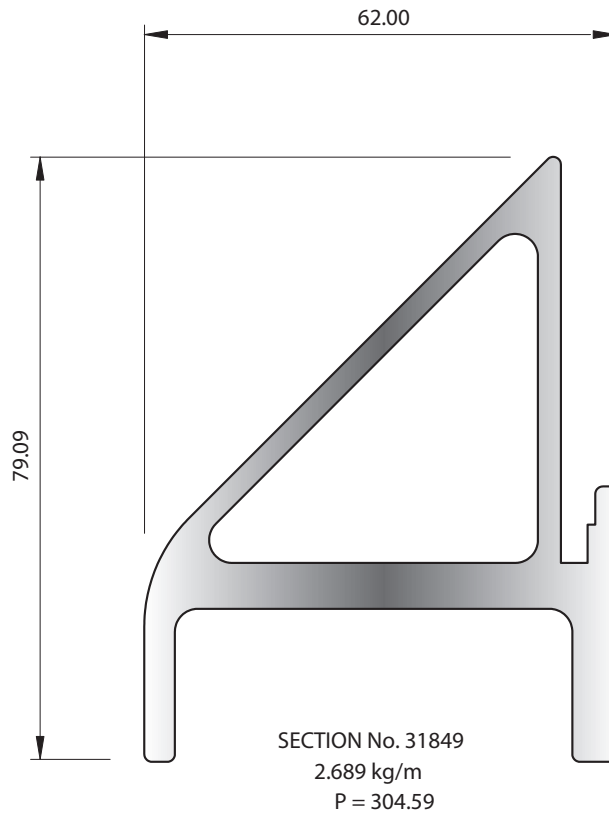




Miscellaneous


McKechnie®
Transforming Aluminium






McKechnie®
Transforming Aluminium

Cable Ladders Group Misc 1.1.1

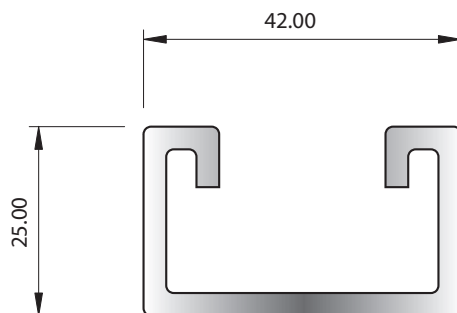

SECTION No. 5088
0.891 kg/m
P = 220

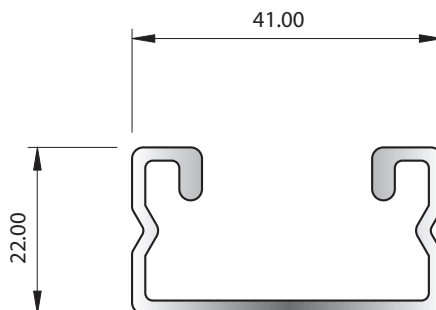


SECTION No. 8774*
0.542 kg/m
P = 211.72

* SOME SPECIAL TOLERANCES APPLY

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.


Picture Frames Group Misc 2.1.1



SECTION No. 9339


0.186 kg/m

P = 106.37



McKechnie®
Transforming Aluminium

Signs Group Misc 3.1.1

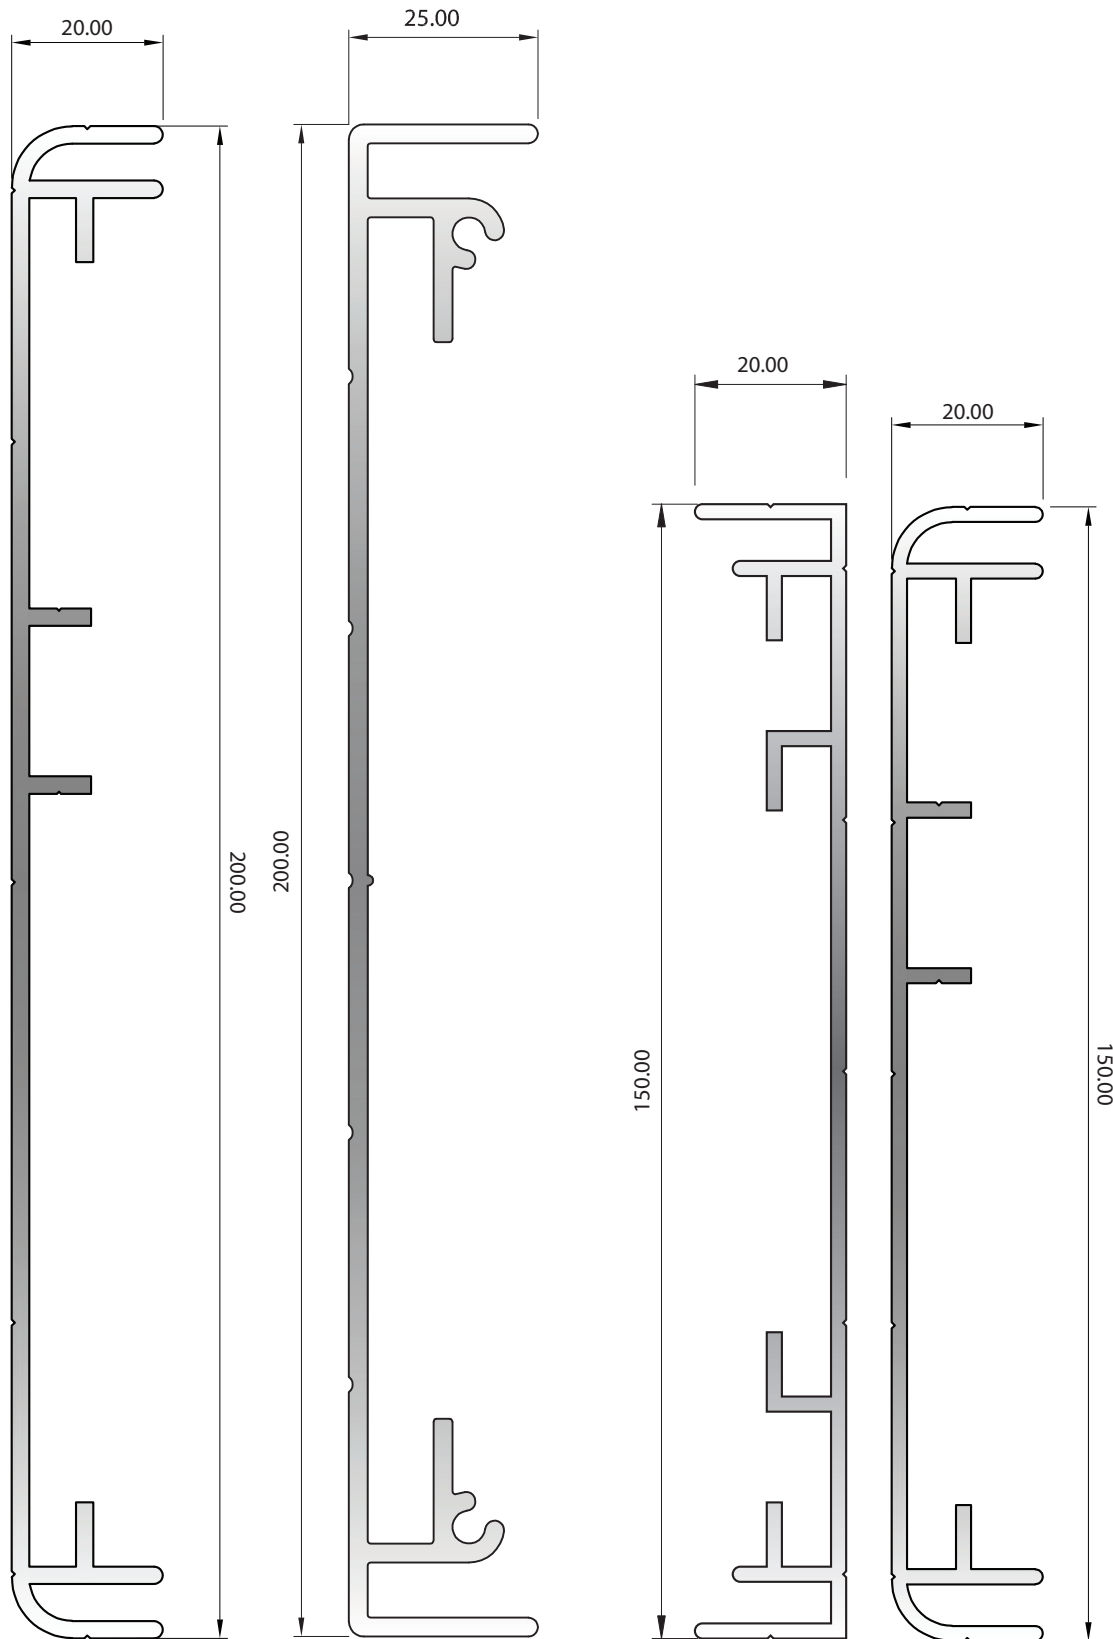

SECTION No. 35243
1.850 kg/m
P = 599.95

SECTION No. 37029
2.177 kg/m
P = 640.47

SECTION No. X540
1.418 kg/m
P = 528.89



SECTION No. 35242
1.346 kg/m
P = 503.49

Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements. Please contact your Key Account Manager or McKechnie customer services for more information.




McKechnie®
Transforming Aluminium

Signs Group Misc 3.1.2

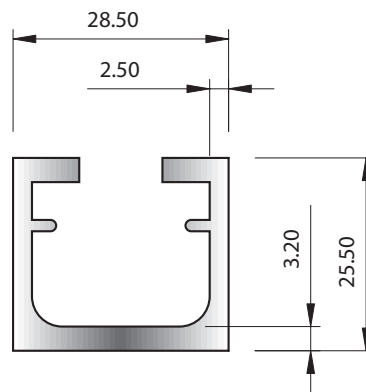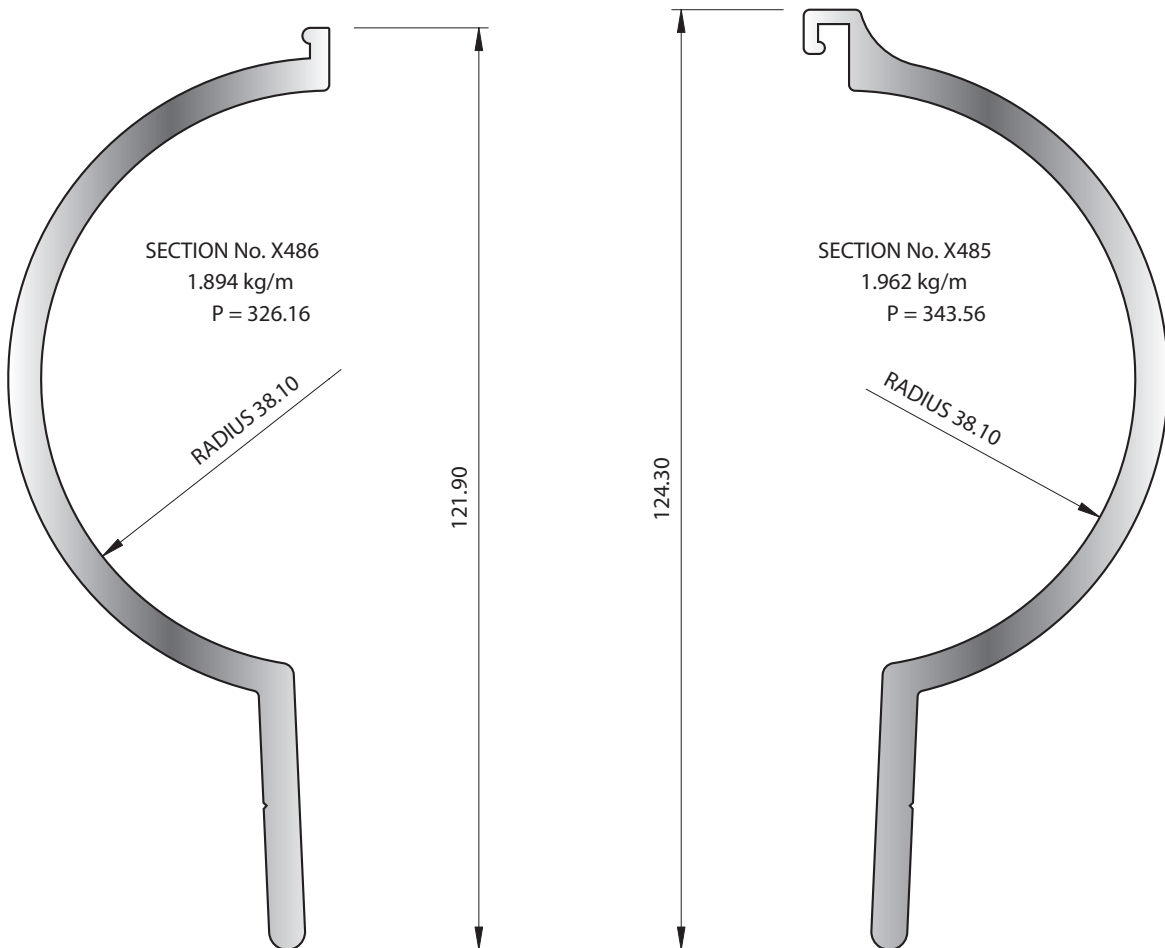


SECTION No. 9372
0.698 kg/m
P = 186



McKechnie®
Transforming Aluminium

Signs Group Misc 3.1.3

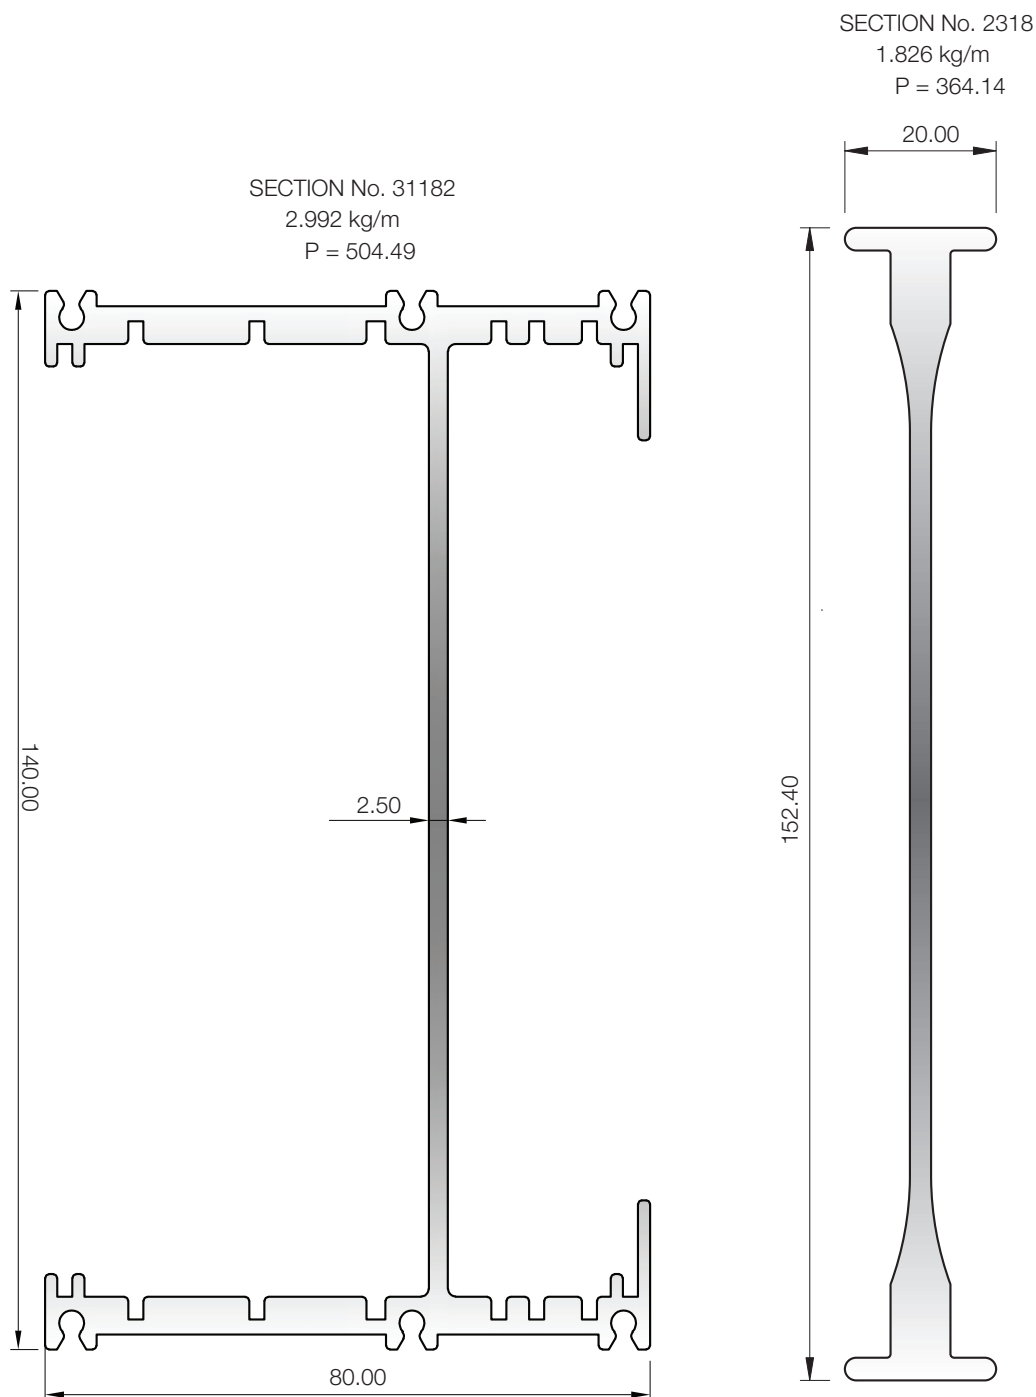


Restrictions on available alloys apply to some products depending on weight, complexity and surface finish requirements.
Please contact your Key Account Manager or McKechnie customer services for more information.




McKechnie®
Transforming Aluminium

Miscellaneous Yacht Mast 4.1

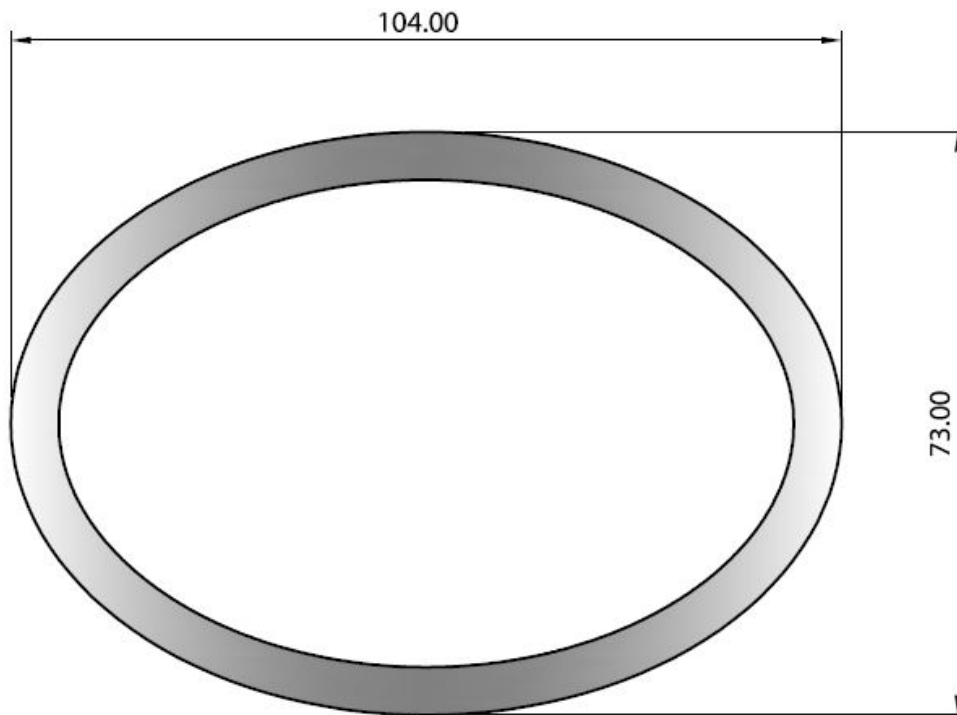


SECTION 34035
4.243 kg/m
Ext. P = 280.14

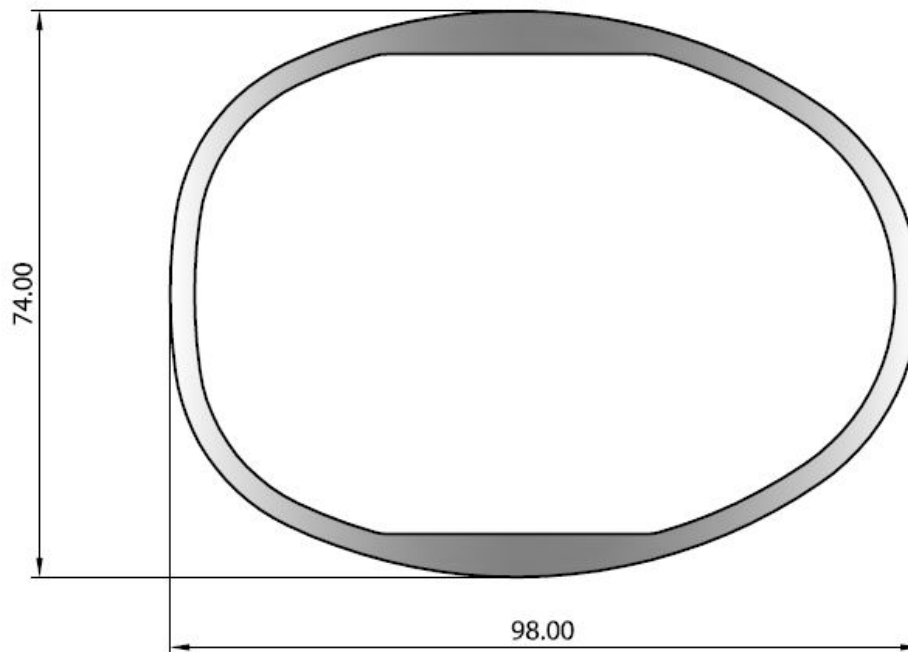


SECTION No. 35010
2.629 kg/m
Ext. P = 276.63




Miscellaneous Group Misc 5.1.1

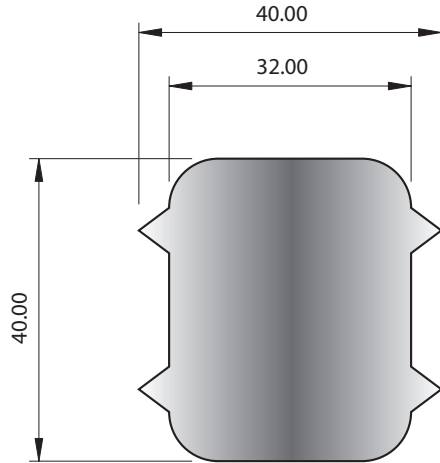


SECTION No. 8251
3.487 kg/m
P = 148.83

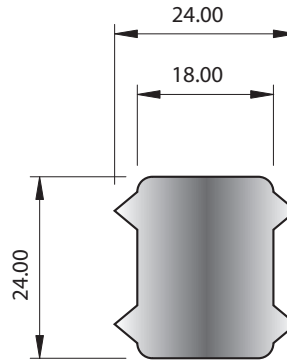

SECTION No. 8250
1.238 kg/m
P = 91.80

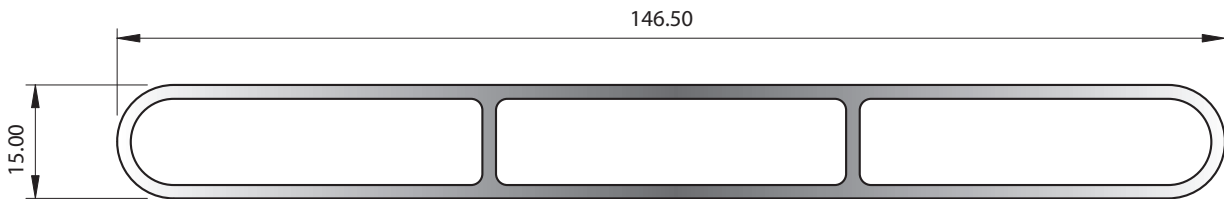

SECTION No. N592
1.607 kg/m
Ext. P = 310.10

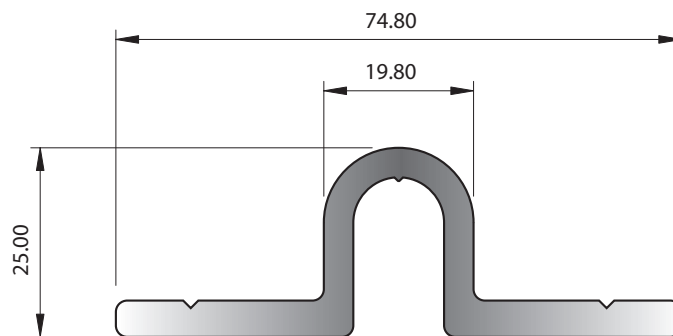


SECTION No. Z279
1.289 kg/m
P = 225.03




McKechnie®
Transforming Aluminium

Miscellaneous Group Misc 5.1.2

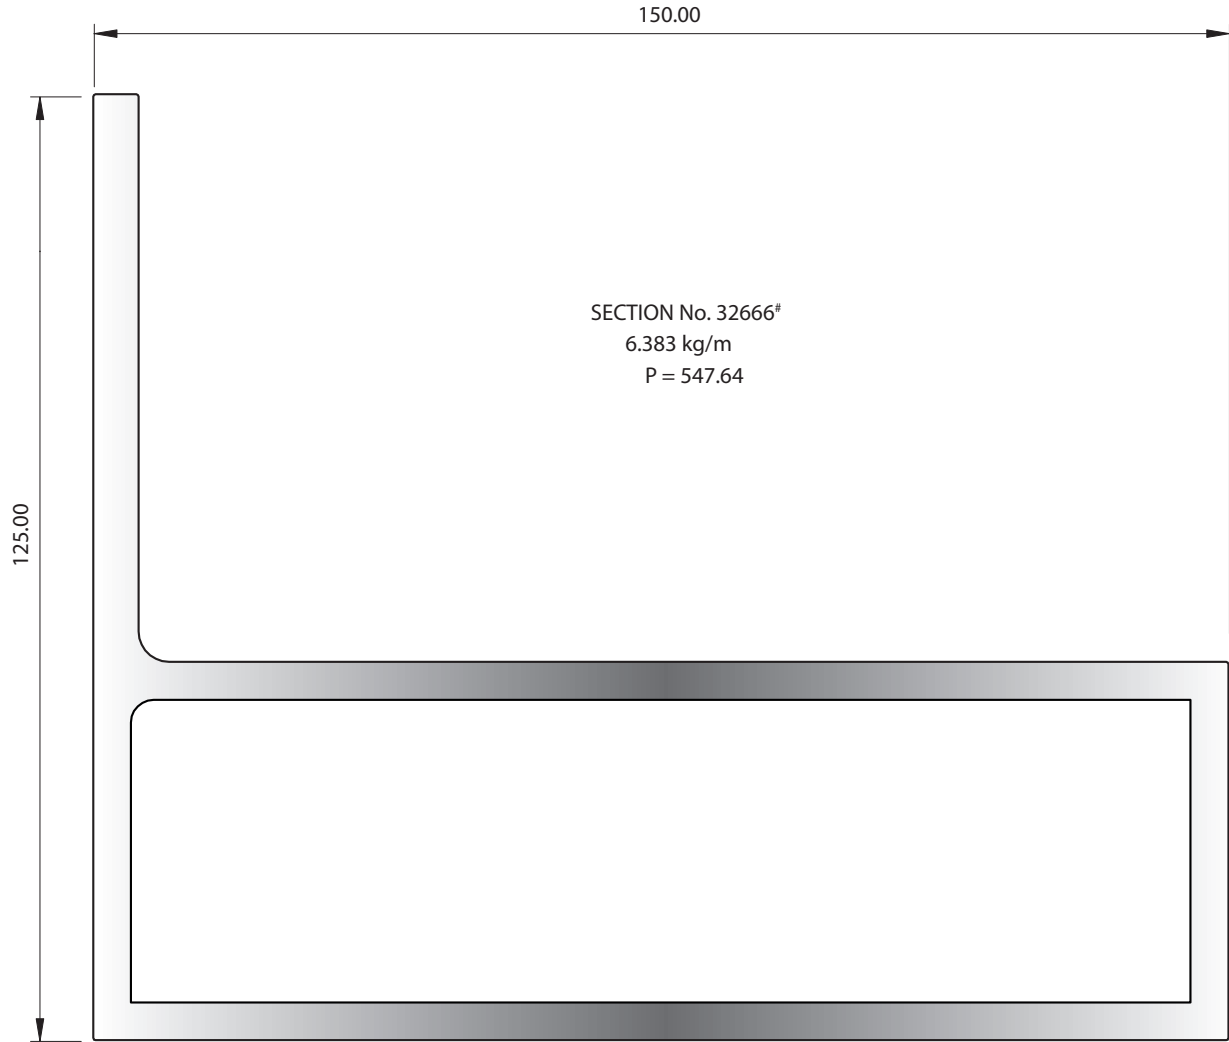


These products may be subject to special conditions. These may include minimum order quantities, wider supply tolerances or pricing extras. Please contact your Key Account Manager or McKechnie customer services for more information.



McKechnie®
Transforming Aluminium


Miscellaneous Group Misc 5.1.3

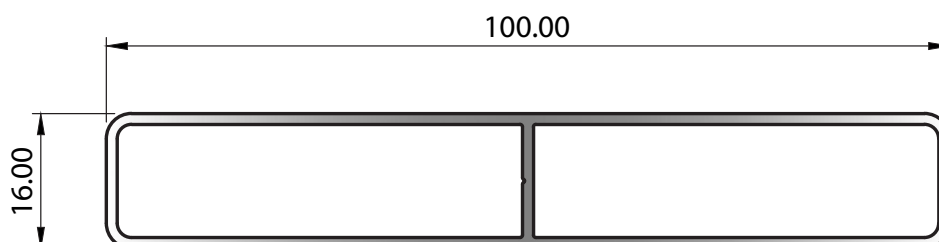

SECTION No. 38523

0.832 kg/m

P = 226.85

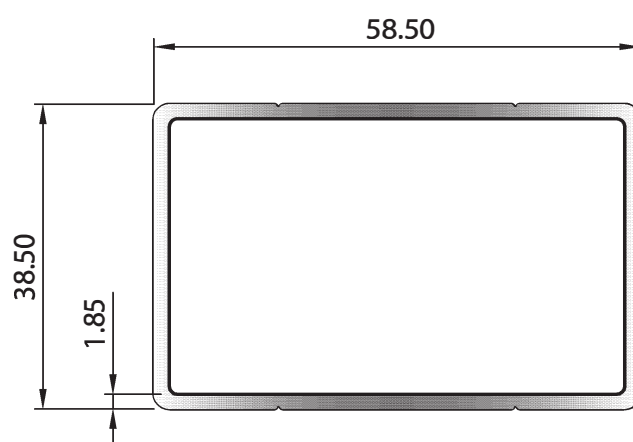

SECTION No. 38431

0.926 kg/m

P = 191.9




McKechnie®
Transforming Aluminium

Index



Index



McKechnie®
Transforming Aluminium


SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM
0273	42	0.351	79.10	0749	168	1.171	229.00	2131	149	0.694	176.19
0275	42	0.153	53.30	0750	113	2.458	376.00	2184	60	0.517	221.21
0278	29	0.101	50.80	0750	168	2.458	376.00	2207	53	0.789	200.00
0285	29	1.661	200.58	0765	34	0.143	72.80	2303	29	1.633	203.20
0288	36	1.900	288.80	0785	125	0.153	90.00	2313	33	0.845	203.20
0289	36	2.738	285.60	0825	148	0.338	110.00	2318	177	1.826	364.14
0291	37	3.740	385.90	0864	41	0.233	43.50	2320	169	1.678	583.00
0297	58	0.727	212.69	0877	63	0.518	122.08	2386	33	2.085	254.00
0320	38	0.163	34.90	0914	46	1.417	177.80	2418	59	1.361	424.00
0322	38	0.407	73.00	0939	38	0.137	43.38	2601	33	3.810	457.20
0336	42	0.121	35.40	0954	60	0.988	357.00	2730	169	3.045	862.90
0340	38	0.326	60.30	0975	70	0.133	66.00	2776	37	4.113	650.90
0360	121	0.493	155.00	1023	47	3.484	228.60	2781	31	0.411	101.60
0371	34	0.226	71.10	1025	30	3.423	402.50	2974	140	0.387	114.31
0377	34	0.288	77.00	1026	30	4.371	352.00	3301	40	4.355	279.40
0382	34	0.305	115.00	1100	123	0.124	50.00	3470	34	0.190	92.10
0410	53	0.187	66.00	1122	33	3.710	301.50	3620	40	5.245	330.20
0410	70	0.187	66.00	1123	53	1.676	198.00	3688	124	0.811	389.00
0433	49	0.928	271.92	1172	94	1.886	304.00	3779	29	0.321	152.00
0460	31	0.388	102.00	1181	31	0.653	88.90	3882	102	1.569	563.80
0500	36	0.984	233.60	1184	53	1.284	198.00	3898A	150	2.900	584.92
0504	36	1.235	229.00	1229	92	0.630	295.78	4087	35	0.967	244.00
0506	39	0.651	111.10	1231	38	0.082	25.40	4478	53	0.410	101.60
0529	39	1.961	171.50	1324	44	0.842	197.70	4519	59	0.256	124.00
0531	40	3.484	228.60	1338	29	1.242	203.20	4575	35	0.559	144.00
0537	38	0.654	69.90	1362	38	1.634	108.00	4760	37	3.915	590.00
0572	29	0.753	127.00	1442	37	1.690	400.00	4870	53	0.382	100.00
0580	57	0.776	181.30	1468	44	0.933	177.80	4892	160	1.942	525.05
0582	58	0.323	153.00	1478	53	2.123	248.10	4895	102	0.595	278.45
0630	38	0.494	85.80	1508	57	1.811	422.70	4954	38	0.325	52.00
0632	41	0.195	42.60	1605	37	1.253	298.40	4969	104	0.703	329.25
0634	38	1.089	88.90	1631	148	0.553	119.00	4978	41	3.382	147.25
0637	53	0.458	135.75	1652	37	5.193	536.90	4980	41	5.420	240.00
0637	70	0.458	135.75	1658	33	1.601	251.06	4987	38	0.310	82.20
0656	200	1.180	223.00	1754	138	1.999	312.00	4989	39	0.620	158.40
0657	29	0.627	152.40	1770	35	0.161	79.40	4996	38	0.601	88.20
0687	60	1.333	316.00	1790	46	1.853	228.60	4999	38	1.029	87.50
0692	30	2.098	251.20	1826	125	0.091	68.19	5000	39	2.057	151.00
0719	43	0.461	96.10	1842	165	2.147	686.50	5001	39	2.469	176.40
0732	113	1.154	181.00	1864	39	0.384	95.25	5003	29	0.182	50.80
0732	168	1.154	181.00	1908	30	5.055	402.48	5005	29	0.389	101.60
0733	121	0.489	152.94	1913	165	1.561	572.00	5006	29	0.492	127.00
0734	32	1.086	177.80	2089	62	0.187	97.00	5009	30	1.210	304.80
0749	113	1.171	229.00	2114	35	0.717	183.00	5011	29	0.565	100.60

All peripheries less than 100mm are deemed 100mm for surface finish purpose

Index

SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM
5012	29	0.871	152.40	5917	44	1.523	200.00	6136	132	0.150	72.23
5013	29	1.180	203.20	5931	31	0.286	109.57	6179	130	0.450	194.42
5014	29	0.703	101.60	5968	29	0.170	48.00	6209	34	0.439	135.00
5018	30	2.372	304.80	5969	29	0.235	64.00	6256	134	2.278	464.16
5021	40	6.775	250.00	5970	31	0.235	64.00	6276	35	0.405	125.00
5081	59	1.798	358.00	5971	31	0.275	74.00	6330	36	0.370	185.00
5088	173	0.891	220.00	5972	29	0.300	80.00	6331	80	0.611	304.95
5112	38	0.540	66.00	5973	29	0.381	100.00	6350	107	0.518	127.00
5113	41	0.675	70.00	5974	31	0.437	114.00	6357	38	0.432	88.00
5179	38	0.516	75.50	5975	29	0.333	160.00	6373	39	0.648	166.00
5323	32	0.585	150.00	5976	29	0.624	160.00	6374	36	1.409	354.00
5386	125	0.134	84.00	5977	29	0.786	200.00	6402	165	0.456	213.75
5396	151	2.721	552.99	5978	34	0.142	68.80	6403	165	0.678	315.33
5424	30	3.485	304.80	5979	34	0.194	92.80	6421	29	0.100	48.00
5509	32	0.275	130.00	5980	34	0.437	114.00	6428	32	0.403	190.00
5510	29	0.210	100.00	5982	35	0.599	154.00	6452	35	0.680	174.00
5511	31	0.188	90.00	5983	35	0.761	194.00	6476	35	0.801	204.00
5512	29	0.167	80.00	5984	35	1.166	294.00	6484	29	0.425	200.00
5513	31	0.154	73.00	5985	53	0.166	80.00	6488	131	0.260	171.55
5514	31	0.132	64.00	5986	53	0.300	80.00	6489	34	0.211	100.00
5581	102	0.429	181.58	5987	53	0.209	100.00	6490	47	2.008	260.00
5584	107	0.987	340.00	5988	53	0.624	160.00	6497	137	0.329	108.00
5590	34	0.167	85.70	5989	38	0.087	43.20	6595	148	0.221	95.94
5590	64	0.167	85.70	5991	38	0.130	38.00	6614	43	0.404	100.00
5620	109	0.484	157.03	5992	38	0.162	46.00	6634	46	0.945	150.00
5622	108	1.299	214.50	5993	38	0.203	56.00	6669	47	1.626	250.00
5645	30	1.797	304.80	5994	39	0.405	106.00	6670	31	0.239	114.00
5653	109	0.166	97.50	5995	40	0.810	206.00	6706	38	0.648	92.00
5662	39	1.234	164.40	5996	38	0.405	62.00	6726	99	1.066	387.00
5663	130	0.351	143.50	5997	39	0.810	112.00	6788	33	0.988	250.00
5706	100	0.126	77.00	5998	40	1.620	212.00	6815	46	0.874	185.00
5723	35	0.291	147.00	5999	38	0.810	74.00	6820	33	0.894	226.00
5726	34	0.197	93.00	6000	39	1.620	124.00	6852	38	1.960	114.00
5727	31	0.218	104.00	6001	40	3.240	224.00	6854	32	0.291	138.00
5728	43	0.301	76.00	6059	44	0.778	152.00	6856	120	0.143	48.00
5743	38	1.231	100.00	6076	32	0.462	120.00	6864	126	0.235	146.00
5766	29	0.115	60.00	6077	38	0.324	86.00	6868	137	4.730	489.18
5780	39	4.355	177.80	6100	109	1.961	313.49	6944	36	2.347	352.40
5781	39	5.226	203.20	6107	31	0.334	104.00	6945	36	1.257	238.28
5784	40	10.452	355.60	6114	44	1.054	203.20	6947	43	0.875	120.00
5845	32	0.399	200.00	6114	45	1.054	203.20	6948	32	1.237	202.00
5854	66	0.942	278.00	6128	36	0.842	214.00	6982	37	3.046	387.00
5903	32	0.317	150.00	6130	148	0.148	76.00	6983	36	1.008	254.00
5916	46	0.767	150.00	6136	109	0.150	72.23	7015	40	3.078	248.00

All peripheries less than 100mm are deemed 100mm for surface finish purpose



Index

McKechnie®
Transforming Aluminium


SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM
7040	39	1.296	172.00	8515	39	2.160	180.00	9339	174	0.186	106.37
7051	89	0.565	283.00	8516	40	2.592	332.00	9368	41	0.342	69.77
7059	37	3.816	454.00	8517	32	0.502	130.00	9372	176	0.698	186.00
7060	37	7.408	637.22	8518	29	1.523	200.00	9406	46	0.470	120.80
7084	32	0.205	104.00	8521	35	0.616	158.00	9432	40	5.184	344.00
7288	38	0.367	76.00	8570	78	0.501	226.56	9433	46	1.118	150.00
7360	81	0.463	182.84	8589	39	3.645	186.00	9482	34	0.245	116.00
7389	53	0.340	160.00	8590	39	2.835	178.00	9517	92	0.806	390.00
7392	40	1.080	204.00	8706	88	1.286	462.80	9518	90	0.976	434.00
7425	39	1.350	120.00	8713	33	7.077	535.00	9519	91	0.784	296.00
7426	39	1.080	100.00	8716	36	1.166	294.00	9520	90	0.897	415.00
7439	71	0.298	92.00	8776	39	0.972	132.00	9530	29	1.199	160.00
7468	39	1.080	116.00	8777	43	0.530	74.85	9586	33	0.658	200.00
7509	149	1.046	210.62	8778	43	0.695	94.85	9590	78	0.534	244.00
7524	40	3.562	450.28	8950	43	0.300	80.00	9608	40	4.320	340.00
7524	41	3.562	450.28	8953	35	0.729	186.00	9609	43	0.189	50.80
7556	39	8.129	229.14	8955	148	0.279	129.99	9675	43	0.346	95.90
7556	41	8.129	229.14	8957	80	0.643	266.00	9677	35	0.332	156.80
7603	49	3.575	471.00	8966	123	0.143	47.70	9698	97	0.650	254.00
7652	47	1.691	220.00	9004	49	6.148	605.00	9699	104	2.914	311.40
7752	99	1.808	318.23	9051	122	0.102	54.00	9741	38	0.194	36.00
7754	97	0.267	149.88	9055	79	0.873	470.00	9742	39	2.592	184.00
7757	104	0.384	199.13	9056	79	0.324	203.00	9743	29	0.948	240.00
7771	98	1.532	240.00	9069	34	0.486	126.00	9744	30	2.495	320.00
7791	78	0.762	302.27	9126	112	1.582	296.00	9745	32	0.397	104.00
7841	43	0.596	115.70	9126	134	1.582	296.00	9746	44	1.283	200.00
7955	47	2.252	290.00	9192	44	1.555	160.00	9751	39	2.160	120.00
8039	129	0.768	240.30	9193	44	0.647	154.85	9752	35	0.410	156.00
8042	47	0.836	200.00	9322	29	0.091	48.00	9753	32	0.664	170.00
8069	49	2.599	378.30	9323	31	0.124	64.00	9754	41	1.275	166.80
8071	101	1.168	391.00	9324	29	0.156	80.00	9775	139	0.494	150.10
8136	88	0.281	157.00	9325	31	0.144	74.00	9776	39	2.700	129.70
8136	97	0.281	157.00	9326	31	0.176	90.00	9777	39	1.944	143.70
8163	107	1.732	292.18	9327	29	0.196	100.00	9780	30	1.847	239.50
8164	108	2.232	409.78	9328	31	0.205	104.00	9781	33	0.786	199.50
8165	108	2.285	363.32	9329	32	0.237	120.00	9782	33	1.393	349.50
8166	111	1.325	260.46	9330	32	0.257	130.00	9784	43	0.713	99.70
8167	107	0.131	81.99	9331	29	0.318	160.00	9785	46	0.810	129.70
8174	81	0.831	260.61	9332	32	0.298	150.00	9816	144	4.860	654.00
8250	179	1.238	91.80	9333	29	0.399	200.00	9822	47	1.210	232.00
8251	179	3.487	148.83	9334	32	0.379	190.00	9862	39	4.320	200.00
8266	33	0.992	250.00	9335	35	0.310	146.80	9944	105	2.596	749.11
8333	40	2.700	220.00	9336	38	0.108	53.20	9985	47	2.341	300.00
8459	32	0.252	120.00	9337	38	0.259	70.00	9987	110	1.617	268.10

All peripheries less than 100mm are deemed 100mm for surface finish purpose

Index

SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM
17231	45	4.615	596.57	31576	35	1.268	318.00	33388	29	0.496	128.00
30080	40	2.195	282.00	31708	30	3.154	400.00	33389	29	0.097	48.00
30139	49	4.209	579.42	31820	47	1.884	228.60	33397	45	2.318	294.50
30193	33	0.789	200.00	31849	170	2.689	304.59	33401	29	0.459	152.00
30196	44	0.811	155.88	31878	45	1.965	299.66	33423	129	0.744	227.67
30208	46	0.357	88.82	31882	111	2.072	384.15	33445	109	0.373	177.47
30209	45	1.102	259.25	31966	139	0.515	156.98	33465	35	0.472	122.00
30210	45	1.017	238.63	32003	44	1.883	155.71	33479	44	1.022	194.85
30211	43	0.187	61.25	32044	96	0.679	184.00	33567	39	3.049	140.00
30240	47	1.967	251.42	32099	35	0.207	105.00	33601	148	0.194	103.12
30252	33	3.621	350.00	32252	33	1.528	290.00	33602	127	0.353	178.41
30299	104	0.399	212.14	32447	44	1.508	194.85	33603	127	0.278	141.75
30319	56	3.999	471.24	32507	95	1.453	309.37	33604	127	0.742	275.99
30388	48	5.783	441.42	32508	94	2.962	406.69	33605	127	0.160	91.28
30485	46	0.878	120.00	32520	44	2.439	189.70	33620	41	0.132	41.03
30486	46	0.493	120.00	32561	38	0.678	70.00	33627	132	0.483	217.96
30487	36	0.967	244.00	32565	44	1.510	194.85	33628	132	0.936	295.94
30497	46	0.932	180.00	32605	139	0.540	262.43	33629	132	0.483	217.75
30524	33	0.522	260.00	32662	57	1.790	440.14	33630	132	1.200	369.10
30543	30	2.341	300.00	32663	156	1.862	548.36	33669	47	0.508	159.42
30624	46	0.776	104.85	32664	152	1.073	243.56	33713	47	2.748	350.00
30752	47	2.307	293.13	32664	153	1.073	243.56	33721	45	2.504	320.00
30771	106	0.511	247.49	32664	175	1.073	243.56	33919	33	3.561	450.00
30772	106	0.380	202.94	32666	180	6.383	547.64	33972	40	2.033	310.00
30815	50	3.755	131.95	32706	40	3.469	336.00	34020	40	1.658	413.14
30835	39	1.073	144.00	32716	33	2.371	360.00	34020	41	1.658	413.14
30837	47	1.203	229.31	32734	44	2.411	193.13	34033	33	0.951	240.00
30962	40	1.762	270.00	32878	169	1.877	532.65	34035	178	4.243	280.14
30982	30	4.086	317.42	32932	158	1.226	315.19	34044	30	3.154	400.00
30999	31	0.341	90.00	32957	43	0.553	80.00	34048	47	3.079	300.00
31017	64	0.170	98.88	32961	43	0.390	80.00	34050	113	0.809	304.98
31018	69	0.139	81.16	33022	47	1.305	246.57	34080	36	0.629	235.85
31043	32	0.545	140.00	33034	38	0.081	26.00	34296	47	2.179	280.00
31117	53	2.357	293.99	33041	29	1.165	199.57	34342	167	2.415	499.60
31182	177	2.992	504.49	33066	33	1.195	300.00	34343	77	1.244	194.85
31274	53	2.168	330.00	33143	111	1.626	247.85	34358	167	2.170	483.19
31299	40	1.341	229.00	33268	44	2.768	189.10	34374	167	2.131	677.82
31300	47	1.056	250.00	33270	37	7.162	531.42	34406	46	0.751	144.85
31346	87	0.714	355.15	33272	48	5.301	339.10	34414	33	2.341	300.00
31347	87	0.614	304.48	33279	37	4.008	380.57	34415	45	1.796	354.85
31348	87	0.511	255.15	33318	29	1.481	200.00	34458	33	2.348	296.14
31350	44	0.990	189.01	33378	33	7.880	597.42	34509	96	0.986	243.41
31465	82	0.325	160.14	33386	47	1.303	210.00	34559	38	0.244	66.00
31476	40	4.065	320.00	33387	30	1.195	300.00	34689	132	1.521	453.62

All peripheries less than 100mm are deemed 100mm for surface finish purpose



Index

McKechnie®
Transforming Aluminium


SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM
34751	43	0.180	48.00	35962	114	0.568	287.13	39059	49	4.319	465.70
34765	46	1.204	152.40	35993	39	0.610	155.48	39125	36	1.211	302.97
34913	41	0.564	78.85	35999	33	1.935	249.48	39126	33	4.704	449.23
34955	39	1.734	175.14	36058	45	5.129	394.85	39164	37	5.431	586.31
34987	148	0.496	192.36	36089	35 + 65	1.010	252.82	39165	36	1.211	302.97
35010	178	2.629	276.63	36227	40	1.016	255.48	39274	48	6.506	699.31
35158	46	0.794	124.85	36229	53	1.528	199.23	50212	114	0.525	172.96
35159	46	0.878	120.00	36230	53	1.774	299.23	50285	114	0.552	209.91
35242	175	1.346	509.49	36231	39	2.032	169.48	34461	114	0.424	220.47
35243	175	1.850	599.95	36321	40	1.868	240.63	8774*	173	0.542	211.72
35270	36	0.456	226.37	36519	33	1.853	349.36	E122*	95	0.787	318.78
35300	114	0.429	256.70	36568	37	2.460	382.54	E210	79	1.245	463.07
35301	114	0.448	267.05	36770	57	1.277	165.71	E225	44	0.843	180.00
35302	114	0.464	275.46	36795	29	0.080	39.57	E300	40	2.341	232.00
35303	114	0.495	251.13	36814	114	0.597	329.36	E301	40	2.033	262.00
35309	46	0.959	124.85	36992	46	0.914	174.85	E319	40	1.491	230.00
35320	36	0.650	244.00	37028	122	0.178	73.52	E320	40	5.420	420.00
35360	114	0.281	183.89	37029	175	2.177	640.47	E321	40	6.504	424.00
35361	114	0.298	194.38	37044	46	0.824	160.00	E359	40	0.610	185.00
35362	114	0.315	204.74	37068	39	0.217	103.20	E531	39	0.678	110.00
35363	114	0.332	215.09	37069	114	0.617	339.71	E539	34	0.183	87.60
35364	114	0.348	225.44	37070	114	0.637	350.07	E555	156	1.568	600.17
35365	114	0.379	235.87	37078	36	6.641	508.87	E557	156	1.586	624.81
35366	114	0.397	246.26	37080	114	0.704	360.51	E564	155	1.909	708.20
35367	114	0.530	290.81	37161	32	1.583	300.00	E709	47	1.626	250.00
35368	114	0.557	308.24	37164	47	3.512	239.14	E795	40	0.407	203.00
35369	114	0.578	319.01	37209A	129	0.382	147.90	E905	46	0.623	150.00
35378	33	7.877	595.28	37559	164	4.680	770.49	E918	33	1.558	240.00
35379	41	4.063	318.28	37645	40	2.168	215.66	E927	33	2.341	300.00
35432	114	0.694	329.92	37724	114	0.754	357.52	E929	45	5.863	379.40
35469	148	0.561	160.02	38159	40	8.129	618.63	E962	158	1.800	605.57
35472	34	0.253	119.79	38185	62	0.413	100.00	G058*	98	1.057	511.10
35484	114	0.484	287.75	38186	62	0.293	100.00	G059*	98	1.398	505.10
35493	46	0.646	124.85	38431	46	0.926	191.90	G060*	104	1.295	513.70
35511	148	0.382	125.94	38431	75	0.926	191.90	G061*	103	1.531	604.65
35512	148	0.708	211.83	38431	181	0.926	191.90	G062*	97	0.579	280.67
35513	48	4.780	599.31	38523	181	0.832	226.85	G062*	103	0.579	280.67
35575	54	0.434	62.83	38585	45	0.861	196.80	G083*	97	0.927	422.42
35589	45	1.628	259.31	38601	30	1.276	319.23	G097	44	0.824	160.00
35591	31	0.369	114.00	38602	30	1.601	399.23	G210	35	0.698	211.00
35647	109	0.250	118.13	38606	45	2.766	349.70	G249	107	1.510	331.00
35700	166	0.770	338.41	38607	45	3.022	381.12	G250	107	1.470	285.12
35723	93	0.424	196.13	38931	207	0.926	191.90	G251	110	1.400	484.40
35724	93	0.799	358.46	38959	129	0.115	52.86	G252*	103	2.828	576.60

All peripheries less than 100mm are deemed 100mm for surface finish purpose

Index

SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM
G253	131	0.500	194.49	J059	123	0.157	82.90	J904	39	2.879	161.20
G338*	122	0.201	121.67	J074	31	0.341	90.00	J918	38	0.271	58.00
G348	149	0.216	111.53	J088	35	0.618	158.00	K011	47	1.252	202.00
G419	110	1.914	436.36	J089	36	1.577	394.00	K013	39	1.301	104.00
G432	47	2.079	254.00	J090	46	1.528	200.00	K014	29	0.254	128.00
G435	47	4.827	300.00	J091	39	3.469	192.00	K024*	39	0.184	98.10
G452	95	0.438	211.29	J092	38	1.355	90.00	K025	43	0.227	73.60
G466	29	0.132	64.00	J093	38	0.650	64.00	K026	44	0.623	148.60
G481	61	0.881	263.50	J105	32	0.585	220.00	K032	38	0.133	63.30
G557	46	0.355	114.00	J114	43	0.320	101.60	K033	40	0.488	184.00
G566	40	1.620	202.60	J168	34	0.116	56.80	K034	40	0.732	186.00
G567	40	2.369	208.40	J169	44	0.943	128.00	K080	126	0.176	134.94
G589	48	2.585	330.00	J211	161	1.909	627.10	K102	47	4.348	286.27
G611	110	1.998	421.05	J241	38	0.867	84.00	K111	159	2.997	751.60
G677	44	0.498	131.31	J242	35	0.927	234.00	K113	162	2.623	767.90
G705	46	1.366	180.00	J243	36	0.960	242.00	K129	29	0.824	160.00
G743	36	0.634	161.48	J309	44	0.840	200.00	K132	44	0.801	189.90
HX0100	52	0.234	34.13	J345	38	0.520	76.00	K145*	40	1.220	306.00
HX0111	52	0.290	38.46	J395	124	0.452	236.40	K308	45	1.694	260.00
HX0120	52	0.337	41.05	J403	39	0.488	126.00	K323	45	2.341	300.00
HX0127	52	0.379	43.99	J410	77	0.640	157.40	K362	43	0.650	128.00
HX0143	52	0.479	49.47	J412	77	0.314	78.30	K430	37	5.267	486.10
HX0159	52	0.592	55.01	J425	39	1.734	112.00	K496	46	0.308	98.20
HX0170	52	0.678	58.63	J426	32	0.480	124.00	K558	98	0.741	300.60
HX0190	52	0.847	65.82	J456	32	0.278	140.00	K574	82	0.287	157.90
HX0222	52	1.159	76.99	J458	36	1.252	314.00	K580	157	1.938	632.00
HX0254	52	1.514	87.86	J589	75	1.017	193.90	K582	46	0.661	130.00
HX0286	52	1.917	99.00	J650	67	1.013	275.64	K607*	126	0.226	141.20
HX0318	52	2.357	110.01	J650	112	1.013	275.64	K617	31	0.378	126.00
HX0330	52	2.556	114.32	J657	119	0.352	146.62	K650	39	1.626	140.00
HX0381	52	3.394	132.01	J679*	38	0.217	48.00	K657	53	0.238	120.00
J001	40	5.420	210.00	J681	157	1.612	330.70	K659	82	0.783	250.20
J003	39	2.710	140.00	J688*	135	1.747	338.30	K721	43	0.180	50.40
J005	47	1.860	228.60	J712	40	0.433	203.20	K731	123	0.292	70.90
J007	132	1.022	320.58	J723	39	0.347	163.20	K732	123	0.132	68.80
J029	139	0.878	340.10	J755	145	4.679	638.60	K733	137	0.420	123.33
J030	139	0.496	199.00	J775	164	2.061	435.50	K736	43	0.499	100.00
J031	139	0.191	94.00	J782	46	0.848	111.10	K747	83	0.610	304.60
J032	140	0.234	118.00	J791	38	0.097	30.00	K748	83	0.712	354.60
J041	69	2.422	366.00	J792	29	1.040	200.00	K764	163	2.563	395.60
J043	32	1.061	203.20	J845	47	1.583	300.00	K768	68	0.224	113.08
J046	154	1.549	551.00	J851*	157	1.550	338.93	K801	129	0.285	153.10
J047	158	1.775	596.19	J863	48	3.154	400.00	K803	131	0.158	87.40
J058	139	0.232	94.71	J900	39	5.567	192.20	K804	131	0.106	56.70

All peripheries less than 100mm are deemed 100mm for surface finish purpose



Index

McKechnie®
Transforming Aluminium


SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM
K805	131	0.116	62.50	RD0200	50	0.851	62.80	SQ0500	51	6.750	200.00
K809	84	0.195	138.30	RD0206	50	0.907	64.87	SQ0508	51	6.968	203.20
K910	47	1.854	240.00	RD0222	50	1.052	69.84	SQ0635	51	10.927	254.00
K911	44	0.666	160.00	RD0238	50	1.208	74.77	TU8000	54	0.090	31.40
K943	166	1.767	392.70	RD0250	50	1.325	78.54	TU8007	54	0.192	62.83
K995	76	1.177	263.20	RD0254	50	1.375	79.80	TU8014	54	0.151	50.30
K996	44	0.938	125.40	RD0270	50	1.555	84.80	TU8018	54	0.243	78.50
M00066	150			RD0286	50	1.739	89.76	TU8020	54	0.152	49.90
M00070	150			RD0301	50	1.939	94.72	TU8030	54	0.185	59.80
M00074	150			RD0317	50	2.138	99.75	TU8035	54	0.217	69.80
M00078	150			RD0320	50	2.180	100.53	TU8040	54	0.251	79.80
M00082	150			RD0330	50	2.318	103.67	TU8050	54	0.284	89.80
M00086	150			RD0349	50	2.587	109.74	TU8055	54	0.315	99.70
N043	120	0.093	52.26	RD0365	50	2.836	114.67	TU8090	54	0.098	29.90
N064	48	3.174	379.28	RD0381	50	3.078	119.69	TU8110	54	0.136	39.90
N284	44	0.962	152.00	RD0390	50	3.237	122.50	TU8120	54	0.174	49.90
N285	43	0.432	94.85	RD0400	50	3.405	125.66	TU8140	54	0.213	59.80
N297	47	1.273	300.00	RD0413	50	3.630	129.75	TU8150	54	0.251	69.80
N452	106	1.519	505.40	RD0445	50	4.190	139.64	TU8160	54	0.290	79.80
N716	70	0.373	149.04	RD0476	50	4.829	149.60	TU8170	54	0.327	89.80
N719*	40	10.840	280.00	RD0500	50	5.321	157.08	TU8180	54	0.366	99.70
N732	32	0.707	180.00	RD0508	50	5.472	159.59	TU8185	54	0.405	109.70
N734	41	0.414	58.05	RD0520	50	5.755	163.36	TU8190	54	0.443	119.70
N736	30	4.086	317.42	RD0540	50	6.206	169.65	TU8200	54	0.482	129.70
N737	44	1.185	154.85	RD0571	50	6.926	179.54	TU8210	55	0.519	139.60
N771	53	0.423	130.00	RD0600	50	7.662	188.50	TU8215	55	0.558	149.60
N917	40	1.734	328.00	RD0603	50	7.715	189.50	TU8217	55	0.597	159.60
N952	179	1.607	310.10	RD0635	50	8.551	199.49	TU8218	54	0.300	78.50
N974	57	0.193	103.90	RD0650	50	8.993	204.20	TU8219	54	0.224	59.70
N999	120	1.039	147.20	RD0699*	50	10.361	219.59	TU8222	54	0.142	37.70
RD0060	50	0.077	18.85	SQ0064	51	0.109	25.40	TU8231	54	0.427	109.70
RD0063	50	0.086	19.95	SQ0100	51	0.271	40.00	TU8235	54	0.114	31.40
RD0077	50	0.128	24.35	SQ0120	51	0.390	48.00	TU8237	54	0.196	50.30
RD0095	50	0.193	29.94	SQ0127	51	0.435	50.08	TU8239	54	0.414	100.50
RD0096	50	0.196	30.16	SQ0159	51	0.681	63.52	TU8240	54	0.251	62.80
RD0100	50	0.213	31.42	SQ0160	51	0.694	64.00	TU8244	54	0.318	78.50
RD0111	50	0.263	34.87	SQ0190	51	0.980	76.20	TU8245	54	0.323	79.80
RD0120	50	0.306	37.70	SQ0200	51	1.084	80.00	TU8247	54	0.465	112.15
RD0127	50	0.342	39.90	SQ0250	51	1.694	100.00	TU8248	56	0.668	159.60
RD0140	50	0.417	43.98	SQ0254	51	1.741	101.60	TU8249	54	0.523	125.70
RD0159	50	0.537	49.89	SQ0318	51	2.721	127.00	TU8251	55	0.659	157.08
RD0160	50	0.545	50.30	SQ0381	51	3.919	152.40	TU8252	55	1.340	314.16
RD0175	50	0.649	54.98	SQ0400	51	4.320	160.00	TU8260	54	0.197	49.90
RD0190	50	0.769	59.85	SQ0445	51	5.335	177.80	TU8265	54	0.241	59.80

All peripheries less than 100mm are deemed 100mm for surface finish purpose



SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM
TU8290	54	0.284	39.80	TU8670	55	0.612	79.80	X273	41	1.047	109.13
TU8410	55	0.766	179.50	TU8710	55	1.311	159.60	X389	140	0.139	71.64
TU8420	55	0.859	199.50	TU8720	55	1.661	199.50	X390	136	3.825	539.66
TU8425	55	0.599	139.60	TU8725	55	1.936	199.49	X429	135	1.475	192.90
TU8432	54	0.473	100.50	TU8730	55	2.011	239.40	X472	40	2.927	204.00
TU8433	54	0.289	59.80	TU8740	55	2.361	279.30	X485	176	1.962	343.56
TU8440	54	0.390	78.50	TU8745	56	2.711	319.20	X486	176	1.894	326.16
TU8441	54	0.647	125.70	TU8747	55	2.307	238.76	X500	46	0.506	121.68
TU8442	55	0.723	139.60	TU8748	54	1.226	100.53	X510	46	0.622	120.85
TU8443	55	0.817	157.08	TU8752	55	1.567	157.08	X519	38	0.867	96.00
TU8446	55	0.986	188.50	TU8756	55	2.026	199.49	X534	77	0.430	90.55
TU8447	55	1.047	199.49	TU8760	55	3.269	314.16	X537	77	0.179	95.84
TU8448	55	1.301	251.30	TU8765	55	1.140	139.64	X540	175	1.418	528.89
TU8449	55	1.669	314.20	TU8775	54	1.470	135.10	X544	46	1.101	144.85
TU8450	55	1.243	235.62	TU8780	55	1.666	152.10	X547	44	0.922	122.85
TU8451	55	1.158	219.91	TU8787	55	2.889	239.40	X549	45	1.621	198.05
TU8460	54	0.403	79.80	TU8790	54	1.377	119.70	X550	45	4.434	277.50
TU8510	55	0.950	179.50	TU8800	55	2.290	188.50	X553	53	1.041	200.00
TU8520	55	1.282	239.39	TU8805	54	1.490	125.70	X574	130	0.249	126.32
TU8522	56	2.040	349.03	TU8806	55	1.769	146.70	X591	44	1.041	200.00
TU8523	54	0.724	119.70	TU8808	55	3.899	279.30	X592	44	1.203	160.00
TU8524	55	0.868	136.03	TU8809	55	2.490	199.50	X635	146	5.373	696.51
TU8526	55	0.922	144.50	TU8810	55	1.916	157.08	X685*	36	0.525	245.20
TU8528	55	1.629	239.40	TU8812	55	2.578	189.12	X788	30	5.694	432.27
TU8530	54	0.297	49.90	TU8813	55	2.341	188.50	X861	47	2.897	237.98
TU8555	55	1.014	152.10	TU8815	55	2.248	157.00	X903*	45	1.855	313.13
TU8558	55	1.696	279.29	TU8820	55	2.937	199.50	Z071	43	0.307	98.17
TU8559	56	2.754	398.98	TU8828	56	4.640	358.14	Z120	40	1.355	210.00
TU8560	55	1.080	159.60	TU8830	55	4.802	314.16	Z279	179	1.289	225.03
TU8575	54	0.562	78.50	TU8840	54	1.026	79.80	Z320	45	3.154	400.00
TU8580	54	0.573	79.80	TU8910	54	2.309	119.70	Z335	48	3.960	500.00
TU8590	54	0.611	84.80	TU8911	54	2.203	131.95	Z338	143	8.683	730.27
TU8600	54	0.713	99.70	TU8990	55	10.860	289.03	Z340*	129	0.751	240.51
TU8601	54	0.741	100.50	TU8991	54	0.958	127.23	Z357	47	0.500	156.85
TU8610	54	0.896	119.70	TU8992	55	1.231	152.05	Z377	85	0.672	315.32
TU8615	54	0.942	125.70	TU8993	55	1.839	235.62	Z381*	85	0.769	279.34
TU8620	55	1.059	139.60	TU8994	55	1.073	141.37	Z382	86	1.326	428.12
TU8621	55	1.145	150.80	X075	140	0.162	98.63	Z383	84	0.953	328.12
TU8630	55	1.196	157.10	X076	140	0.119	79.33	Z422	48	4.060	387.12
TU8640	55	1.216	159.60	X124	135	2.666	218.14	Z448	40	0.732	303.60
TU8649	55	1.456	188.50	X190	41	1.014	158.23	Z483	47	2.644	289.70
TU8650	55	1.374	179.10	X193	96	0.136	86.14	Z489	32	0.441	220.00
TU8651	55	1.959	251.30	X197	45	1.008	192.21	Z566	34	0.711	215.00
TU8655	55	2.478	314.20	X205	166	2.073	473.88	Z608	36	1.648	312.00

All peripheries less than 100mm are deemed 100mm for surface finish purpose



McKechnie®
Transforming Aluminium

Index

SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM	SECTION NO	PAGE NO	MASS kg/m	OUTSIDE PERM
Z716	40	8.943	266.00								
Z741	61	0.952	239.45								
Z741	149	0.952	239.45								
Z785*	129	0.749	240.25								
Z912	45	0.887	238.28								
Z913	46	0.659	178.28								
Z954	147	5.882	646.54								
Z965	32	0.470	220.00								
Z966	33	0.643	300.00								
Z980	57	0.252	127.00								



McKechnie®
Transforming Aluminium

Notes